

cGMP DRAIN FINISHING

Performance Benefits:

- No Thermal Shock
- Hygienic flooring system
- Chemical and stain resistant
- Resistance to cleaning and disinfecting agents (Steris tested)
- Simple maintenance and repair protocols to minimize downtime
- Coordinating cold welds to meet space specific needs

Sustainability Benefits:

 Contributes to better indoor air quality with products that are GREENGUARD Gold certified

Technical Department:

 For applications not covered in this document, contact the technical department: Email nta@nora.com; Use subject line "Industry" nora[®] by Interface[®] is a global leader in the design and production of high-performance rubber flooring solutions. We can help you match performance characteristics to every square foot of your facility.

Our vulcanized rubber flooring system provides a comprehensive solution within a washroom/COP CIP space due to the harsh wet environment associated with these spaces.

- Recommend using polyurea - Adhesives Technology Crackbond JF-82-Fast, or similar for sealing around drains in wet environments such as washrooms
- nora[®] cold weld options available for standard drains. Contact your nora Sales Representative for recommendations
- Concrete must be cut ³/₄ inch deep and ¹/₂ inch wide around the perimeter of the drain








cGMP DRAIN FINISHING

Trench Drain Detail

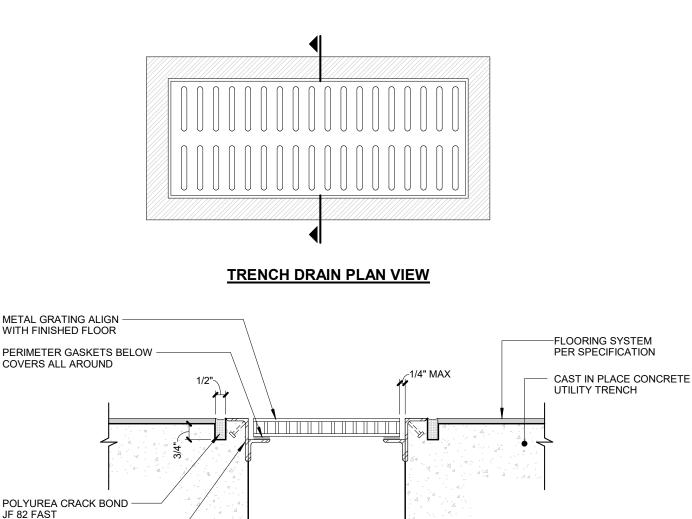

by Interface®

CONTINUOUS EMBEDDED --ANGLES AT PERIMETER OF

TRENCH