

Brushed Lines | LVT

Interface®

Earth is the ultimate influencer. Even in the most industrial of spaces, we find traces of the natural world. Worn edges. Organic forms. Dusty colors. They ground us, connect us to the here and now.


Could we achieve that same effect with different materials?

The diffused linear texture of Brushed Lines evokes the familiar qualities of hard surfaces with a light-capturing quality that sparkles on the floor. Its subtle design features 22 solid colors ranging from warm and cool neutrals to pops of earthy, mineral-like tones. Given space, Brushed Lines delivers modern refinement inspired by raw and natural motifs.

Pair Brushed Lines LVT with SoundChoice™ backing with Interface carpet tiles for an integrated flooring system of hard and soft in planks and squares. Interface modular floors allow you to move from surface to surface without the need for transition strips.

Brushed Lines LVT is fully recyclable through our ReEntry™ program and contains a significant percentage of recycled content. As part of our global portfolio, all of the flooring products that we sell - carpet tile, LVT and rubber - are carbon neutral. Impactful on the floor. Impactful on the planet.

Carbon Neutral Floors™

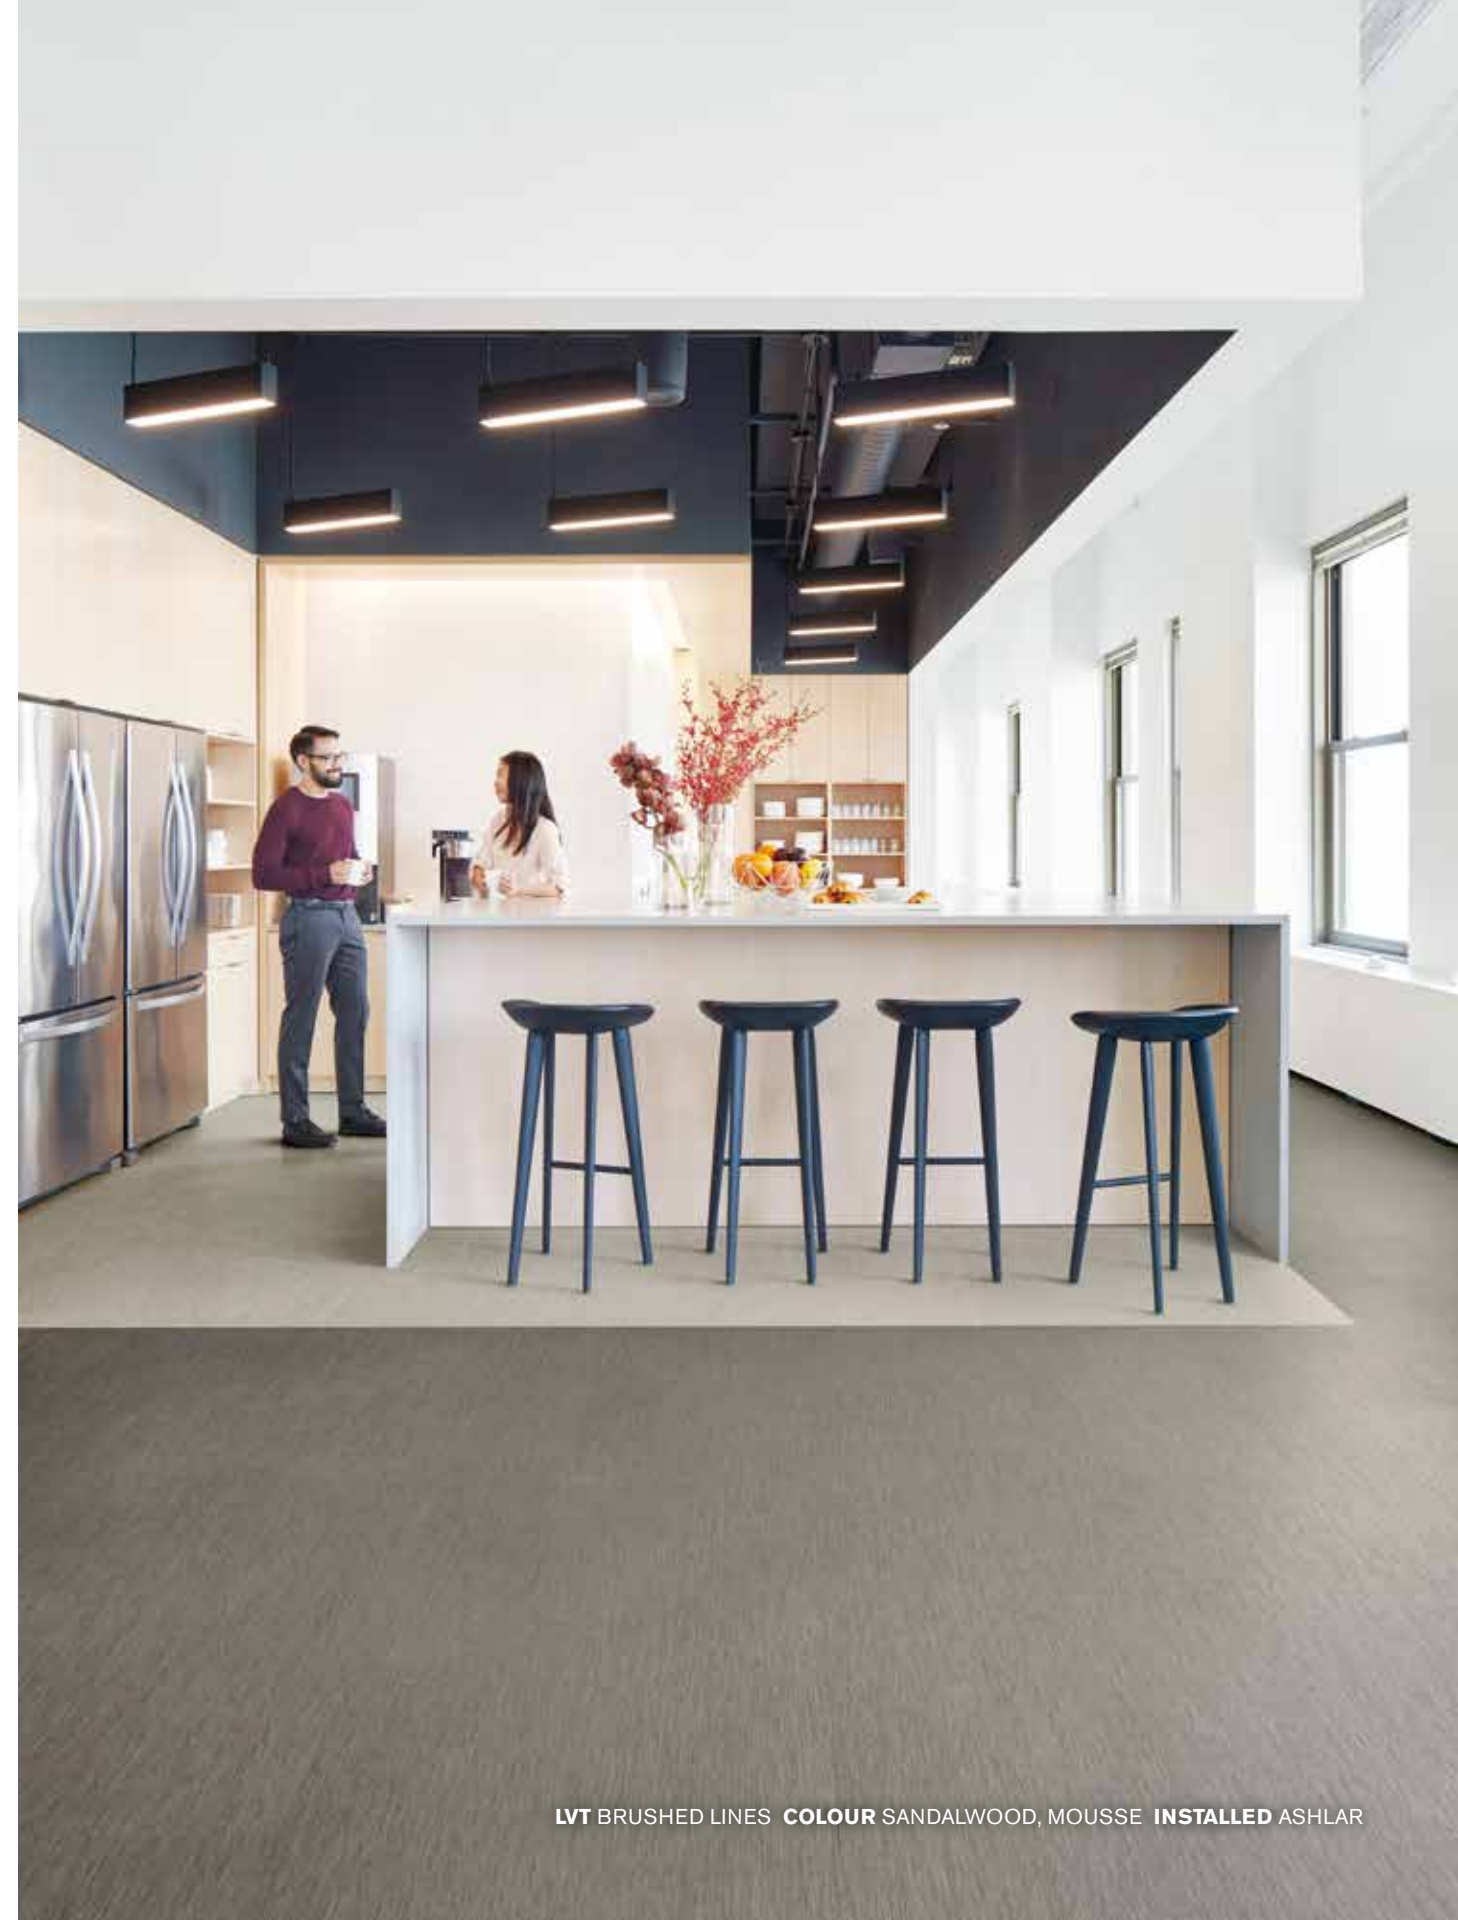



LVT BRUSHED LINES COLOUR CELADON, DEEP COBALT INSTALLED ASHLAR



LVT PRODUCT BRUSHED LINES COLOUR ALABASTER, ROUGE INSTALLED ASHLAR
CARPET PRODUCT WHEELER STREET COLOUR BROWN SQUARE INSTALLED MONOLITHIC



LVT BRUSHED LINES COLOUR GRAPHITE INSTALLED ASHLAR



LVT BRUSHED LINES COLOUR SOFT SHADOW INSTALLED ASHLAR
CARPET TILE READE STREET COLOUR IRON PLATE INSTALLED MONOLITHIC



LVT PRODUCT BRUSHED LINES **COLOUR** BLUSH **INSTALLED** ASHLAR
CARPET PRODUCT BROOME STREET **COLOUR** CORAL GLASS **INSTALLED** NON DIRECTIONAL



LVT PRODUCT BRUSHED LINES **COLOUR** ALABASTER **INSTALLED** ASHLAR
CARPET PRODUCT BROOME STREET **COLOUR** TEAL GLASS **INSTALLED** NON DIRECTIONAL
CARPET PRODUCT MERCER STREET **COLOUR** GRAPHITE CIRCLE **INSTALLED** MONOLITHIC

Brushed Lines™ Colour Range



A01601 TALC



A01607 POWDER



A01613 BLUSH



A01619 EUCALYPTUS



A01602 ALABASTER




A01608 SANDALWOOD



A01614 HONEY



A01620 TEAL OXIDE

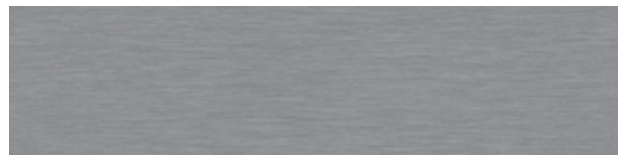

A01603 MIST



A01609 PARAFFIN



A01615 HENNA



A01621 ARBELLA



A01604 GALENA



A01610 BISQUE



A01616 ROUGE



A01622 DEEP COBALT



A01605 GRAPHITE



A01611 MOUSSE



A01617 DEW



A01606 KOHL



A01612 SOFT SHADOW



A01618 CELADON



Install next to
carpet tile **without**
transition strips.

LVT PRODUCT BRUSHED LINES COLOUR GRAPHITE
CARPET PRODUCT WHEELER STREET COLOUR SLATE SQUARE

Integrated System.

Say goodbye to transition strips and doubling up. Our modular resilient floorings are made to work as a system with our modular carpet tile. The compatible size and height of our products allows you to integrate modular carpet for an inset rug or an adjacent field – no transition strip required. You'll avoid doubling up on materials and save cost.

Real Flexibility.

Create a unique look that lasts. Interface modular resilient LVT makes it easy to extend the life of your floor. From simple maintenance like damp mopping to selectively replacing damaged tiles, your flooring investment will stand the test of time - beautifully and effortlessly.

Circular System.

Keep flooring out of the landfill. Our modular resilient LVT is produced with a controlled material stream so it can be reclaimed and recycled into our GlasBac™RE recycled content backing through our ReEntry® program.

Noise Reduction.

Less distractions. With our LVT with Sound Choice™ backing. Offering you best-in-class performance for reduced impact sound and floor to floor sound transmission.

Why Our Modular Resilient LVT?



High Performance from Top to Bottom.

1. **Ceramor® Coating.** Minimizes everyday scratching and scuffing. *Ceramor+® Coating.* Also provides enhanced slip resistance.
2. **Wear Layer.** High quality layer enabling 15 years of resilience and performance.
3. **Print Film.** Provides outstanding visuals of natural materials and Interface innovative designs.
- 4a 4b. **Core Sheet.** Creates thickness for a stronger core and reduces telegraphing from beneath.
5. **Fiberglass.** Adds dimensional stability and controlled flexibility.
6. **Sound Choice™.** Provides comfort and superior acoustic performance.

Third Party Certification.

Carbon Neutral Floors. All Interface flooring sold globally is third party verified carbon neutral. We've taken a holistic approach to achieve carbon neutrality, first through reducing the carbon footprint of our products and then using carbon offsets for the remainder.

Environmental Product Declaration (EPD). Interface LVT products are covered by an EPD. An EPD provides a comprehensive statement of product ingredients and environmental impacts based upon life cycle assessment performed to ISO standards.

Global Green Tag. A product rating system recognised by the Green Building Council of Australia, New Zealand and South Africa. It has been set up to meet the criteria of the Green Star® "Sustainable Products" credits. All Interface products are certified "Level A".

Lloyd's Register. A comprehensive standard for better PVC developed by the Green Building Council of Australia under its Green Star programme. Interface holds Lloyd's Statement of Compliance (Green Building Council of Australia Best Practice Guidelines 2013) for Best Practice PVC for all products made in Australia.

Indoor Air Quality. All Interface modular flooring products meet the highest standards for indoor air quality. Interface LVT is FloorScore® Certified, assuring very low emissions of VOCs.



Carbon Neutral Floors™



Specifications

Brushed Lines™ | LVT

Product Number	A016
Product Construction	High Performance Luxury Vinyl Tile
Wear Layer Thickness	0.55 mm
Total Thickness (Metric)	4.5 mm
Classification	EN 651 Class 33 (heavy contract) EN 651 Class 42 (light industrial general)
Acoustic Impact Noise Reduction	ISO 140.8 ΔLw = 16dB
Finish	Asia - CERAMOR™ UV Stabilized Ceramic Bead Coating ANZ - CERAMOR+™ UV Stabilized Ceramic Bead Coating
Nominal Dimensions	25cm x 100cm

Performance Specifications


Critical Heat Flux	AS ISO 9239-1	>7kW/m ²
Smoke Rate	AS ISO 9239-1	<750%.min
Size, Tolerance	ISO 24342	>400 mm < 0.35 mm
	ISO 24342	<400 mm < 0.25 mm
Dimensional Stability	ISO 23999	<0.25%
Thickness	ISO 24346	Average value + 0.20mm
Resistance to Light	ISO 105-B02	≥6
Resistance to Heat	ASTM F1514	ΔE < 8 avg Max
Resistance to Chemicals	EN-ISO 26987	Pass
Reaction to Fire	EN ISO 13501-1	Class BFI-S1
VOC Test	ISO 10580	Pass
Flexibility	ISO 24344 Method A	Pass
Static Load	ASTM F970	≤0.005" with 1500 psi
Castor chair	ISO 4918	Pass
Thermal Conductivity	EN 12667	0.16 W/mK
Static Electrical	EN 1815	<2kV
Slip Resistance	AS 4586-2013	P3 / R10

Environmental Specifications

Total Recycled Content	39%
Carbon Footprint / m ² (Cradle to Gate)*	9.2 kg CO ₂
Sustainability Assessment	NSF/ANSI 332, Meets Certification Guidelines
LEED v4	Contributes to IEQ: Low Emitting Materials; M&R: EPD and EPR
Global Green Tag	Green Rate Level A
End of Life	Fully Recyclable to carpet tile Backing Recycling

Technical Information

Installation	See Interface LVT Installation Guidelines online
Maintenance	See Interface LVT Maintenance Guidelines online
Reclamation	Recyclable through ReEntry®
Warranty	15 Year Standard LVT Product Warranty
Installation Method	Ashlar, Herringbone



Production specifications are subject to normal manufacturing tolerances and may be changed without notice. Slight variation in colour among different production lots are normal and should be considered in the overall installation plan. Products covered by manufacturer's written warranty only. All other warranties, including without limitation any implied warranties of merchantability of fitness for particular purpose, are hereby disclaimed. Contact your representative for written warranty information.

* Please see interface.com for the most up to date numbers from our EPD.



Carbon Neutral Floors™

www.interface.com

Australia

Interface Australia
local toll free: 1800 804 361

India

Interface India
tel: +91 80 4613 1313

South East Asia

Interface Asia
tel: +65 6478 1510

South Korea

Interface South Korea
tel: +82 2 555 1734

Japan

Interface Japan
tel: +81 3 5733 5211

Beijing

Interface China
tel: +86 10 6590 7810

Hong Kong

Interface China
tel: +852 2802 0838

Shanghai

Interface China
tel: +86 21 6340 3868

11/2022
SF0124T0



Climate change is undeniable. And reversible. Our mission is to prove it.
Join the #ClimateTakeBack and help create a climate fit for life.