

Drawn Lines | LVT



Drawn Lines

Fractals are repeating patterns at different scales and nature's favorite pattern-making method. Following this, Drawn Lines layers filament-fine marks in varying weights and rhythms, creating a prismatic geometry in an array of scales. Note the detail of the never-ending pattern, a finely linear matrix with softly pooling areas of light and dark and no visible repeats.

Drawn Lines is offered in 10 colours—a palette of neutrals and a few accents, sorted from warm to cool with a thread of metallic adding shimmer and depth.

Combine Drawn Lines with Interface carpet tiles side by side for an integrated flooring system of hard and soft without the need for transition strips.

And, of course, we design all our products with the ability to feed our recycling program, ReEntry®, and are mindful of our commitment to continually minimize our environmental footprint.





LVT PRODUCT DRAWN LINES COLOUR ONYX INSTALLED ASHLAR
CARPET PRODUCT VISUAL CODE | HARD DRIVE™ COLOUR LEAD HD INSTALLED ASHLAR



PRODUCT DRAWN LINES COLOURS BRONZE, AQUAMARINE INSTALLED ASHLAR

Specifications

Product Number	A009
Product Construction	High Performance Luxury Vinyl Plank
Wear Layer Thickness	0.55 mm
Total Thickness (Metric)	4.5 mm
Classification	EN 651 Class 33 (heavy contract) EN 651 Class 42 (light industrial general)
Acoustic Impact Noise Reduction	ISO 140.8 $\Delta L_w = 16$ dB
Finish	CERAMOR(tm) UV Stabilized Ceramic Bead Coating
Nominal Dimensions	25cm x 100cm

Performance Specifications


Critical Heat Flux	AS ISO 9239-1	>7kW/m ²
Smoke Rate	AS ISO 9239-1	<750%.min
Size, Tolerance	ISO 24342	>400 mm < 0.35 mm
	ISO 24342	<400 mm < 0.25 mm
Dimensional Stability	ISO 23999	<0.25%
	ISO 24346	Average value + 0.20mm
Resistance to Light	ISO 105-B02	≥6
Resistance to Heat	ASTM F1514	$\Delta E < 8$ avg Max
Resistance to Chemicals	EN-ISO 26987	Pass
Reaction to Fire	EN ISO 13501-1	Class BFI-S1
VOC Test	ISO 10580	Pass
Flexibility	ISO 24344 Method A	Pass
Static Load	ASTM F970	≤0.005" with 1500 psi
Castor chair	ISO 4918	Pass
Thermal Conductivity	EN 12667	0.16 W/mK
Static Electrical	EN 1815	<2kV
Slip Resistance	AS 4586-2013	P3 / R10

Environmental Specifications

Total Recycled Content	39%
Carbon Footprint / m ² (Cradle to Gate)*	9.2 kg CO ₂
Sustainability Assessment	NSF/ANSI 332, Meets Certification Guidelines
LEED v4	Contributes to IEQ: Low Emitting Materials; M&R: EPD and EPR
Global Green Tag	Green Rate Level A
End of Life	Fully Recyclable to carpet tile Backing Recycling

Technical Information

Installation	See Interface LVT Installation Guidelines online
Maintenance	See Interface LVT Maintenance Guidelines online
Reclamation	View details on our ReEntry® Program
Warranty	15 Year Standard LVT Product Warranty
Installation Methods	Ashlar, Herringbone



Production specifications are subject to normal manufacturing tolerances and may be changed without notice. Slight variation in colour among different production lots are normal and should be considered in the overall installation plan. Products covered by manufacturer's written warranty only. All other warranties, including without limitation any implied warranties of merchantability of fitness for particular purpose, are hereby disclaimed. Contact your representative for written warranty information.

* Please see interface.com for the most up to date numbers from our EPD.

Drawn Lines Colour Range



A009-02 TOPAZ



A009-10 OPAL



A009-03 BRONZE



A009-09 DIAMOND



A009-04 SMOKEY QUARTZ



A009-08 SILVER



A009-11 AMETHYST



A009-07 ONYX



A009-05 AMBER



A009-06 AQUAMARINE



PRODUCT DRAWN LINES COLOURS ONYX, SILVER, DIAMOND
INSTALLED PATTERN BY TILE





Install next to
carpet tile **without**
transition strips.

LVT PRODUCT DRAWN LINES COLOUR DIAMOND
CARPET PRODUCT WORLD WOVEN™ | WW880 COLOUR LINEN LOOM

Why Our Modular Resilient LVT?

Integrated System.

Say goodbye to transition strips and doubling up. Our modular resilient floorings are made to work as a system with our modular carpet tile. The compatible size and height of our products allows you to integrate modular carpet for an inset rug or an adjacent field – no transition strip required. You'll avoid doubling up on materials and save cost.

Real Flexibility.

Create a unique look that lasts. Interface modular resilient LVT makes it easy to extend the life of your floor. From simple maintenance like damp mopping to selectively replacing damaged tiles, your flooring investment will stand the test of time - beautifully and effortlessly.


Circular System.

Keep flooring out of the landfill. Our modular resilient LVT is produced with a controlled material stream so it can be reclaimed and recycled into our GlasBac™RE recycled content backing through our ReEntry® program.

Noise Reduction.

Less distractions. With our LVT with Sound Choice™ backing. Offering you best-in-class performance for reduced impact sound and floor to floor sound transmission.

Why Our Modular Resilient LVT?

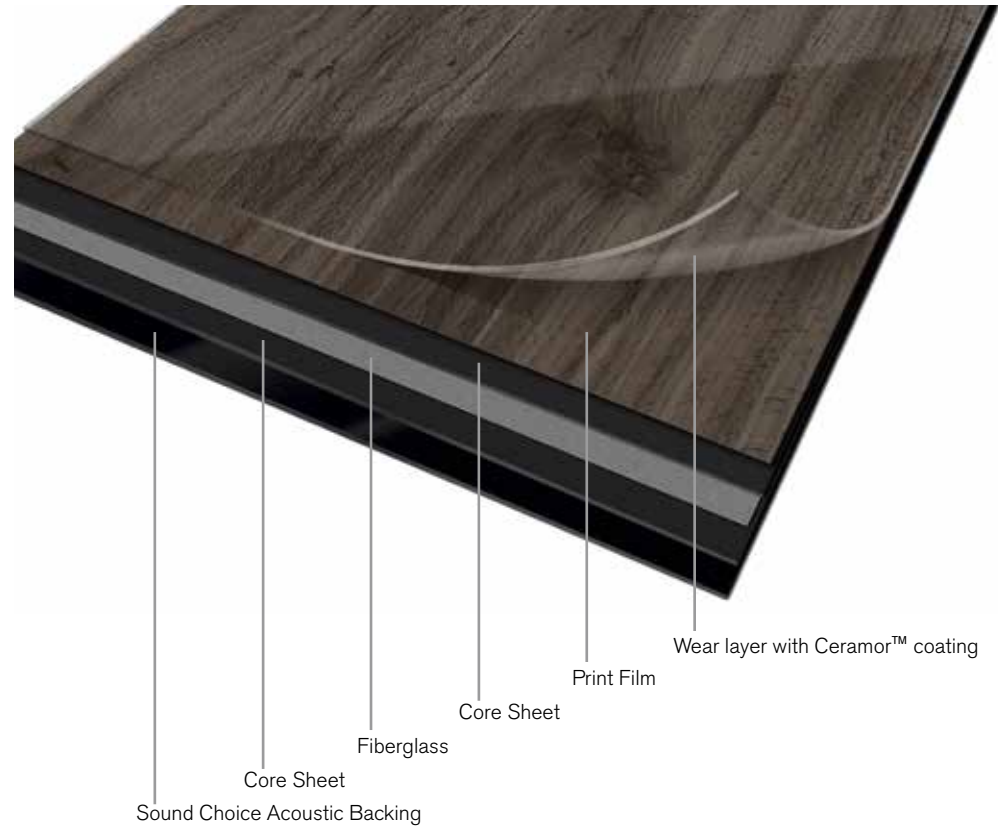

High Performance from Top to Bottom.

From our Ceramor™ Top Coat to our Sound Choice™ backing, we've designed our modular resilient LVT to provide peak performance in even the most challenging work environment while also providing superior sound absorption.

Abrasion Resistance. Our Ceramor ceramic bead coating provides a durable finish that resists scratching and scuffing so your floors look better longer. Embossing adds texture to further enhance durability.

A Strong Core. Incorporating a fiberglass layer between two core sheets provides optimal dimensional stability and flexibility, allowing for a fully modular installation and the ability to move and update with ease.

Quiet Comfort. (or just "Quiet.") With an IIC rating of 57 our Sound Choice backing provides superior protection against vertical sound transfer. Minimizing noise enhances workplace productivity and creates more usable, comfortable spaces.





Carbon Neutral Floors™

www.interface.com

Australia

Interface Australia
local toll free: 1800 804 361

India

Interface India
tel: +91 80 4613 1313

South East Asia

Interface Asia
tel: +65 6478 1510

South Korea

Interface South Korea
tel: +82 2 555 1734

Japan

Interface Japan
tel: +81 3 5733 5211

Beijing

Interface China
tel: +86 10 6590 7810

Hong Kong

Interface China
tel: +852 2802 0838

Shanghai

Interface China
tel: +86 21 6340 3868

11/2022
SF0108T0



Climate change is undeniable. And reversible. Our mission is to prove it.
Join the #ClimateTakeBack and help create a climate fit for life.