

LEVEL SET™ COLLECTION **LVT** | TEXTURED WOODGRAINS & STONES

Interface Hospitality



With thoughtful consideration for design, performance and a sustainable path, we've created an offering of luxury vinyl tile to fit perfectly into the Interface Hospitality modular flooring system.

We debut with Level Set,[™] a collection of 36 options sorted into two groupings. Level Set Natural Woodgrains & Stones is a selection of 25cm x 1m planks and 50cm x 50cm squares in classic wood and stone looks. Level Set Textured Woodgrains & Stones, offered in the same formats, presents patterns inspired by distressed, reclaimed and exposed materials.

Level Set Collection is not only a perfect match to our Skinny Planks[™] and square carpet tiles, it is also a perfect fit in terms of thickness. This means you can easily install our resilient and soft flooring to create an integrated floor or inset rug in a guest room or public space, and move effortlessly from surface to surface without transition strips.

Level Set Collection is constructed with a backing similar to our carpet tiles—allowing for the unmatched ease of our glue-free TacTiles[®] installation system. And, of course, we've designed it with attention to our environmental footprint and the ability to feed our recycling program, ReEntry[®].



A

B

COVER
LVT PRODUCT: Textured Woodgrains
SIZE: 25cm x 1m
COLOR: Dark Walnut
INSTALLATION: Ashlar

COLLECTION: The Rug Collection
by Interface Hospitality™
CARPET PRODUCT: Roman Holiday™
SIZE: 50cm x 50cm
COLOR: Arcadia
INSTALLATION: Monolithic

Page 3 A
LVT PRODUCT: Textured Woodgrains
SIZE: 25cm x 1m
COLOR: Grey Dune
INSTALLATION: Ashlar

Page 3 B
COLLECTION: World Woven™
CARPET PRODUCT: WW880
SIZE: 25cm x 1m
COLOR: Black Loom
INSTALLATION: Ashlar

A
PRODUCT: Textured Woodgrains
SIZE: 25cm x 1m
COLOR: Silver Walnut
INSTALLATION: Ashlar

B
PRODUCT: Textured Woodgrains
SIZE: 25cm x 1m
COLOR: White Wash
INSTALLATION: Pattern by Tile





B

A

PRODUCT: Textured Stones
SIZE: 50cm x 50cm
COLOR: Warm Polished Cement
INSTALLATION: Non Directional



A LVT PRODUCT: Textured Woodgrains
SIZE: 28cm x 1m
COLOR: Ash Walnut
INSTALLATION: Ashlar

B COLLECTION: Urban Retreat™
CARPET PRODUCT: UR102
SIZE: 50cm x 50cm
COLOR: Ash
INSTALLATION: Quarter-Turn



B
A

PRODUCT SPECIFICATIONS

General Product Information

Product Number

A004

Product Construction

High Performance Luxury Vinyl Tile

Class / ASTM F1700

Class III Printed Vinyl Plank

Wear Layer Thickness

22 mil

Total Thickness

4.5 mm

Backing Class

Commercial Grade

Finish

Ceramor™ Coating

Nominal Dimensions

25cm x 1m (9.845 in x 39.38 in)

Installation Recommendation

Floating Floor with TacTiles® Glue-Free Installation System

Performance

IIC Sound Rating

(ASTM E492-09) 57 IIC

Slip Resistance

(ASTM D2047) >0.55 wet/dry, ADA Compliant

Static Load Limit

(ASTM F970) 1500 psi

Flexibility

(ASTM F137) Passes

Resistance to Heat

(ASTM F1514) Passes

Resistance to Light

(ASTM F1515) Passes

Radiant Flux

(ASTM E648) Class I

NBS Smoke Density

(ASTM E662) Passes, ≤450

Size & Squareness

(ASTM F2055) Passes, +/- 0.016 in. per linear ft.

Thickness

(ASTM F386) Passes

Dimensional Stability

(ASTM F2199) Passes

Residual Indentation

(ASTM F1914) Passes

Resistance to Chemicals

(ASTM F925) Passes

Environmental

Indoor Air Quality

FloorScore®/CDPH 01350 Certified for low-VOC emissions

Material Composition

Free of Ortho Phthalates, Added Formaldehyde and Heavy Metal Stabilizers

Ingredients & Life Cycle Impacts

Environmental Product Declaration

Carbon Footprint

3rd Party Verified Carbon Neutral

Sustainability Assessment

NSF/ANSI 332, Meets Certification Guidelines

LEED v4

Contributes to IEQ: *Low Emitting Materials*; M&R: *EPD* and *EPR*

End of Life

Fully Recyclable LVT to Carpet Tile Backing Recycling

Packaging

Quantity per Carton

26.91 sq. ft. (2.5 m²)

Pieces per Carton

10

Weight per Carton

47 lbs (21 kg)

Cartons per Pallet

40

Pallets per Truckload

20

Technical Information

Installation

See Interface LVT Installation Guidelines online

Maintenance

See Interface LVT Maintenance Guidelines online

Reclamation

Recyclable through ReEntry® - Call 1.888.733.6873 (U.S.) / 1.866.398.3191 (Canada)

Warranty

15 Year Limited Commercial Warranty

Installation Methods

Ashlar, Herringbone



TEXTURED WOODGRAINS

COLORLINE



A00401 DISTRESSED WALNUT



A00402 DISTRESSED CASHEW



A00403 DISTRESSED HICKORY



A00404 DISTRESSED BLACK WALNUT



A00405 GREY DUNE



A00406 ANTIQUE LIGHT OAK




A00407 WHITE WASH



A00408 ANTIQUE GRAY OAK



A00409 ASH WALNUT

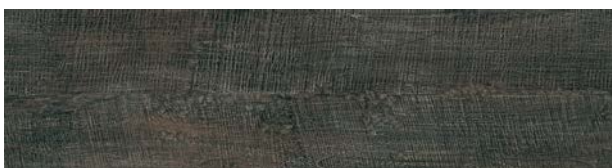

A00410 SILVER WALNUT



A00411 DARK WALNUT



A00412 RECLAIMED HICKORY

A LVT PRODUCT: Textured Woodgrains
SIZE: 25cm x 1m
COLOR: Distressed Walnut
INSTALLATION: Ashlar

B COLLECTION: World Woven
CARPET PRODUCT: WW880
SIZE: 25cm x 1m
COLOR: Linen Loom
INSTALLATION: Ashlar





B
A

A
PRODUCT: Textured Stones
SIZE: 50cm x 50cm
COLOR: Cool Polished Cement
INSTALLATION: Pattern by Tile

B
PRODUCT: Textured Stones
SIZE: 50cm x 50cm
COLOR: Emperor Gray
INSTALLATION: Pattern by Tile



A

B

A LVT PRODUCT: Textured Stones
SIZE: 50cm x 50cm
COLOR: Jersey
INSTALLATION: Non Directional

B COLLECTION: World Woven
CARPET PRODUCT: WW880
SIZE: 25cm x 1m
COLOR: Brown Loom
INSTALLATION: Ashlar



B
A

PRODUCT SPECIFICATIONS

General Product Information

Product Number

A003

Product Construction

High Performance Luxury Vinyl Tile

Class / ASTM F1700

Class III Printed Vinyl Tile

Wear Layer Thickness

22 mil

Total Thickness

4.5 mm

Backing Class

Commercial Grade

Finish

Ceramor™ Coating

Nominal Dimensions

50cm x 50cm (19.69 in x 19.69 in)

Installation Recommendation

Floating Floor with TacTiles® Glue-Free Installation System

Performance

IIC Sound Rating

(ASTM E492-09) 57 IIC

Slip Resistance

(ASTM D2047) >0.55 wet/dry, ADA Compliant

Static Load Limit

(ASTM F970) 1500 psi

Flexibility

(ASTM F137) Passes

Resistance to Heat

(ASTM F1514) Passes

Resistance to Light

(ASTM F1515) Passes

Radiant Flux

(ASTM E648) Class I

NBS Smoke Density

(ASTM E662) Passes, ≤450

Size & Squareness

(ASTM F2055) Passes, +/- 0.016 in. per linear ft.

Thickness

(ASTM F386) Passes

Dimensional Stability

(ASTM F2199) Passes

Residual Indentation

(ASTM F1914) Passes

Resistance to Chemicals

(ASTM F925) Passes

Environmental

Indoor Air Quality

FloorScore®/CDPH 01350 Certified for low-VOC emissions

Material Composition

Free of Ortho Phthalates, Added Formaldehyde and Heavy Metal Stabilizers

Ingredients & Life Cycle Impacts

Environmental Product Declaration

Carbon Footprint

3rd Party Verified Carbon Neutral

Sustainability Assessment

NSF/ANSI 332, Meets Certification Guidelines

LEED v4

Contributes to IEQ: *Low Emitting Materials*; M&R: *EPD and EPR*

End of Life

Fully Recyclable LVT to Carpet Tile Backing Recycling

Packaging

Quantity per Carton

26.91 sq. ft. (2.5 m²)

Pieces per Carton

10

Weight per Carton

47 lbs (21 kg)

Cartons per Pallet

40

Pallets per Truckload

20

Technical Information

Installation

See Interface LVT Installation Guidelines online

Maintenance

See Interface LVT Maintenance Guidelines online

Reclamation

Recyclable through ReEntry® - Call 1.888.733.6873 (U.S.) / 1.866.398.3191 (Canada)

Warranty

15 Year Limited Commercial Warranty

Installation Methods

Non Directional, Ashlar, Brick, Monolithic, Quarter-Turn



COLORLINE



A00301 POLISHED CEMENT



A00304 EMPERADOR GRAY



A00302 COOL POLISHED CEMENT



A00305 EMPERADOR TAUPE



A00303 WARM POLISHED CEMENT



A00306 JERSEY MARBLE

A LVT PRODUCT: Textured Woodgrains
SIZE: 28cm x 1m
COLOR: Antique Light Oak
INSTALLATION: Ashlar

B COLLECTION: World Woven
CARPET PRODUCT: WW895
SIZE: 28cm x 1m
COLOR: Moorland Weave
INSTALLATION: Ashlar




A

B



WHY OUR MODULAR RESILIENT FLOORING?

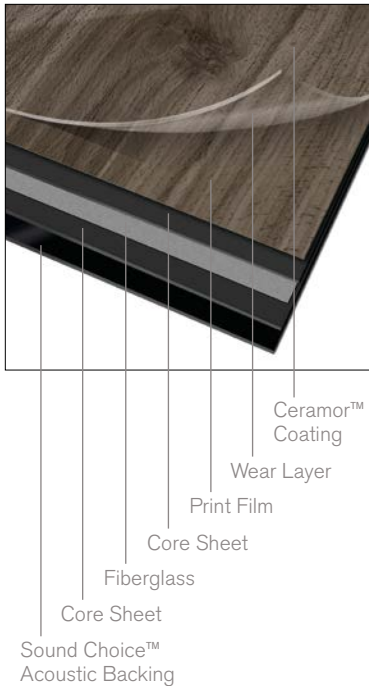

Integrated System.

Say goodbye to transition strips and doubling up. Our modular resilient floorings are made to work as a system with our modular carpet. The compatible size and height of our products allows you to integrate modular carpet for an inset rug or an adjacent field – no transition strip required. You'll avoid doubling up on materials and save money.

Glue-free Installation.

Create faster, cleaner and more flexible installations. Our TacTiles® installation system eliminates the need for glue, adhering tiles securely together to form a flexible, "floating" floor. Unlike click or adhesive-based products, simply lift, remove and replace damaged or worn tiles. The result? Less mess, less waste and virtually zero VOCs, not to mention an environmental footprint that is over 90% lower than that of traditional glue adhesives.

Circular System.

Keep flooring out of the landfill. Our modular resilient LVT is produced with a controlled material stream so it can be reclaimed and recycled into our GlasBac®RE recycled content backing through our ReEntry® program.

High Performance from Top to Bottom.

From our Ceramor™ coating to our Sound Choice™ backing, we've designed our modular resilient LVT to provide peak performance in even the most challenging work environment while also providing superior sound absorption.

Abrasion Resistance. Our Ceramor ceramic bead coating provides a durable finish that resists scratching and scuffing so your floors look better longer. Embossing adds texture to further enhance durability.

A Strong Core. Incorporating a fiberglass layer between two core sheets provides optimal dimensional stability and flexibility, allowing for a glue-free installation and the ability to move and update with ease.

Quiet Comfort. With an IIC rating of 57, our Sound Choice backing provides superior protection against vertical sound transfer. Minimizing noise creates more comfortable spaces and enhances guest experience.

Third Party Certification.

Low Carbon Option. ALL Interface LVT sold in North America is third party verified carbon neutral under our long-standing Cool Carpet™ program. Cool Carpet offsets all greenhouse gas (GHG) emissions associated with the entire lifecycle of the product.

Environmental Product Declaration (EPD). Interface LVT products are covered by an EPD. An EPD provides a comprehensive statement of product ingredients and environmental impacts based upon life cycle assessment performed to ISO standards.

Sustainable Assessment. Interface LVT meets the certification standards of the NSF/ANSI 332 Sustainability Assessment for Resilient Floor Coverings. This standard evaluates the environmental impact of resilient floor covering for its entire lifecycle.

Indoor Air Quality. All Interface modular flooring products meet the highest standards for indoor air quality. Interface LVT is FloorScore® Certified, assuring very low emissions of VOCs.


cool carpet™



CERTIFIED BY SCC Global Services

All product specifications reflect averages derived from product sample testing, are subject to normal manufacturing and testing tolerances and inherent pattern variances, and may be changed without notice. For more information about these and other important attributes of the product(s) described herein, including recycled content and product warranty information, please see our full LVT product disclaimer @ interface.com.

Install Interface Hospitality
Modular Resilient Flooring and
Modular Carpet with our TacTiles®
glue-free installation system.
No transition strip needed.

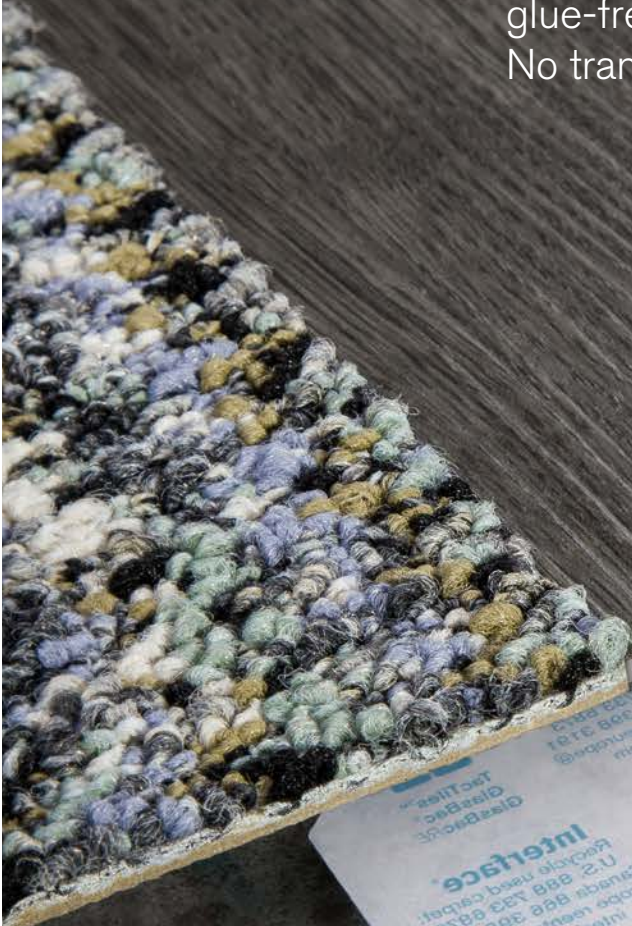

B COLLECTION: World Woven
CARPET PRODUCT: WW895
SIZE: 25cm x 1m
COLOR: Heather Weave

A LVT PRODUCT: Natural Woodgrains
SIZE: 25cm x 1m
COLOR: Storm



RECYCLED
Paper made from
recycled material
FSC® C009723



PLEASE RECYCLE

Printed on 50% post consumer waste (PCW)
fiber manufactured using wind power.

We have tried our very best to accurately
represent product colors. However, due to
the nature of printed materials, color of actual
products may vary slightly. Please request a
sample to see actual product color.

www.interfacehospitality.com

United States Headquarters

1503 Orchard Hill Road
LaGrange, GA 30240
1.800.336.0225 ext.56511

Canadian Headquarters

233 Lahr Drive
Belleville, ON K8N 5S2
1.800.267.2149 ext.52128

Brazilian Headquarters

Rua Surubim, 577 - Conjuntos
73/74 7º Andar
04571-050 - São Paulo - SP
+ 55 11 2196 0900

Latin American Headquarters

Montes Urales # 415 Piso 6
Col. Lomas de Chapultepec
México City, D.F. 11000
Mexico
+ 52 55 6395 5100

CIM # IFS00764 03/2017



Mission Zero®

our promise to eliminate any
negative impact our company
may have on the environment
by the year 2020.