



# Level Set Collection | LVT

Natural Woodgrains

**Interface®**



With thoughtful consideration for design, performance and a sustainable path, we've crafted the Level Set™ Collection as a foundational set of luxury vinyl tiles that fit perfectly into the Interface flooring systems. Level Set Natural Woodgrains is a selection of 25 cm x 1 m planks in classic wood looks and a smooth finish offered in a range of earthy neutrals.

A perfect companion to our carpet tile and nora® rubber flooring, you can create an integrated floor or inset rug and move effortlessly from surface to surface with multiple options that allow for no transition strips. Both our 3.0 mm and 4.5 mm formats feature a durable Ceramor™ coating that provides a scratch-resistant finish, and our 4.5 mm LVT supports even better noise reduction with its Sound Choice™ backing system.

At Interface, we're 'all in' on becoming a restorative business, driving toward positive impacts. As part of our commitment, Natural Woodgrains contains 39% recycled content and is recyclable in the 4.5 mm format through our ReEntry™ program.

















Specifications

Product Number	A002
4.5 mm	C009
3.0 mm	High Performance Luxury Vinyl Tile
Product Construction	Class III Printed Vinyl Tile
Class/ASTM F1700	22 mil
Wear Layer Thickness	4.5 mm and 3.0 mm options available
Total Thickness	Commercial Grade
Backing Class	Ceramor™ Coating
Finish	25 cm x 1 m (9.845 in x 39.38 in)
Nominal Dimensions	39%
Total Recycled Content	
(Pre Consumer)	
Indoor Air Quality	GREENGUARD Gold
	FloorScore® Certified
	CDPH 01350 Compliant
Environmental Certifications	NSF/ANSI 332 Silver
LEED v4	Contributes to multiple IEQ and MR credits

View the full product specification on interface.com

Installation Methods



ASHLAR



HERRINGBONE

Ready for More?

Find the latest Colour options, formats and full specifications on Interface.com. Create an account or login to take the next step for your project.

4.5 mm LVT



CHECK AVAILABILITY  
ORDER SAMPLES

3.0 mm LVT



CHECK AVAILABILITY  
ORDER SAMPLES

Natural Woodgrains™ Color Range



4.5 mm A00201 BLACK WALNUT




4.5 mm A00202 MADAGASCAR



4.5 mm A00203 CHESTNUT



4.5 mm A00204 BEECH  
3.0 mm C00901 BEECH

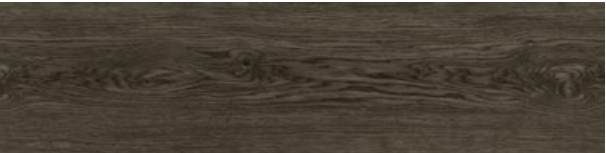

4.5 mm A00205 STORM




4.5 mm A00206 WINTER GREY



4.5 mm A00207 WASHED WHEAT  
3.0 mm C00906 WASHED WHEAT



4.5 mm A00208 SAND DUNE  
3.0 mm C00903 SAND DUNE

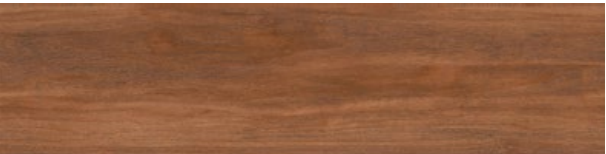

4.5 mm A00209 MAHOGANY



4.5 mm A00210 TEAK  
3.0 mm C00904 TEAK



4.5 mm A00211 WASHED MAPLE  
3.0 mm C00905 WASHED MAPLE




4.5 mm A00212 CEDAR  
3.0 mm C00902 CEDAR







Why Our Modular Resilient LVT?



Integrated System

*Save time and look good doing it.* Our LVT integrates with our full product portfolio, allowing you to streamline specification and installation. Add our modular carpet for an inset rug or nora® in an adjacent field.

For a no transition strip solution, opt for our:

- 4.5 mm LVT to any carpet tile
- 3.0 mm LVT to most 17 oz or less carpet tile on GlasBac™ or CQuest™GB backing
- 3.0 mm LVT to our nora rubber flooring



Easy Maintenance

*Create a unique look that lasts.* Interface LVT extends the life of your floor. From simple damp mopping to selectively replacing 4.5 mm Sound Choice LVT tiles, your flooring investment will stand the test of time - beautifully and effortlessly.



ReEntry™

*Keep flooring out of the landfill.* All of our LVT is produced with a controlled material stream, and 4.5 mm Sound Choice LVT can be reclaimed and recycled along with Interface carpet tile through our ReEntry program. ReEntry is the only third party certified recycling system among North American flooring manufacturers.




Noise Reduction

*Silence distractions.* 4.5 mm Sound Choice is a specially formulated backing for superior noise reduction, offering you best-in-class impact sound reduction and floor to floor sound transmission.




High Performance from Top to Bottom

4.5 mm Sound Choice™ LVT

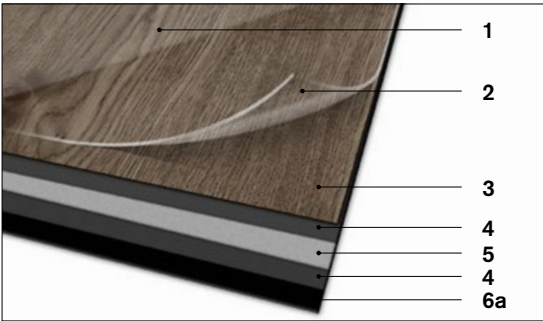

3.0 mm LVT

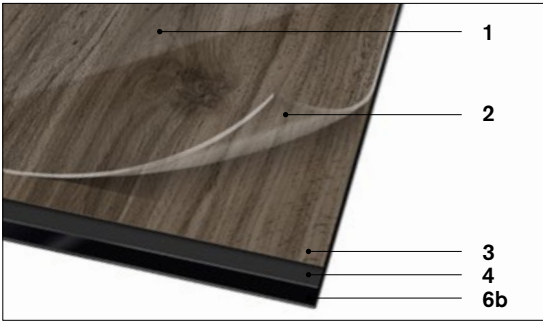

- 1. Ceramor™ Coating.** Scratch and scuff resistant, UV stabilized ceramic bead coating.
- 2. Wear Layer.** High quality, 22 mil layer enabling 15 years of resilience and performance.
- 3. Print Film.** High definition wood looks, stone looks and innovative Interface designs.
- 4. Core Sheet.** Provides stabilization and reduces telegraphing from beneath.
- 5. Fiberglass.** Adds dimensional stability and controlled flexibility.
- 6a. Sound Choice Backing.** Provides added comfort and superior acoustic performance.
- b. Backing.** Provides greater resistance to residual indentation.



Environmental Product Declaration (EPD)

A third party verified statement of product ingredients and environmental impacts over the entire life cycle of a product.



GREENGUARD Gold & FloorScore®

Meeting the highest standards for indoor air quality and assuring very low emissions of VOCs, Interface LVT is GREENGUARD Gold and FloorScore® Certified and CDPH 01350 compliant.



Health Product Declaration (HPD)

A transparency tool for evaluating if a product includes materials of concern and whether it supports Green Chemistry.



NSF/ANSI 332 Silver

This standard evaluates the environmental impact of resilient floor covering for its entire life cycle.

📍 Samples

Register and order samples at [interface.com](https://www.interface.com). Not near a computer? You can also request samples by calling one of the numbers below.

United States  
1.877.605.1500

Canada  
1.866.398.3192

[interface.com](https://www.interface.com)

Do more on [interface.com](https://www.interface.com)

- Browse products and order samples
- Save and share favorites
- See images of products in a variety of room scenes
- Browse floor designs, change colors, upload your own image, download and share
- Get full specifications, sustainability certifications and more
- Check order status and inventory availability
- Sign up to get the latest information on Interface products and news

We have tried our very best to accurately represent product colors. However, due to the nature of printed materials, color of actual products may vary slightly. Please request a sample to see actual product color.

All product specifications reflect averages derived from product sample testing, are subject to normal manufacturing and testing tolerances and inherent pattern variances, and may be changed without notice. For more information about these and other important attributes of the product(s) described herein, including recycled content and product warranty information, please see [interface.com/disclaimer](https://www.interface.com/disclaimer).





Printed on 50% post consumer waste (PCW)  
fiber manufactured using wind power.

**interface.com**

**United States Headquarters**

1280 West Peachtree Street NW  
Atlanta, GA 30309  
1.800.634.6032

**Canadian Headquarters**

233 Lahr Drive  
Belleville, ON K8N 5S2  
1.800.267.2149 ext. 52128

CIM# IFS00951 10/2024