



# Level Set Collection | LVT

Textured Woodgrains

**Interface®**



With thoughtful consideration for design, performance and a sustainable path, we've crafted the Level Set™ Collection as a foundational set of luxury vinyl tiles that fit perfectly into the Interface flooring systems. Level Set Textured Woodgrains is a selection of 25 cm x 1 m planks in classic wood looks and a highly textured finish inspired by distressed, reclaimed and saw cut patterns, offered in a range of earthy neutrals.

A perfect companion to our carpet tile and nora® rubber flooring, you can create an integrated floor or inset rug and move effortlessly from surface to surface with multiple options that allow for no transition strips. Both our 3.0 mm and 4.5 mm formats feature a durable Ceramor™ coating that provides a scratch-resistant finish, and our 4.5 mm LVT supports even better noise reduction with its Sound Choice™ backing system.

At Interface, we're 'all in' on becoming a restorative business, driving toward positive impacts. As part of our commitment, Textured Woodgrains contains 39% recycled content and is recyclable in the 4.5 mm format through our ReEntry™ program.













Specifications

Product Number	A004
4.5 mm	C014
3.0 mm	
Product Construction	High Performance Luxury Vinyl Tile
Class/ASTM F1700	Class III Printed Vinyl Tile
Wear Layer Thickness	22 mil
Total Thickness	4.5 mm and 3.0 mm options available
Backing Class	Commercial Grade
Finish	Ceramor™ Coating
Nominal Dimensions	25 cm x 1 m (9.845 in x 39.38 in)
Total Recycled Content (Pre Consumer)	39%
Indoor Air Quality	GREENGUARD Gold FloorScore® Certified CDPH 01350 Compliant NSF/ANSI 332 Silver Contributes to multiple IEQ and MR credits
Environmental Certifications	
LEED v4	

View the full product specification on interface.com

Installation Methods



ASHLAR



HERRINGBONE

Ready for More?

Find the latest Colour options, formats and full specifications on Interface.com. Create an account or login to take the next step for your project.

4.5 mm LVT



CHECK AVAILABILITY  
ORDER SAMPLES

3.0 mm LVT



CHECK AVAILABILITY  
ORDER SAMPLES

Textured Woodgrains Color Range



4.5 mm A00401 DISTRESSED WALNUT



4.5 mm A00402 DISTRESSED CASHEW



4.5 mm A00403 DISTRESSED HICKORY



4.5 mm A00405 GREY DUNE




4.5 mm A00406 ANTIQUE LIGHT OAK  
3.0 mm C01402 ANTIQUE LIGHT OAK



4.5 mm A00407 WHITE WASH



4.5 mm A00409 ASH WALNUT

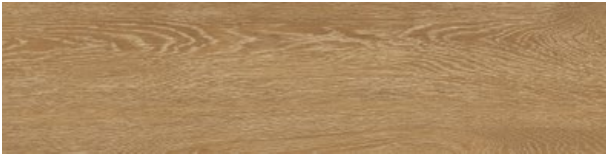

4.5 mm A00415 ANTIQUE OAK



4.5 mm A00416 ANTIQUE DARK OAK  
3.0 mm C01401 ANTIQUE DARK OAK



4.5 mm A00417 SILVER DUNE



4.5 mm A00418 CHARCOAL DUNE



4.5 mm A00420 RUSTIC CASHEW




4.5 mm A00421 RUSTIC OAK



4.5 mm A00422 RUSTIC HICKORY



4.5 mm A00423 RUSTIC ASH

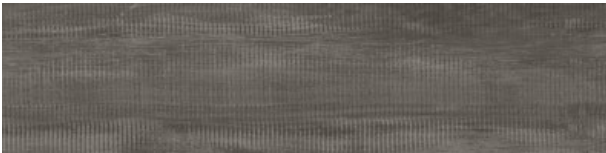

4.5 mm A00425 RUSTIC CHARCOAL



4.5 mm A00426 SUGARPINE



4.5 mm A00427 HEMLOCK











Why Our Modular Resilient LVT?



**Integrated System**  
*Save time and look good doing it.* Our LVT integrates with our full product portfolio, allowing you to streamline specification and installation. Add our modular carpet for an inset rug or nora® in an adjacent field.

- For a no transition strip solution, opt for our:
- 4.5 mm LVT to any carpet tile
  - 3.0 mm LVT to most 17 oz or less carpet tile on GlasBac™ or CQuest™GB backing
  - 3.0 mm LVT to our nora rubber flooring



**Easy Maintenance**  
*Create a unique look that lasts.* Interface LVT extends the life of your floor. From simple damp mopping to selectively replacing 4.5 mm Sound Choice LVT tiles, your flooring investment will stand the test of time - beautifully and effortlessly.



**ReEntry™**  
*Keep flooring out of the landfill.* All of our LVT is produced with a controlled material stream, and 4.5 mm Sound Choice LVT can be reclaimed and recycled along with Interface carpet tile through our ReEntry program. ReEntry is the only third party certified recycling system among North American flooring manufacturers.




**Noise Reduction**  
*Silence distractions.* 4.5 mm Sound Choice is a specially formulated backing for superior noise reduction, offering you best-in-class impact sound reduction and floor to floor sound transmission.




High Performance from Top to Bottom

4.5 mm Sound Choice™ LVT

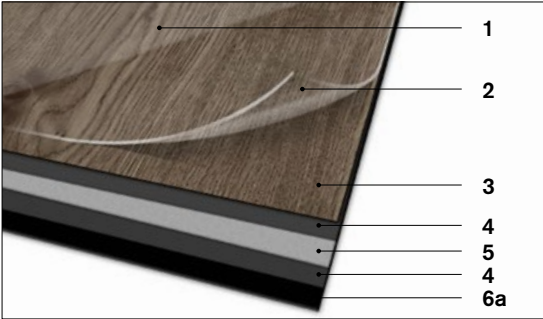

3.0 mm LVT

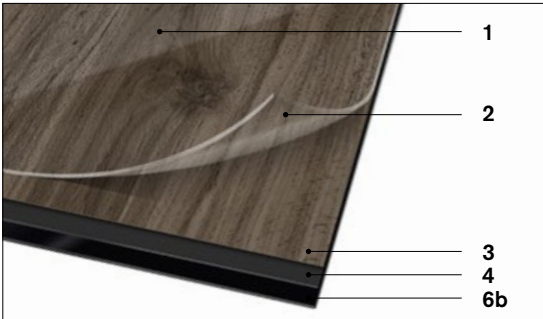

- 1. **Ceramor™ Coating.** Scratch and scuff resistant, UV stabilized ceramic bead coating.
- 2. **Wear Layer.** High quality, 22 mil layer enabling 15 years of resilience and performance.
- 3. **Print Film.** High definition wood looks, stone looks and innovative Interface designs.
- 4. **Core Sheet.** Provides stabilization and reduces telegraphing from beneath.
- 5. **Fiberglass.** Adds dimensional stability and controlled flexibility.
- 6a. **Sound Choice Backing.** Provides added comfort and superior acoustic performance.
- b. **Backing.** Provides greater resistance to residual indentation.



**Environmental Product Declaration (EPD)**  
A third party verified statement of product ingredients and environmental impacts over the entire life cycle of a product.



**GREENGUARD Gold & FloorScore®**  
Meeting the highest standards for indoor air quality and assuring very low emissions of VOCs, Interface LVT is GREENGUARD Gold and FloorScore® Certified and CDPH 01350 compliant.



**Health Product Declaration (HPD)**  
A transparency tool for evaluating if a product includes materials of concern and whether it supports Green Chemistry.



**NSF/ANSI 332 Silver**  
This standard evaluates the environmental impact of resilient floor covering for its entire life cycle.

📍 **Samples**

Register and order samples at [interface.com](https://www.interface.com). Not near a computer? You can also request samples by calling one of the numbers below.

United States  
1.877.605.1500

Canada  
1.866.398.3192

**interface.com**

- Do more on [interface.com](https://www.interface.com)
- Browse products and order samples
  - Save and share favorites
  - See images of products in a variety of room scenes
  - Browse floor designs, change colors, upload your own image, download and share
  - Get full specifications, sustainability certifications and more
  - Check order status and inventory availability
  - Sign up to get the latest information on Interface products and news

We have tried our very best to accurately represent product colors. However, due to the nature of printed materials, color of actual products may vary slightly. Please request a sample to see actual product color.

All product specifications reflect averages derived from product sample testing, are subject to normal manufacturing and testing tolerances and inherent pattern variances, and may be changed without notice. For more information about these and other important attributes of the product(s) described herein, including recycled content and product warranty information, please see [interface.com/disclaimer](https://www.interface.com/disclaimer).





Printed on 50% post consumer waste (PCW)  
fiber manufactured using wind power.

**interface.com**

**United States Headquarters**

1280 West Peachtree Street NW  
Atlanta, GA 30309  
1.800.634.6032

**Canadian Headquarters**

233 Lahr Drive  
Belleville, ON K8N 5S2  
1.800.267.2149 ext. 52128

CIM# IFS00956 10/2024