



Level Set | **LVT**  
Stones & Woodgrains


Interface®

**Hard meets soft, creating a perfect match**

Hard and soft comes together in perfect unity to create a whole new world of inspired floor designs. Our LVT selections of natural and textured wood-grains and creative stones have been thoughtfully designed -- they perfectly integrate, complementing the same natural inspirations seen in our extensive carpet tiles range. No matter how you arrange them, these are designed to mix and flow seamlessly together. In fact, they fit like a glove without the need for transition strips.

Interface LVT is constructed from a combination of highly durable, recyclable layers. Scuffs and scratches from everyday wear are minimized by Ceramor®, a ceramic bead coating that protects the surface layer of the tile. A high performance backing layer, Sound Choice™ acts in the same way as our carpet tiles, reducing noise impact levels and delivering outstanding acoustic properties. And all these are backed by the same 15-year product warranty too.

Get the best of both worlds by pairing LVT with modular carpet tiles, and say hello to harmonious, gorgeous style.

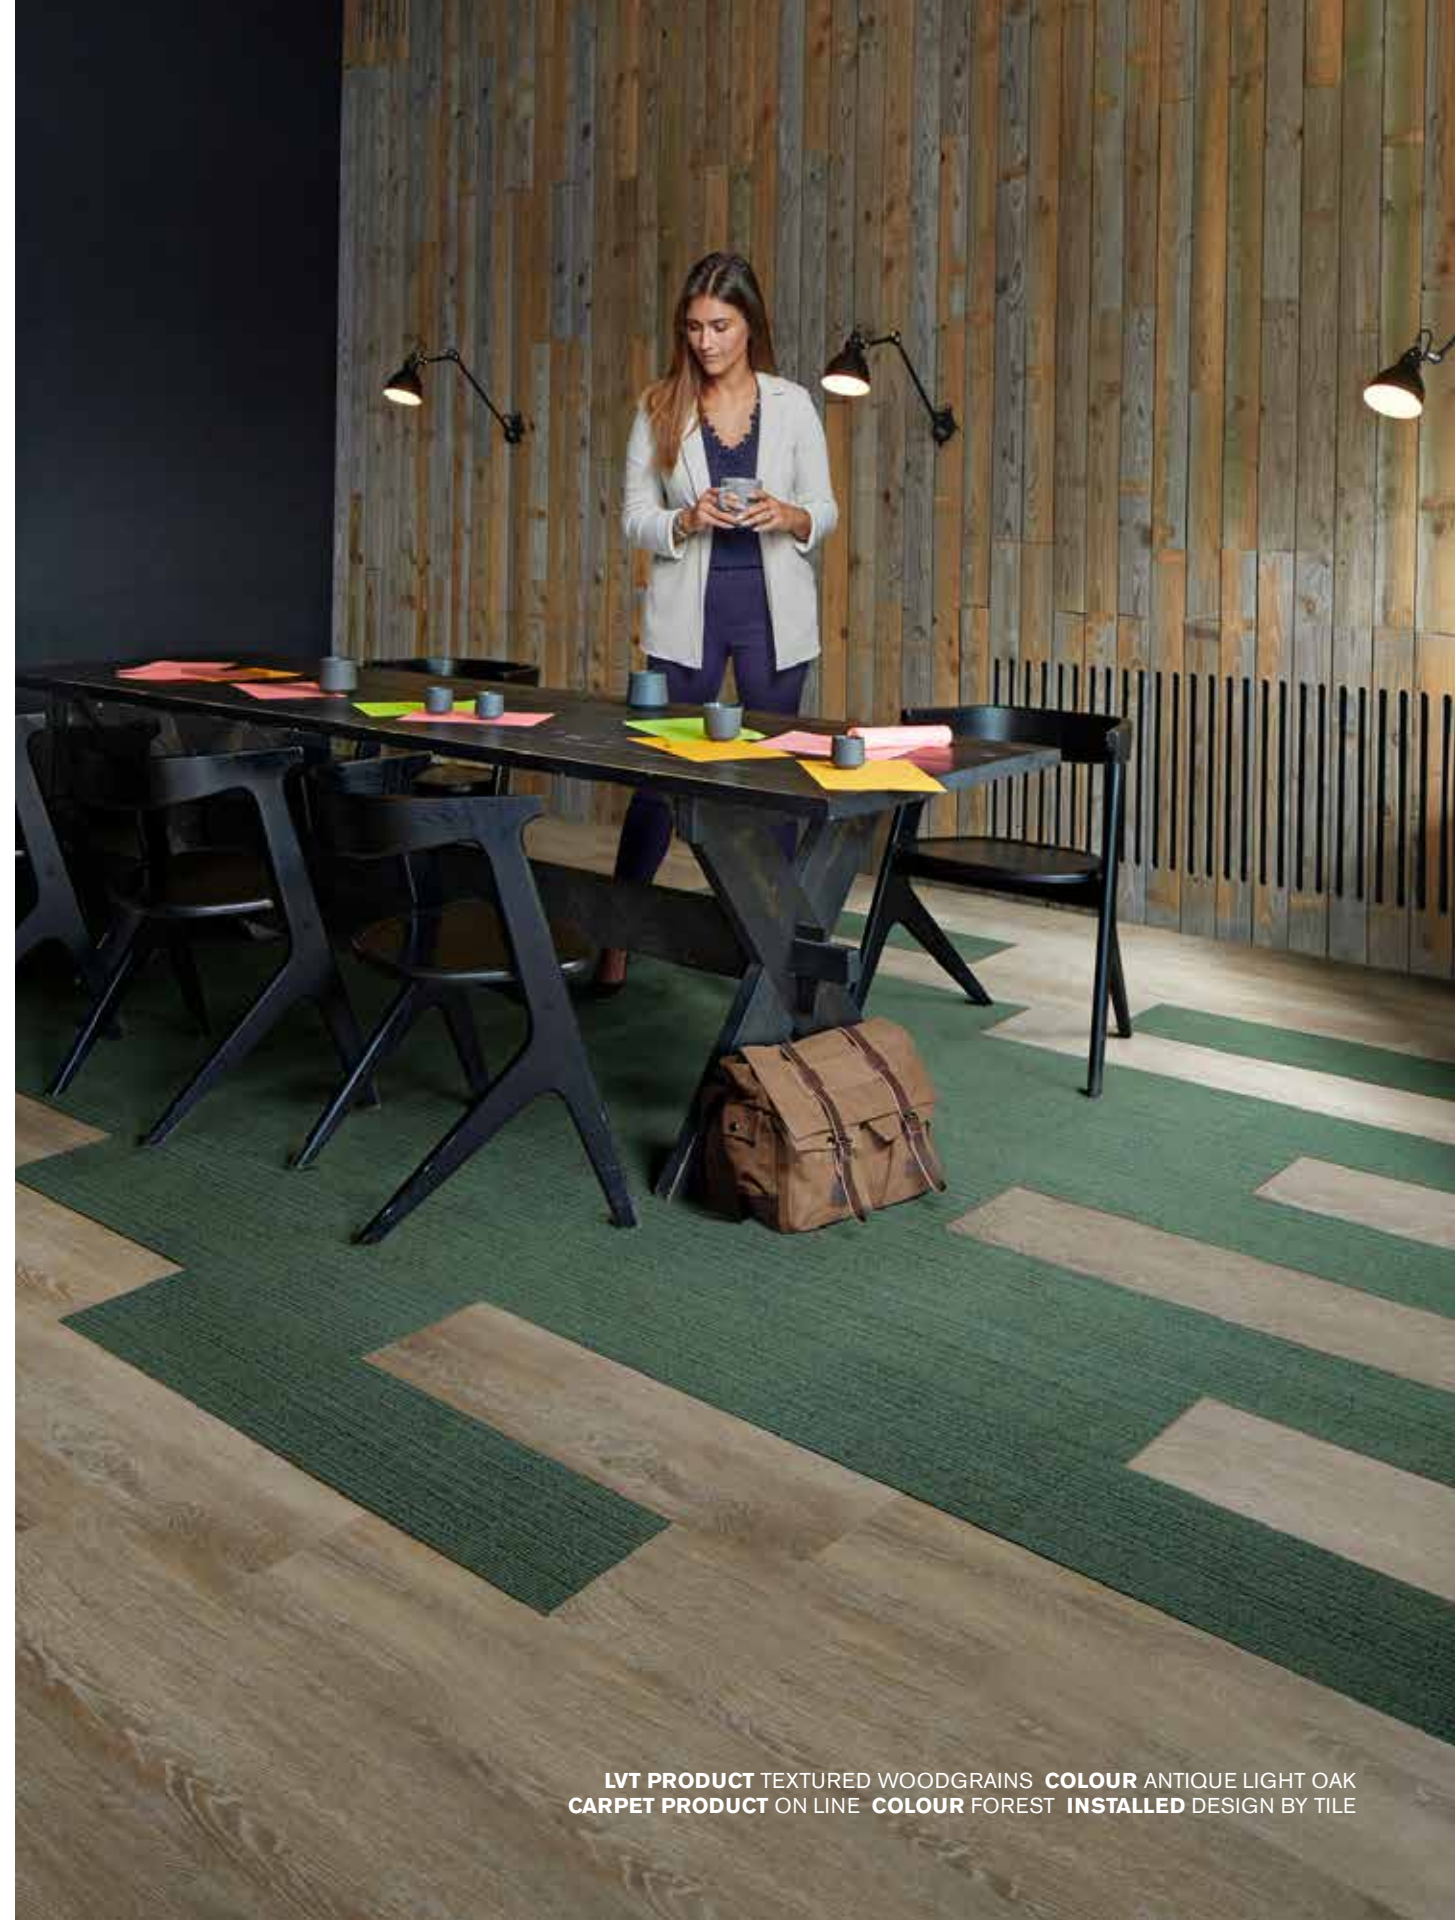



**PRODUCT** TEXTURED STONES **COLOUR** DARK CONCRETE  
**INSTALLED** NON DIRECTIONAL



**LVT PRODUCT** NATURAL WOODGRAINS **COLOUR** WINTER GREY  
**CARPET PRODUCT** WORLD WOVEN | WW895 **COLOUR** FUCHSIA WEAVE **INSTALLED** ASHLAR



**PRODUCT** TEXTURED WOODGRAINS **COLOUR** ANTIQUE OAK  
**INSTALLED** HERRINGBONE



**PRODUCT** NATURAL WOODGRAINS **COLOUR** BAMBOO  
**INSTALLED** DESIGN BY TILE



**LVT PRODUCT** NATURAL WOODGRAINS **COLOUR** BEECH **INSTALLED** ASHLAR  
**CARPET PRODUCT** URBAN RETREAT | UR102 **COLOUR** GRANITE **INSTALLED** NON DIRECTIONAL



**PRODUCT** TEXTURED STONES **COLOUR** DISTRESSED CONCRETE  
**INSTALLED** NON DIRECTIONAL




**PRODUCT** TEXTURED WOODGRAINS **COLOUR** SILVER DUNE  
**INSTALLED** HERRINGBONE



**PRODUCT** TEXTURED WOODGRAINS **COLOUR** RUSTIC OAK  
**INSTALLED** ASHLAR




**PRODUCT** TEXTURED STONES **COLOUR** LIGHT CONCRETE  
**INSTALLED** NON DIRECTIONAL

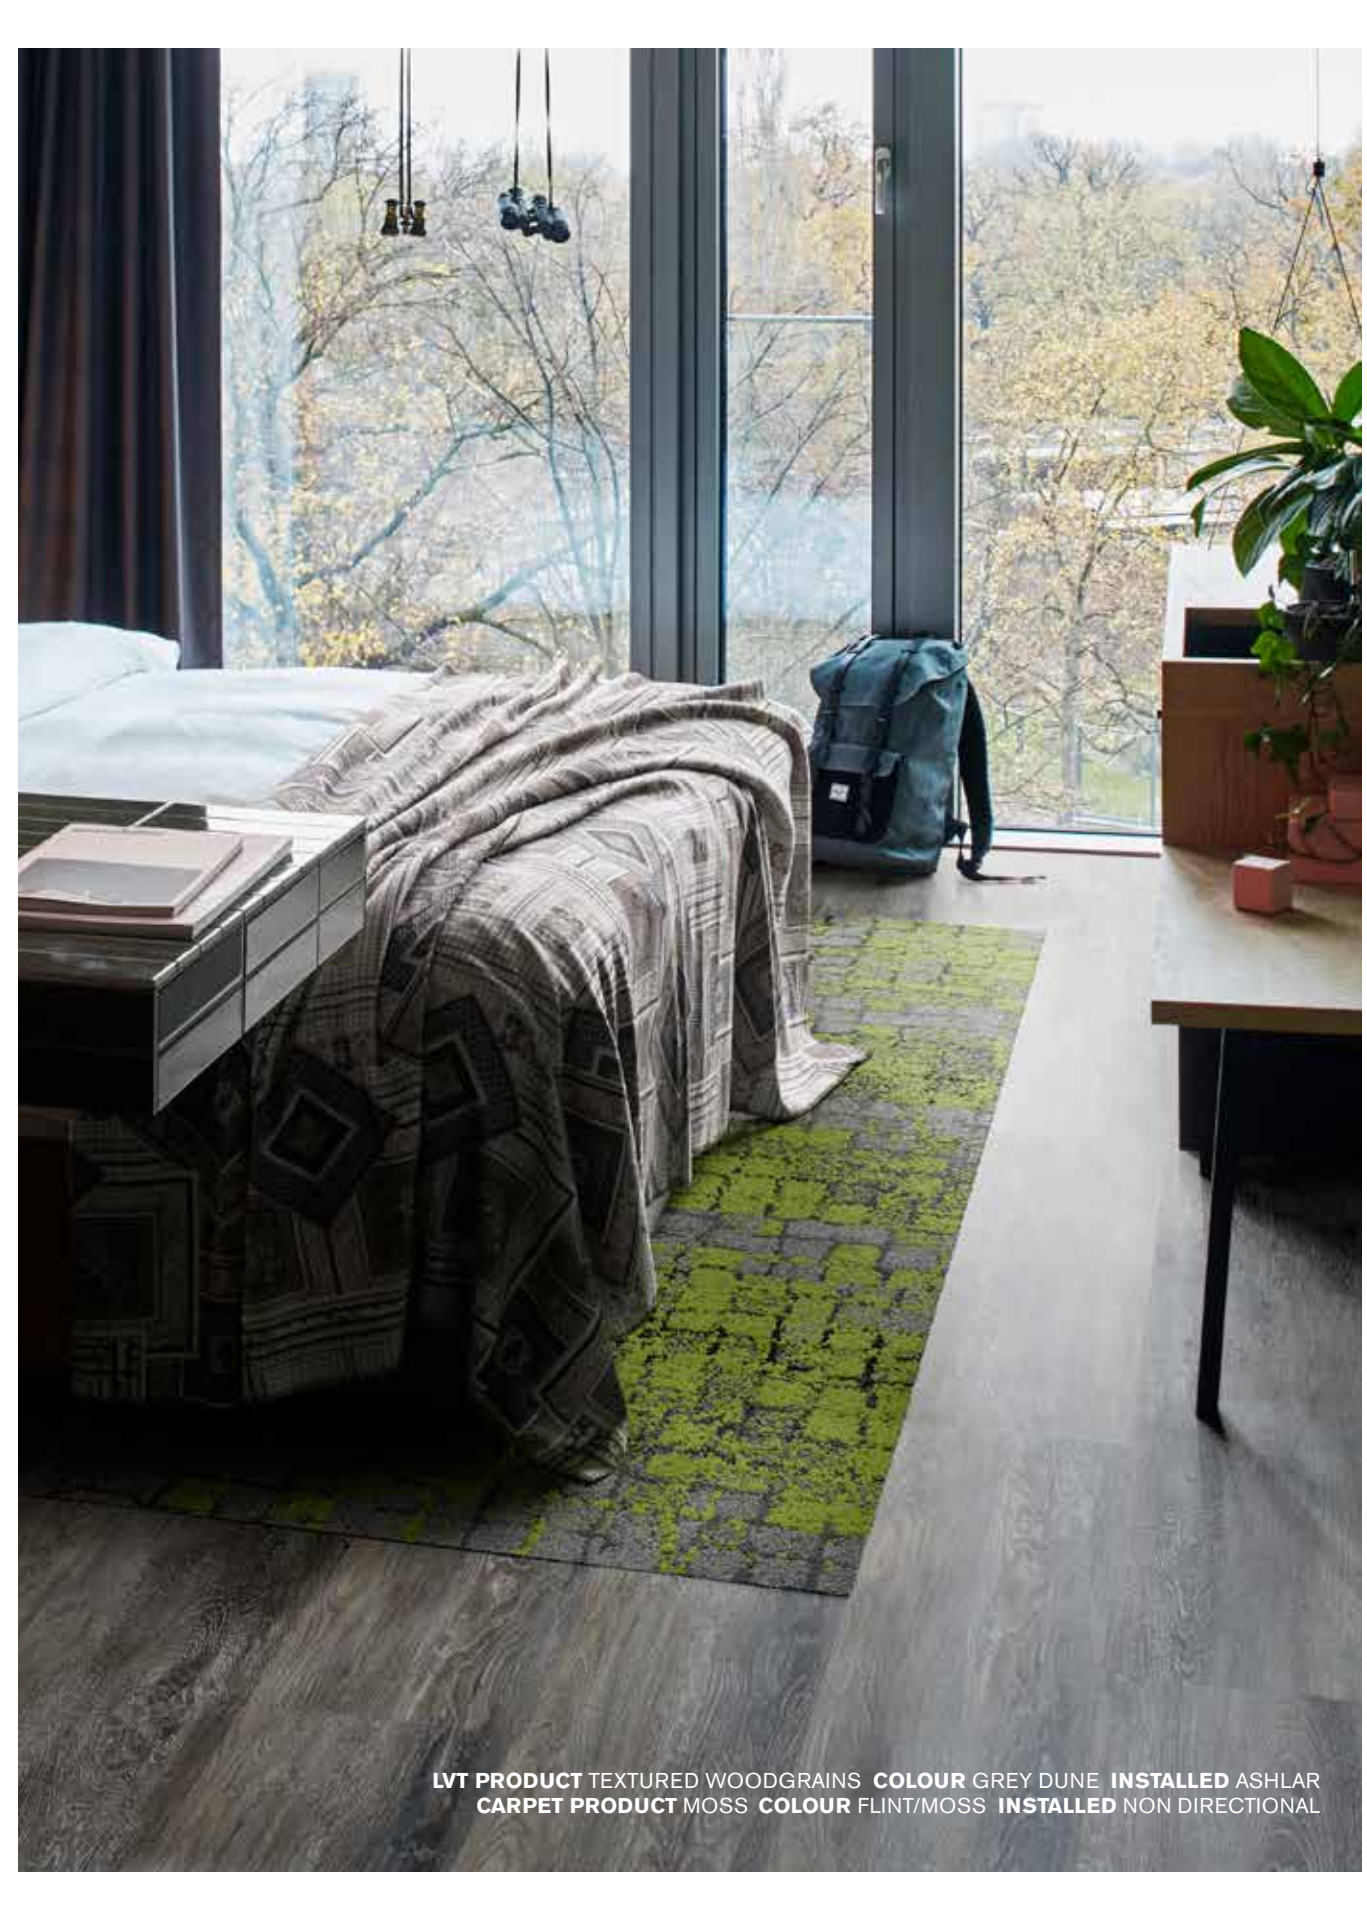

**LVT PRODUCT** TEXTURED WOODGRAINS **COLOUR** GREY DUNE **INSTALLED** ASHLAR  
**CARPET PRODUCT** MOSS **COLOUR** FLINT/MOSS **INSTALLED** NON DIRECTIONAL



**PRODUCT** TEXTURED WOODGRAINS **COLOUR** RUSTIC HICKORY  
**INSTALLED** ASHLAR

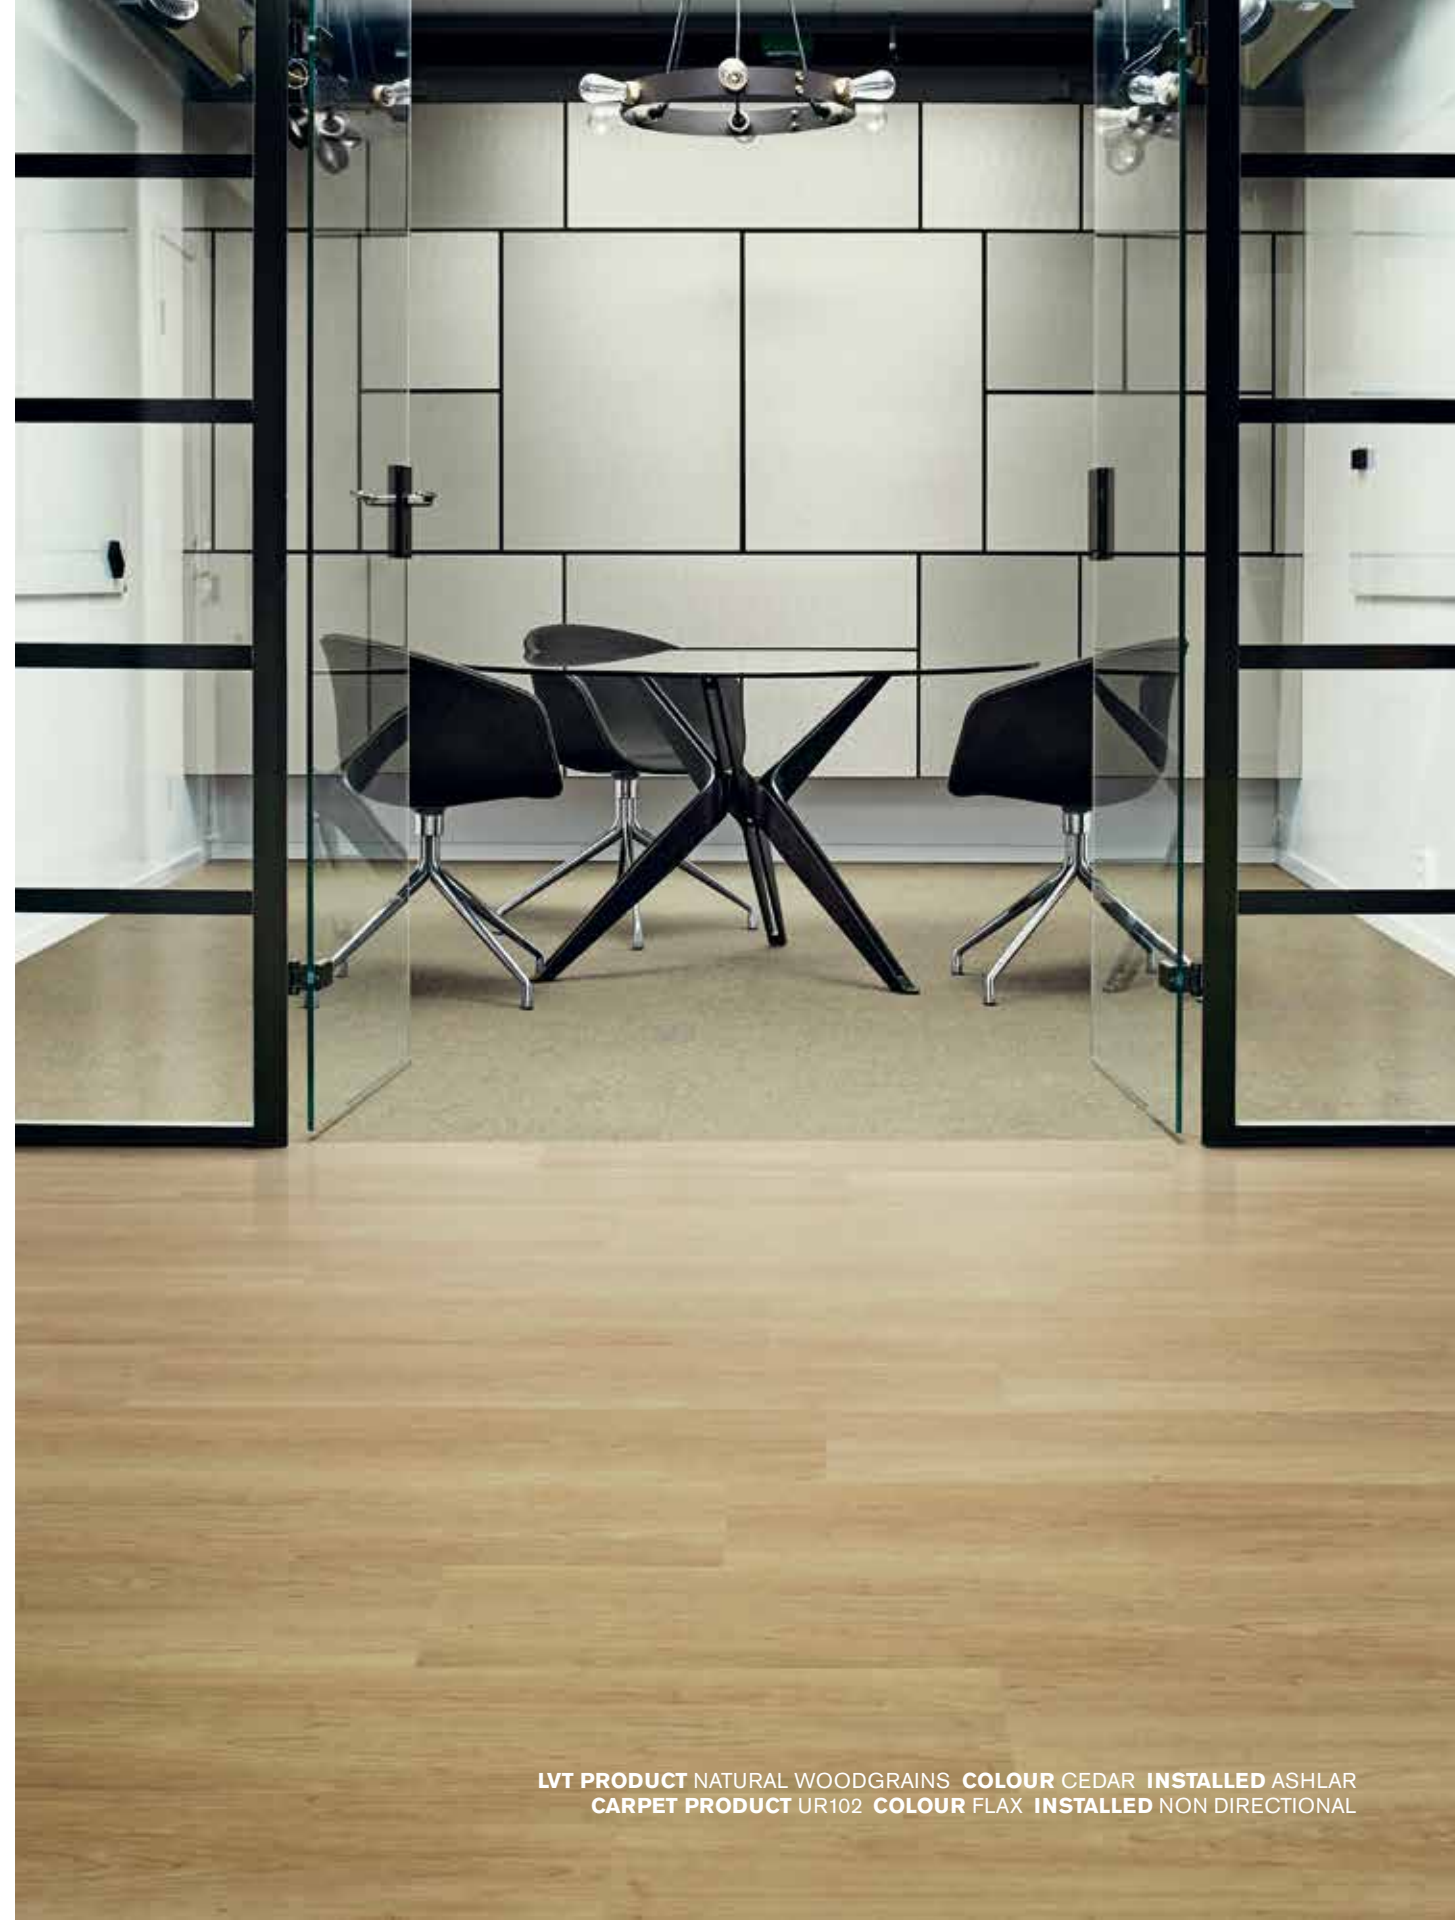

**LVT PRODUCT** NATURAL WOODGRAINS **COLOUR** CEDAR **INSTALLED** ASHLAR  
**CARPET PRODUCT** UR102 **COLOUR** FLAX **INSTALLED** NON DIRECTIONAL





LVT PRODUCT NATURAL WOODGRAINS COLOUR STORM  
CARPET PRODUCT MOD CAFÉ COLOUR STAR LINEN INSTALLED ASHLAR



**LVT PRODUCT** TEXTURED STONES **COLOUR** MEDIUM CONCRETE **INSTALLED** MONOLITHIC  
**CARPET PRODUCT** HARD DRIVE **COLOUR** PEWTER HD **INSTALLED** ASHLAR



**LVT PRODUCT** TEXTURED STONES **COLOUR** EMPERADOR GRAY  
**CARPET PRODUCT** STONE COURSE **COLOUR** RED/STONE  
**CARPET PRODUCT** RUE **COLOUR** RED **INSTALLED** NON DIRECTIONAL




**LVT PRODUCT** TEXTURED STONES **COLOUR** COOL POLISHED CEMENT  
**CARPET PRODUCT** COMPOSURE **COLOUR** SECLUSION **INSTALLED** NON DIRECTIONAL



**LVT PRODUCT** NATURAL WOODGRAINS **COLOUR** TEAK  
**CARPET PRODUCT** EM552 **COLOUR** COBBLESTONE AVE **INSTALLED** ASHLAR



**PRODUCT** TEXTURED WOODGRAINS **COLOUR** WHITE WASH  
**INSTALLED** HERRINGBONE



Install next to  
carpet tile **without**  
transition strips.

LVT PRODUCT NATURAL WOODGRAINS COLOUR STORM  
CARPET PRODUCT WW895 COLOUR HEATHER WEAVE

## Integrated System.

*Say goodbye to transition strips and doubling up.* Our modular resilient floorings are made to work as a system with our modular carpet tile. The compatible size and height of our products allows you to integrate modular carpet for an inset rug or an adjacent field – no transition strip required. You'll avoid doubling up on materials and save cost.

## Real Flexibility.

*Create a unique look that lasts.* Interface modular resilient LVT makes it easy to extend the life of your floor. From simple maintenance like damp mopping to selectively replacing damaged tiles, your flooring investment will stand the test of time - beautifully and effortlessly.

## Circular System.

*Keep flooring out of the landfill.* Our modular resilient LVT is produced with a controlled material stream so it can be reclaimed and recycled into our GlasBac™RE recycled content backing through our ReEntry® program.

## Noise Reduction.

*Less distractions.* With our LVT with Sound Choice™ backing. Offering you best-in-class performance for reduced impact sound and floor to floor sound transmission.

## Why Our Modular Resilient LVT?



### High Performance from Top to Bottom.

1. *Ceramor® Coating.* Minimizes everyday scratching and scuffing. *Ceramor+® Coating.* Also provides enhanced slip resistance.
2. *Wear Layer.* High quality layer enabling 15 years of resilience and performance.
3. *Print Film.* Provides outstanding visuals of natural materials and Interface innovative designs.
- 4a 4b. *Core Sheet.* Creates thickness for a stronger core and reduces telegraphing from beneath.
5. *Fiberglass.* Adds dimensional stability and controlled flexibility.
6. *Sound Choice™.* Provides comfort and superior acoustic performance.

### Third Party Certification.

*Carbon Neutral Floors.* All Interface flooring sold globally is third party verified carbon neutral. We've taken a holistic approach to achieve carbon neutrality, first through reducing the carbon footprint of our products and then using carbon offsets for the remainder.

*Environmental Product Declaration (EPD).* Interface LVT products are covered by an EPD. An EPD provides a comprehensive statement of product ingredients and environmental impacts based upon life cycle assessment performed to ISO standards.

*Global GreenTag.* A product rating system recognised by the Green Building Council of Australia, New Zealand and South Africa. It has been set up to meet the criteria of the Green Star® "Sustainable Products" credits. All Interface products are certified "Level A".

*Lloyd's Register.* A comprehensive standard for better PVC developed by the Green Building Council of Australia under its Green Star programme. Interface holds Lloyd's Statement of Compliance (Green Building Council of Australia Best Practice Guidelines 2013) for Best Practice PVC for all products made in Australia.


*Indoor Air Quality.* All Interface modular flooring products meet the highest standards for indoor air quality. Interface LVT is FloorScore® Certified, assuring very low emissions of VOCs.



Carbon Neutral Floors™



## Level Set | Stones Colour Range



TEXTURED STONES  
A00308 LIGHT CONCRETE



TEXTURED STONES  
A00311 DISTRESSED  
CONCRETE



TEXTURED STONES  
A00309 MEDIUM CONCRETE



TEXTURED STONES  
A00310 DARK CONCRETE



NATURAL STONES  
A00107 TRAVERTINE



TEXTURED STONES  
A00302 COOL POLISHED  
CEMENT



TEXTURED STONES  
A00304 EMPERADOR GRAY



NATURAL STONES  
A00104 WARM IMPALA  
MARBLE



NATURAL STONES  
A00102 MARONE DARK  
MARBLE



NATURAL STONES  
A00103 COOL IMPALA  
MARBLE

Level Set | Woodgrains Colour Range

---



TEXTURED WOODGRAINS  
A00407 WHITE WASH



TEXTURED WOODGRAINS  
A00427 HEMLOCK



TEXTURED WOODGRAINS  
A00422 RUSTIC HICKORY



TEXTURED WOODGRAINS  
A00405 GREY DUNE



NATURAL WOODGRAINS  
A00208 SAND DUNE



TEXTURED WOODGRAINS  
A00426 SUGARPINE



TEXTURED WOODGRAINS  
A00421 RUSTIC OAK



TEXTURED WOODGRAINS  
A00404 DISTRESSED BLACK WALNUT



TEXTURED WOODGRAINS  
A00406 ANTIQUE LIGHT OAK



NATURAL WOODGRAINS  
A00214 BAMBOO



TEXTURED WOODGRAINS  
A00420 RUSTIC CASHEW



NATURAL WOODGRAINS  
A00205 STORM



TEXTURED WOODGRAINS  
A00419 ANTIQUE ASH OAK



NATURAL WOODGRAINS  
A00212 CEDAR



NATURAL WOODGRAINS  
A00207 WASHED WHEAT



TEXTURED WOODGRAINS  
A00415 ANTIQUE OAK



NATURAL WOODGRAINS  
A00210 TEAK



NATURAL WOODGRAINS  
A00206 WINTER GREY



NATURAL WOODGRAINS  
A00211 WASHED MAPLE



NATURAL WOODGRAINS  
A00204 BEECH



TEXTURED WOODGRAINS  
A00417 SILVER DUNE

## Specifications

### Level Set | Woodgrains

Product Name / Number	Textured Woodgrains - A004 Natural Woodgrains - A002
Product Construction	High Performance Luxury Vinyl Tile
Wear Layer Thickness	0.55 mm
Total Thickness (Metric)	4.5 mm
Classification	EN 651 Class 33 (heavy contract) EN 651 Class 42 (light industrial general)
Acoustic Impact Noise Reduction Finish	ISO 140.8 ΔLw = 16dB Asia - CERAMOR™ UV Stabilized Ceramic Bead Coating ANZ - CERAMOR+™ UV Stabilized Ceramic Bead Coating
Nominal Dimensions	25cm x 100cm

#### Performance Specifications


Critical Heat Flux	AS ISO 9239-1	>7kW/m <sup>2</sup>
Smoke Rate	AS ISO 9239-1	<750%.min
Size, Tolerance	ISO 24342	>400 mm < 0.35 mm
	ISO 24342	<400 mm < 0.25 mm
Dimensional Stability	ISO 23999	<0.25%
Thickness	ISO 24346	Average value + 0.20mm
Resistance to Light	ISO 105-B02	≥6
Resistance to Heat	ASTM F1514	ΔE< 8 avg Max
Resistance to Chemicals	EN-ISO 26987	Pass
Reaction to Fire	EN ISO 13501-1	Class BFI-S1
VOC Test	ISO 10580	Pass
Flexibility	ISO 24344 Method A	Pass
Static Load	ASTM F970	≤0.005" with 1500 psi
Castor chair	ISO 4918	Pass
Thermal Conductivity	EN 12667	0.16 W/mK
Static Electrical	EN 1815	<2kV
Slip Resistance	AS 4586-2013	P3 / R10

#### Environmental Specifications

Total Recycled Content	39%
Carbon Footprint / m <sup>2</sup> (Cradle to Gate)*	9.2 kg CO <sub>2</sub>
Sustainability Assessment	NSF/ANSI 332, Meets Certification Guidelines
LEED v4	Contributes to IEQ: Low Emitting Materials; M&R: EPD and EPR
Global Green Tag	Green Rate Level A
End of Life	Fully Recyclable to carpet tile Backing Recycling

#### Technical Information

Installation	See Interface LVT Installation Guidelines online
Maintenance	See Interface LVT Maintenance Guidelines online
Reclamation	Recyclable through ReEntry®
Warranty	15 Year Standard LVT Product Warranty
Installation Method	Ashlar, Herringbone



Production specifications are subject to normal manufacturing tolerances and may be changed without notice. Slight variation in colour among different production lots are normal and should be considered in the overall installation plan. Products covered by manufacturer's written warranty only. All other warranties, including without limitation any implied warranties of merchantability of fitness for particular purpose, are hereby disclaimed. Contact your representative for written warranty information.

\* Please see [interface.com](http://interface.com) for the most up to date numbers from our EPD.

## Specifications

### Level Set | Stones

Product Name / Number	Textured Stones - A003 Natural Stones - A001
Product Construction	High Performance Luxury Vinyl Tile
Wear Layer Thickness	0.55 mm
Total Thickness (Metric)	4.5 mm
Classification	EN 651 Class 33 (heavy contract) EN 651 Class 42 (light industrial general)
Acoustic Impact Noise Reduction Finish	ISO 140.8 ΔLw = 16dB Asia - CERAMOR™ UV Stabilized Ceramic Bead Coating ANZ - CERAMOR+™ UV Stabilized Ceramic Bead Coating
Nominal Dimensions	50cm x 50cm

#### Performance Specifications


Critical Heat Flux	AS ISO 9239-1	>7kW/m <sup>2</sup>
Smoke Rate	AS ISO 9239-1	<750%.min
Size, Tolerance	ISO 24342	>400 mm < 0.35 mm
	ISO 24342	<400 mm < 0.25 mm
Dimensional Stability	ISO 23999	<0.25%
Thickness	ISO 24346	Average value + 0.20mm
Resistance to Light	ISO 105-B02	≥6
Resistance to Heat	ASTM F1514	ΔE< 8 avg Max
Resistance to Chemicals	EN-ISO 26987	Pass
Reaction to Fire	EN ISO 13501-1	Class BFI-S1
VOC Test	ISO 10580	Pass
Flexibility	ISO 24344 Method A	Pass
Static Load	ASTM F970	≤0.005" with 1500 psi
Castor chair	ISO 4918	Pass
Thermal Conductivity	EN 12667	0.16 W/mK
Static Electrical	EN 1815	<2kV
Slip Resistance	AS 4586-2013	P3 / R10

#### Environmental Specifications

Total Recycled Content	39%
Carbon Footprint / m <sup>2</sup> (Cradle to Gate)*	9.2 kg CO <sub>2</sub>
Sustainability Assessment	NSF/ANSI 332, Meets Certification Guidelines
LEED v4	Contributes to IEQ: Low Emitting Materials; M&R: EPD and EPR
Global Green Tag	Green Rate Level A
End of Life	Fully Recyclable to carpet tile Backing Recycling

#### Technical Information

Installation	See Interface LVT Installation Guidelines online
Maintenance	See Interface LVT Maintenance Guidelines online
Reclamation	Recyclable through ReEntry®
Warranty	15 Year Standard LVT Product Warranty
Installation Method	Monolithic, Ashlar, Brick, Non Directional, Quarter-Turn



Production specifications are subject to normal manufacturing tolerances and may be changed without notice. Slight variation in colour among different production lots are normal and should be considered in the overall installation plan. Products covered by manufacturer's written warranty only. All other warranties, including without limitation any implied warranties of merchantability of fitness for particular purpose, are hereby disclaimed. Contact your representative for written warranty information.

\* Please see [interface.com](http://interface.com) for the most up to date numbers from our EPD.





## Carbon Neutral Floors™

[www.interface.com](http://www.interface.com)

### Australia

Interface Australia  
local toll free: 1800 804 361

### India

Interface India  
tel: +91 80 4613 1313

### South East Asia

Interface Asia  
tel: +65 6478 1510

### South Korea

Interface South Korea  
tel: +82 2 555 1734

### Japan

Interface Japan  
tel: +81 3 5733 5211

### Beijing

Interface China  
tel: +86 10 6590 7810

### Hong Kong

Interface China  
tel: +852 2802 0838

### Shanghai

Interface China  
tel: +86 21 6340 3868

