



Level Set | **LVT** Stones & Woodgrains

Natural Woodgrains
Textured Woodgrains
Textured Stones

Interface®

Discover the perfect harmony of form and function

With thoughtful consideration for design, performance and a sustainable path, we've crafted the Level Set™ Collection as a foundational set of luxury vinyl tiles (LVT) that integrate effortlessly with Interface flooring systems. Whether you choose to showcase the natural elegance of LVT alone or combine it with our modular carpet tiles, the result is a cohesive masterpiece that transcends conventional design.

Our LVT selections bring together the natural elegance of textured woodgrains and creative stones. Move seamlessly between LVT and carpet tiles to create an integrated floor or inset rug, without transition strips.

Interface LVT is built to last with highly durable, recyclable layers. Scuffs and scratches from everyday wear are kept at bay by **Ceramor+™**, a ceramic bead coating that not only protects the surface layer of the tile but also enhances slip resistance. The high-performance backing layer, **Sound Choice™** mirrors the noise-reducing qualities of our carpet tiles, ensuring exceptional acoustic properties. All these features are underlined by a robust 15-year product warranty, with a commitment to sustainability evident in its 39% recycled content.

Indulge in the best of both worlds by pairing LVT with our modular carpet tiles, and say hello to seamless, captivating style.







LVT PRODUCT LEVEL SET TEXTURED STONES **COLOUR** COOL POLISHED CEMENT **INSTALLED** MONOLITHIC
CARPET PRODUCT COMPOSURE **COLOUR** SECLUSION **INSTALLED** NON DIRECTIONAL



LVT PRODUCT LEVEL SET NATURAL WOODGRAINS **COLOUR** BEECH **INSTALLED** ASHLAR
CARPET PRODUCT ON LINE **COLOUR** BISCUIT **INSTALLED** ASHLAR



PRODUCT LEVEL SET TEXTURED STONES **COLOUR** DISTRESSED CONCRETE **INSTALLED** MONOLITHIC








Level Set | Natural Woodgrains Colour Range



A00201 BLACK WALNUT

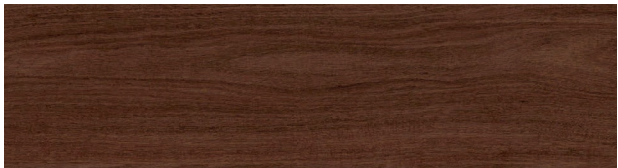


A00202 MADAGASCAR




A00203 CHESTNUT



A00204 BEECH

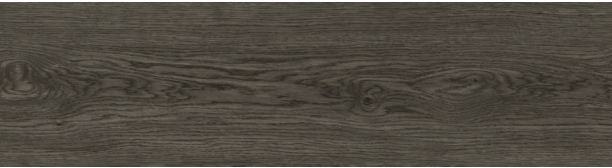

A00205 STORM

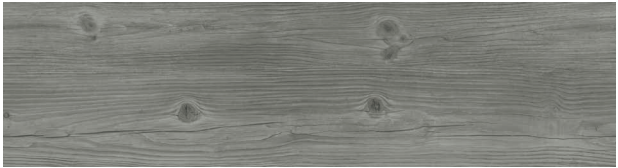

A00206 WINTER GREY



A00208 SAND DUNE



A00211 WASHED MAPLE



A00212 CEDAR



PRODUCT LEVEL SET TEXTURED WOODGRAINS **COLOUR** SILVER DUNE **INSTALLED** HERRINGBONE

Level Set | Textured Woodgrains Colour Range



A00401 DISTRESSED WALNUT



A00403 DISTRESSED HICKORY



A00405 GREY DUNE



A00406 ANTIQUE LIGHT OAK



A00407 WHITE WASH



A00409 ASH WALNUT



A00414 ANTIQUE MAPLE



A00415 ANTIQUE OAK



A00416 ANTIQUE DARK OAK



A00417 SILVER DUNE



A00418 CHARCOAL DUNE



A00419 ANTIQUE ASH OAK



Level Set | Textured Stones Colour Range



A00301 POLISHED CEMENT



A00302 COOL POLISHED CEMENT



A00308 LIGHT CONCRETE



A00309 MEDIUM CONCRETE



A00310 DARK CONCRETE



A00311 DISTRESSED CONCRETE

Specifications

Level Set | Woodgrains

Product Name / Number	Textured Woodgrains - A004 Natural Woodgrains - A002
Product Construction	High Performance Luxury Vinyl Tile
Wear Layer Thickness	0.55 mm
Total Thickness (Metric)	4.5 mm
Classification	EN 651 Class 33 (heavy contract) EN 651 Class 42 (light industrial general)
Acoustic Impact Noise Reduction	ISO 10140-3 ΔL _w = 16dB
Finish	CERAMOR+™ UV Stabilized Ceramic Bead Coating
Nominal Dimensions	25cm x 100cm

Performance Specifications

Critical Heat Flux	AS ISO 9239-1	>7kW/m²
Smoke Rate	AS ISO 9239-1	<750%.min
Size, Tolerance	ISO 24342	>400 mm < 0.35 mm
	ISO 24342	<400 mm < 0.25 mm
Dimensional Stability	ISO 23999	<0.25%
Thickness	ISO 24346	Average value + 0.20mm
Resistance to Light	ISO 105-B02	≥6
Resistance to Heat	ASTM F1514	ΔE< 8 avg Max
Resistance to Chemicals	EN-ISO 26987	Pass
Reaction to Fire	EN ISO 13501-1	Class BFL-S1
VOC Test	ISO 10580	Pass
Flexibility	ISO 24344 Method A	Pass
Static Load	ASTM F970	≤0.005" with 1500 psi
Castor chair	ISO 4918	Pass
Thermal Conductivity	EN 12667	0.16 W/mK
Static Electrical	EN 1815	<2kV
Slip Resistance	AS 4586-2013	P3 / R10

Environmental Specifications

Total Recycled Content	39%
Carbon Footprint / m² (Cradle to Gate)*	9.2 kg CO ₂
Sustainability Assessment	NSF/ANSI 332, Meets Certification Guidelines
LEED v4	Contributes to IEQ: Low Emitting Materials; M&R: EPD and EPR
Global Green Tag	Green Rate Level A

Technical Information

Installation	See Interface LVT Installation Guidelines online
Maintenance	See Interface LVT Maintenance Guidelines online®
Warranty	15 Year Standard LVT Product Warranty
Installation Method	Ashlar, Herringbone



Level Set | Stones

Product Name / Number	Textured Stones - A003
Product Construction	High Performance Luxury Vinyl Tile
Wear Layer Thickness	0.55 mm
Total Thickness (Metric)	4.5 mm
Classification	EN 651 Class 33 (heavy contract) EN 651 Class 42 (light industrial general)
Acoustic Impact Noise Reduction	ISO 10140-3 ΔL _w = 16dB
Finish	CERAMOR+™ UV Stabilized Ceramic Bead Coating
Nominal Dimensions	50cm x 50cm

Performance Specifications


Critical Heat Flux	AS ISO 9239-1	>7kW/m²
Smoke Rate	AS ISO 9239-1	<750%.min
Size, Tolerance	ISO 24342	>400 mm < 0.35 mm
	ISO 24342	<400 mm < 0.25 mm
Dimensional Stability	ISO 23999	<0.25%
Thickness	ISO 24346	Average value + 0.20mm
Resistance to Light	ISO 105-B02	≥6
Resistance to Heat	ASTM F1514	ΔE< 8 avg Max
Resistance to Chemicals	EN-ISO 26987	Pass
Reaction to Fire	EN ISO 13501-1	Class BFL-S1
VOC Test	ISO 10580	Pass
Flexibility	ISO 24344 Method A	Pass
Static Load	ASTM F970	≤0.005" with 1500 psi
Castor chair	ISO 4918	Pass
Thermal Conductivity	EN 12667	0.16 W/mK
Static Electrical	EN 1815	<2kV
Slip Resistance	AS 4586-2013	P3 / R10

Environmental Specifications

Total Recycled Content	39%
Carbon Footprint / m² (Cradle to Gate)*	9.2 kg CO ₂
Sustainability Assessment	NSF/ANSI 332, Meets Certification Guidelines
LEED v4	Contributes to IEQ: Low Emitting Materials; M&R: EPD and EPR
Global Green Tag	Green Rate Level A

Technical Information

Installation	See Interface LVT Installation Guidelines online
Maintenance	See Interface LVT Maintenance Guidelines online
Warranty	15 Year Standard LVT Product Warranty
Installation Method	Ashlar, Brick, Monolithic, Non Directional, Quarter-Turn



* Please refer to interface.com for the latest figures from our EPD.

Why Our Modular Resilient Sound Choice™ LVT?



Integrated System
Say goodbye to transition strips and doubling up. Our modular resilient floorings are made to work as a system with our modular carpet tile. The compatible size and height of our products allow you to integrate modular carpet for an inset rug or an adjacent field – no transition strip required. You'll avoid doubling up on materials and save cost.




Easy Maintenance
Create a unique look that lasts. Interface Sound Choice LVT extends the life of your floor. From simple maintenance like damp mopping to selectively replacing damaged tiles, your flooring investment will stand the test of time - beautifully and effortlessly.




Noise Reduction
Less distractions. Sound Choice is a specially formulated backing for superior noise reduction, offering high levels of impact sound reduction.

High Performance from Top to Bottom

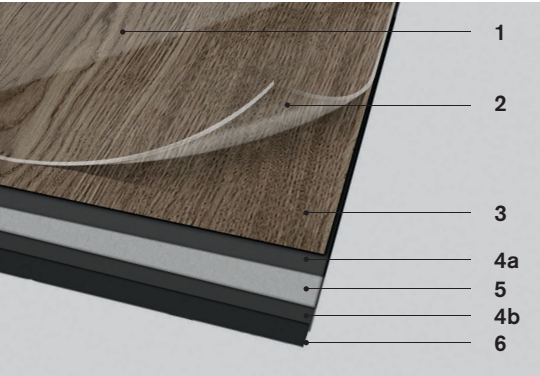

- 1. Ceramor™+ Coating.** Minimizes everyday scratching and scuffing and also provides enhanced slip resistance.
- 2. Wear Layer.** High quality layer enabling 15 years of resilience and performance.
- 3. Print Film.** Provides outstanding visuals of natural materials and Interface innovative designs.
- 4. Core Sheet.** Creates thickness for a stronger core and reduces telegraphing from beneath.
- 5. Fiberglass.** Adds dimensional stability and controlled flexibility.
- 7. Sound Choice™ Backing.** Provides comfort and superior acoustic performance.

Interface Sound Choice LVT and carpet tile allow you to seamlessly move from hard to soft surfaces. No transition strip needed.

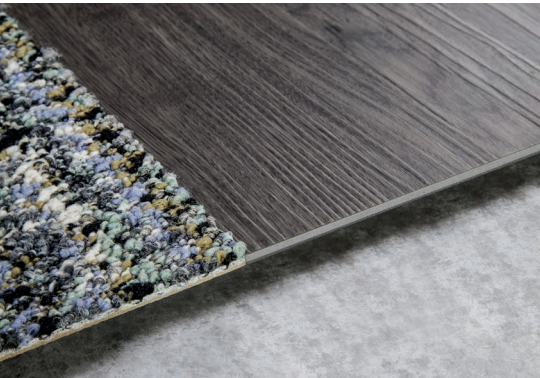

Environmental Product Declaration (EPD)
Interface LVT products are covered by an EPD. An EPD provides a comprehensive statement of product ingredients and environmental impacts based upon life cycle assessment performed to ISO standards.



GREENGUARD Gold & FloorScore®
Meeting the highest standards for indoor air quality and assuring very low emissions of VOCs, Interface LVT is GREENGUARD Gold and FloorScore® Certified and CDPH 01350 compliant.



NSF/ANSI 332 Silver
This standard evaluates the environmental impact of resilient floor covering for its entire life cycle.



Global GreenTag GreenRate - Level A
Global GreenTag's GreenRate certification is a product rating system recognised by the Green Building Council of Australia and Green Building Council of New Zealand. Its assessment scheme aligns to the Green Star® Responsible Products program. All Interface products are certified "Level A".



Best Practice Guidelines for PVC
Our product proudly holds the Best Environmental Practice (BEP) PVC certification, a recognition of compliance with stringent environmental and social criteria in PVC manufacturing. This certification is a key contributor to Green Star certification, aligning with the GBCA's Responsible Products Framework. Our commitment to BEP guidelines demonstrates our dedication to environmental responsibility and product excellence.

Do more on [interface.com](https://www.interface.com)

- Browse products, save and share favourites
- See images of products in a variety of room scenes
- Browse floor designs, change colours, upload your own image, download and share
- Get full specifications, sustainability certifications and more
- Sign up to get the latest information on Interface products and news

Our EPDs and certifications contribute credits towards Green Building Council's Green Star® Responsible Products program.

Green Star is the Green Building Council of Australia's sustainability rating system for the built environment. It is used to rate new and existing buildings, new fit-outs, and new precinct developments. The Green Building Council of Australia recognises Responsible Products that may contribute to a Green Star rating through its Responsible Credits.

We have tried our very best to accurately represent product colours. However, due to the nature of printed materials, colour of actual products may vary slightly. Please request a sample to see actual product colour.

Production specifications are subject to normal manufacturing tolerances and may be changed without notice. Slight variation in colour among different production lots are normal and should be considered in the overall installation plan. Products covered by manufacturer's written warranty only. All other warranties, including without limitation any implied warranties of merchantability of fitness for particular purpose, are hereby disclaimed. Contact your representative for written warranty information.

www.interface.com

Australia

Interface Australia

local toll free: 1800 804 361

India

Interface India

tel: +91 76249 17934

South East Asia

Interface Asia

tel: +65 6478 1510

South Korea

Interface South Korea

tel: +82 2 555 1734

Japan

Interface Japan

tel: +81(0)3-6892-5513

Beijing

Interface China

tel: +86 10 6590 7810

Hong Kong

Interface China

tel: +852 2802 0838

Shanghai

Interface China

tel: +86 21 6340 3868