

Look Both Ways Collection | LVT



Interface®

Monolithic textures denoting gravity and substance live with light-hearted colour and confetti. Unexpected combinations of materials inspire creative outcomes. Celebrate the mix!

Look Both Ways is a collection of carpet tile and LVT patterns combining Zen-like purity with playfulness. Marrying purpose and function with your intention, these styles create landscapes that perform and delight in infinite ways.


Walk of Life™, the bedrock of the LVT collection, is gritty, not polished. Sharing the same urban grey palette, Walk the Aisle™ sparkles with a luminescent fleck that energizes the surface. Walk About™ appears carved in ways that conjure pattern-love from the 1920s, 1980s, and today. And finally Walk on By™ is a vision of pure joy in brights & neutrals. Step, walk or run, but definitely look both ways for design inspiration.

Carbon Neutral Floors™ Like all of our products, globally, Look Both Ways is carbon neutral. Join us in creating a climate fit for life. **#ClimateTakeBack**





PRODUCT WALK OF LIFE COLOUR CHARCOAL
PRODUCT WALK ON BY COLOUR MONOCHROME INSTALLED NON DIRECTIONAL

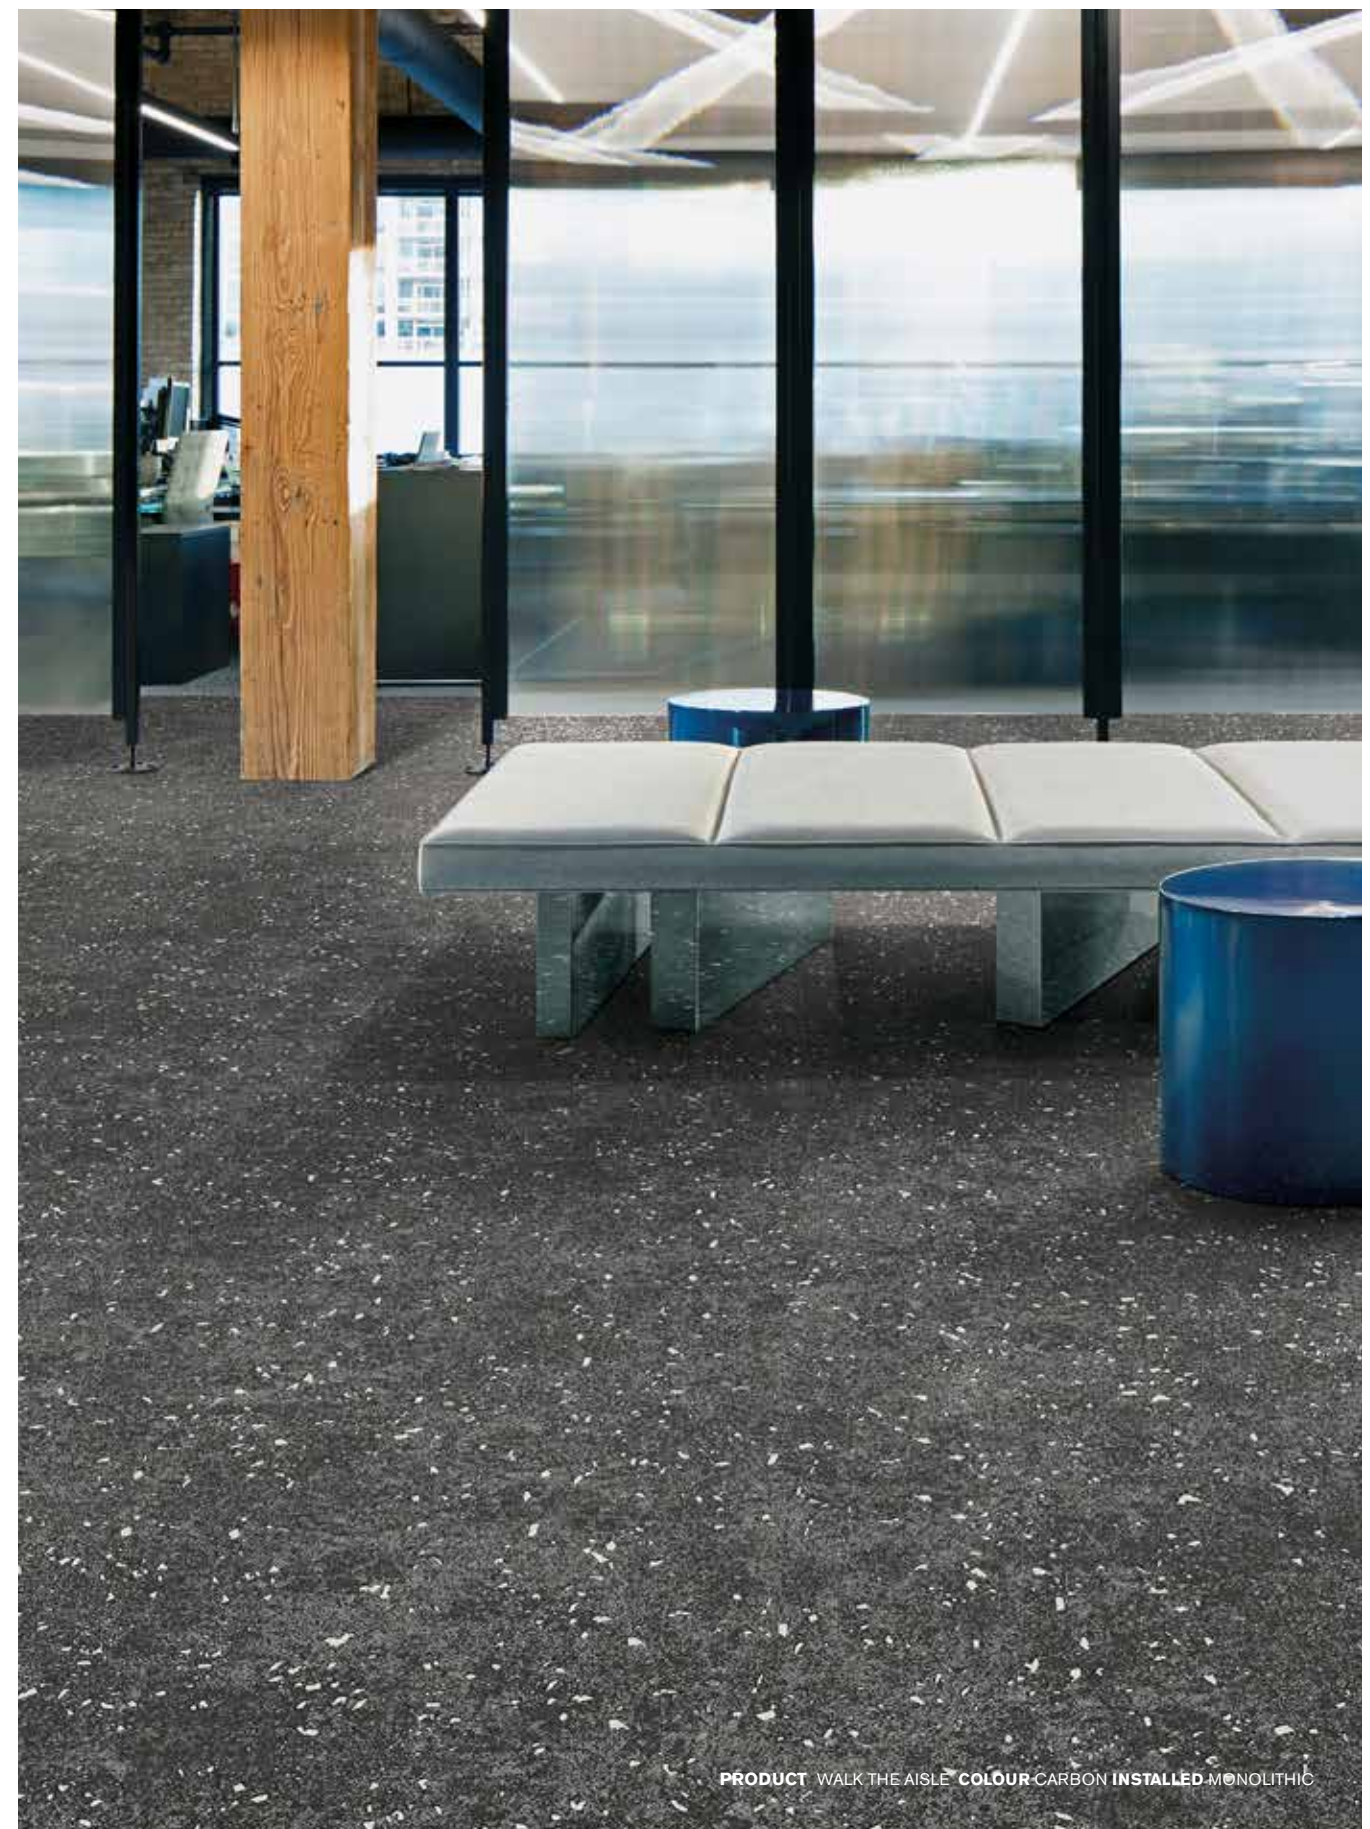

PRODUCT WALK THE AISLE COLOUR CARBON INSTALLED MONOLITHIC







Specifications


Look Both Ways | LVT

Product Name / Number	Walk Of Life - A012 Walk The Aisle - A013 Walk About - A014 Walk On By - A015
Product Construction	High Performance Luxury Vinyl Tile
Wear Layer Thickness	0.55 mm
Total Thickness (Metric)	4.5 mm
Classification	EN 651 Class 33 (heavy contract) EN 651 Class 42 (light industrial general)
Acoustic Impact Noise Reduction	ISO 140.8 ΔLw = 16dB
Finish	Asia - CERAMOR™ UV Stabilized Ceramic Bead Coating ANZ - CERAMOR+™ UV Stabilized Ceramic Bead Coating
Nominal Dimensions	50cm x 50cm

Performance Specifications		
Critical Heat Flux	AS ISO 9239-1	>7kW/m²
Smoke Rate	AS ISO 9239-1	<750%.min
Size, Tolerance	ISO 24342	>400 mm < 0.35 mm
	ISO 24342	<400 mm < 0.25 mm
Dimensional Stability	ISO 23999	<0.25%
	ISO 24346	Average value + 0.20mm
Thickness	ISO 105-B02	≥6
Resistance to Light	ASTM F1514	ΔE< 8 avg Max
Resistance to Heat	EN-ISO 26987	Pass
Resistance to Chemicals	EN ISO 13501-1	Class BFI-S1
Reaction to Fire	ISO 10580	Pass
VOC Test	ISO 24344 Method A	Pass
Flexibility	ASTM F970	≤0.005" with 1500 psi
Static Load	ISO 4918	Pass
Castor chair	EN 12667	0.16 W/mK
Thermal Conductivity	EN 1815	<2kV
Static Electrical	AS 4586-2013	P3 / R10
Slip Resistance		

Environmental Specifications	
Total Recycled Content	39%
Carbon Footprint / m² (Cradle to Gate)*	9.2 kg CO₂
Sustainability Assessment	NSF/ANSI 332, Meets Certification Guidelines
LEED v4	Contributes to IEQ: Low Emitting Materials; M&R: EPD and EPR
Global Green Tag	Green Rate Level A
End of Life	Fully Recyclable to carpet tile Backing Recycling

Technical Information	
Installation	See Interface LVT Installation Guidelines online
Maintenance	See Interface LVT Maintenance Guidelines online
Reclamation	Recyclable through ReEntry®
Warranty	15 Year Standard LVT Product Warranty
Installation Medthod	Ashlar, Brick, Monolithic, Quarter Turn, Non Directional




Production specifications are subject to normal manufacturing tolerances and may be changed without notice. Slight variation in colour among different production lots are normal and should be considered in the overall installation plan. Products covered by manufacturer's written warranty only. All other warranties, including without limitation any implied warranties of merchantability of fitness for particular purpose, are hereby disclaimed. Contact your representative for written warranty information.


* Please see [interface.com](https://www.interface.com) for the most up to date numbers from our EPD.

PRODUCT WALK THE AISLE COLOUR CARBON
PRODUCT WALK ON BY COLOUR POLYCHROME INSTALLED PATTERN BY TILE

Walk of Life™ Colour Range



A01201 WARM ASH



A01205 CHARCOAL



A01202 PUMICE




A01203 COOL ASH




A01204 CARBON


Walk the Aisle™ Colour Range




A01301 WARM ASH



A01302 PUMICE



A01303 COOL ASH



A01304 CARBON


Walk About™ Colour Range




A01401 WARM ASH



A01402 PUMICE



A01403 COOL ASH



A01404 CARBON

Walk on By™ Colour Range



A01501 POLYCHROME



A01502 MONOCHROME

LVT & Carpet. A power duo.

Look Both Ways combines hard and soft flooring with intentional design, which makes choosing the right materials for your space even easier. Seamlessly move from carpet tile in a private work area to LVT in a busy corridor, without changing patterns or using transition strips. Brighten a small, but heavily trafficked space with a lighter shade of LVT and create nested areas with inset area rugs. Every mix is a match with no sacrifice of performance or aesthetics.





LVT WALK THE AISLE COLOUR COOL ASH
CARPET TILE STEP IN TIME COLOUR ASH

Why Our Modular Resilient LVT?

Integrated System.

Say goodbye to transition strips and doubling up. Our modular resilient floorings are made to work as a system with our modular carpet tile. The compatible size and height of our products allows you to integrate modular carpet for an inset rug or an adjacent field – no transition strip required. You'll avoid doubling up on materials and save cost.

Real Flexibility.

Create a unique look that lasts. Interface modular resilient LVT makes it easy to extend the life of your floor. From simple maintenance like damp mopping to selectively replacing damaged tiles, your flooring investment will stand the test of time - beautifully and effortlessly.


Circular System.

Keep flooring out of the landfill. Our modular resilient LVT is produced with a controlled material stream so it can be reclaimed and recycled into our GlasBac™RE recycled content backing through our ReEntry® program.

Noise Reduction.

Less distractions. With our LVT with Sound Choice™ backing. Offering you best-in-class performance for reduced impact sound and floor to floor sound transmission.

Why Our Modular Resilient LVT?

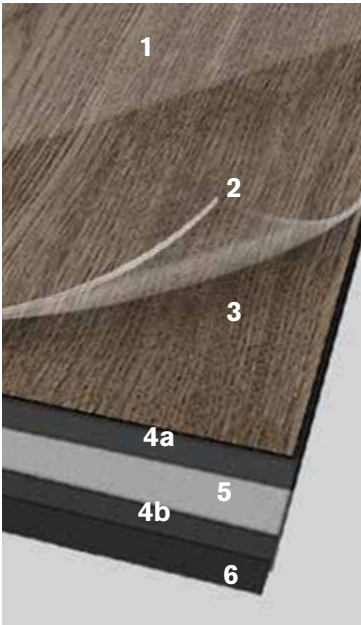

High Performance from Top to Bottom.

- 1. *Ceramor® Coating.* Minimizes everyday scratching and scuffing. *Ceramor+® Coating.* Also provides enhanced slip resistance.
- 2. *Wear Layer.* High quality layer enabling 15 years of resilience and performance.
- 3. *Print Film.* Provides outstanding visuals of natural materials and Interface innovative designs.
- 4a 4b. *Core Sheet.* Creates thickness for a stronger core and reduces telegraphing from beneath.
- 5. *Fiberglass.* Adds dimensional stability and controlled flexibility.
- 6. *Sound Choice™.* Provides comfort and superior acoustic performance.



Third Party Certification.

Carbon Neutral Floors. All Interface flooring sold globally is third party verified carbon neutral. We've taken a holistic approach to achieve carbon neutrality, first through reducing the carbon footprint of our products and then using carbon offsets for the remainder.

Environmental Product Declaration (EPD). Interface LVT products are covered by an EPD. An EPD provides a comprehensive statement of product ingredients and environmental impacts based upon life cycle assessment performed to ISO standards.

Global GreenTag. A product rating system recognised by the Green Building Council of Australia, New Zealand and South Africa. It has been set up to meet the criteria of the Green Star® "Sustainable Products" credits. All Interface products are certified "Level A".

Lloyd's Register. A comprehensive standard for better PVC developed by the Green Building Council of Australia under its Green Star programme. Interface holds Lloyd's Statement of Compliance (Green Building Council of Australia Best Practice Guidelines 2013) for Best Practice PVC for all products made in Australia.

Indoor Air Quality. All Interface modular flooring products meet the highest standards for indoor air quality. Interface LVT is FloorScore® Certified, assuring very low emissions of VOCs.



LVT PRODUCT WALK OF LIFE COLOUR PUMICE INSTALLED MONOLITHIC
CARPET PRODUCT STEP ASIDE COLOUR ALBA INSTALLED ASHLAR



Carbon Neutral Floors™

www.interface.com

Australia

Interface Australia
local toll free: 1800 804 361

India

Interface India
tel: +91 80 4613 1313

South East Asia

Interface Asia
tel: +65 6478 1510

South Korea

Interface South Korea
tel: +82 2 555 1734

Japan

Interface Japan
tel: +81 3 5733 5211

Beijing

Interface China
tel: +86 10 6590 7810

Hong Kong

Interface China
tel: +852 2802 0838

Shanghai

Interface China
tel: +86 21 6340 3868

11/2022
SF0118T0



Climate change is undeniable. And reversible. Our mission is to prove it.
Join the #ClimateTakeBack and help create a climate fit for life.