

Every project is an opportunity for fresh ideas. Enter Studio Set. Thirteen hues selected to serve as your go-to source for colour in LVT. Studio Set is a spectrum of colours from super-saturated brights to ideal neutrals. Take note of the very subtle woodgrain pattern, but don't get stuck in conventional solutions. These Skinny Planks<sup>™</sup> were meant to inspire you to design with pure colour, creating unique compositions or just making a singular bold choice, like a red floor.

Combine Studio Set with Interface carpet tiles side-by-side for an integrated flooring system of hard and soft tiles in Skinny Planks and squares. Interface modular floors allow you to move from surface to surface without the need for transition strips.

And, of course, we design all our products with the ability to feed our recycling program, ReEntry<sup>®</sup>. We're mindful of our commitment to continually minimize our environmental footprint.



PRODUCT STUDIO SET COLOURS PEPPER, PEWTER INSTALLED PATTERN BY TILE

1

A SALING A GING AND A STREET

R.

٠E

10.04


個體

-

1000

P STOLEN

T III

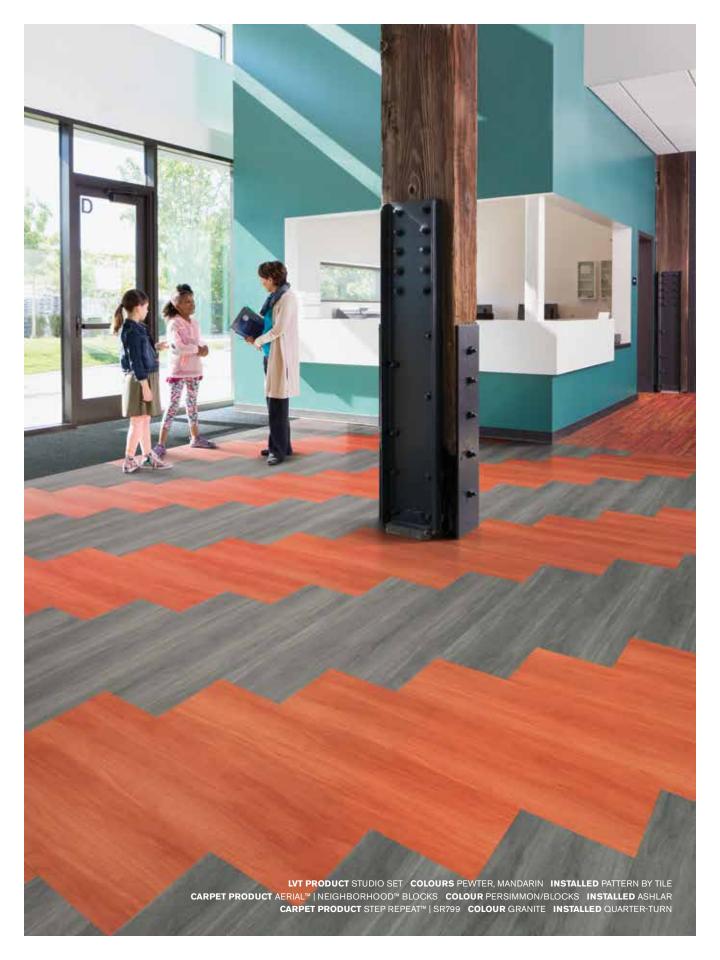





### Specifications

### Studio Set Colour Range

Product Number	A007
Product Construction	High Performance Luxury Vinyl Plank
Wear Layer Thickness	0.55 mm
Total Thickness (Metric)	4.5 mm
Classification	EN 651 Class 33 (heavy contract)
	EN 651 Class 42 (light industrial general)
Acoustic Impact Noise Reduction	ISO 140.8 ΔL <sub>w</sub> = 16dB
Finish	CERAMOR <sup>™</sup> UV Stabilized Ceramic Bead Coating
Nominal Dimensions	25cm x 100cm

#### **Performance Specifications**

Critical Heat Flux	AS ISO 9239-1	>7kW/m <sup>2</sup>
Smoke Rate	AS ISO 9239-1	<750%.min
Size, Tolerance	ISO 24342	>400 mm < 0.35 mm
	ISO 24342	<400 mm < 0.25 mm
Dimensional Stability	ISO 23999	<0.25%
Thickness	ISO 24346	Average value + 0.20mm
Resistance to Light	ISO 105-B02	≥6
Resistance to Heat	ASTM F1514	ΔE< 8 avg Max
Resistance to Chemicals	EN-ISO 26987	Pass
Reaction to Fire	EN ISO 13501-1	Class BFI-S1
VOC Test	ISO 10580	Pass
Flexibility	ISO 24344 Method A	Pass
Static Load	ASTM F970	≤0.005" with 1500 psi
Castor chair	ISO 4918	Pass
Thermal Conductivity	EN 12667	0.16 W/mK
Static Electrical	EN 1815	<2kV
Slip Resistance	AS 4586-2013	P3 / R10

#### **Environmental Specifications**

Total Recycled Content	39%
Carbon Footprint / m <sup>2</sup> (Cradle to Gate) <sup>3</sup>	* 9.2 kg CO <sub>2</sub>
Sustainability Assessment	NSF/ANSI 332, Meets Certification Guidelines
LEED v4	Contributes to IEQ: Low Emitting Materials; M&R: EPD and EPR
Global Green Tag	Green Rate Level A
End of Life	Fully Recyclable to carpet tile Backing Recycling

#### **Technical Information**

Installation	
Maintenance	
Reclamation	
Warranty	
Installation Methods	

See Interface LVT Installation Guidelines online See Interface LVT Maintenance Guidelines online View details on our ReEntry<sup>®</sup> Program 15 Year Standard LVT Product Warranty Ashlar, Herringbone





Production specifications are subject to normal manufacturing tolerances and may be changed without notice. Slight variation in colour among different production lots are normal and should be considered in the overall installation plan. Products covered by manufacturer's written warranty only. All other warranties, including without limitation any implied warranties of merchantability of fitness for particular purpose, are hereby disclaimed. Contact your representative for written warranty information.





A007-01 SILVERLIGHT

A007-02 PEWTER



A007-03 PEPPER

A007-04 ESPRESSO





A007-05 TITANIUM





A007-07 LIME



A007-09 OCEAN





A007-12 MARIGOLD


A007-10 POPPY




A007-13 SLATE








PRODUCT STUDIO SET COLOURS SILVERLIGHT, PEWTER, OCEAN, MANDARIN INSTALLED PATTERN BY TILE (ASHLAR)

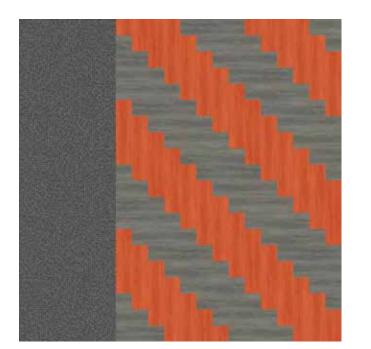



LVT PRODUCT STUDIO SET COLOURS PEWTER, MANDARIN INSTALLED PATTERN BY TILE (HERRINGBONE) CARPET PRODUCT STEP REPEAT | SR799 COLOUR GRANITE INSTALLED QUARTER-TURN




PRODUCT STUDIO SET COLOURS PEWTER, SLATE INSTALLED PATTERN BY TILE (ASHLAR)



PRODUCT STUDIO SET COLOURS PEWTER, OCEAN, MANDARIN INSTALLED PATTERN BY TILE (ASHLAR)






PRODUCT STUDIO SET COLOURS PEPPER, PEWTER INSTALLED PATTERN BY TILE




**PRODUCT** STUDIO SET **COLOURS** ESPRESSO, TITANIUM, POPPY **INSTALLED** PATTERN BY TILE (ASHLAR)




PRODUCT STUDIO SET COLOURS PEPPER, LIME, MARIGOLD, OCEAN **INSTALLED** PATTERN BY TILE (ASHLAR)



PRODUCT STUDIO SET COLOURS SILVERLIGHT, PEWTER, PEPPER, MARIGOLD



**INSTALLED** PATTERN BY TILE



# Install next to carpet tile **without** transition strips.

Integrated System.

Say goodbye to transition strips and doubling up. Our modular resilient floorings are made to work as a system with our modular carpet tile. The compatible size and height of our products allows you to integrate modular carpet for an inset rug or an adjacent field – no transition strip required. You'll avoid doubling up on materials and save cost.

# Real Flexibility.

*Create a unique look that lasts.* Interface modular resilient LVT makes it easy to extend the life of your floor. From simple maintenance like damp mopping to selectively replacing damaged tiles, your flooring investment will stand the test of time - beautifully and effortlessly.


# Circular System.

*Keep flooring out of the landfill.* Our modular resilient LVT is produced with a controlled material stream so it can be reclaimed and recycled into our GlasBac<sup>™</sup>RE recycled content backing through our ReEntry<sup>®</sup> program.

## Noise Reduction.

*Less distractions.* With our LVT with Sound Choice<sup>™</sup> backing. Offering you best-in-class performance for reduced impact sound and floor to floor sound transmission.

CARPET PRODUCT ON LINE<sup>™</sup> COLOUR STORM LVT PRODUCT STUDIO SET COLOUR SLATE

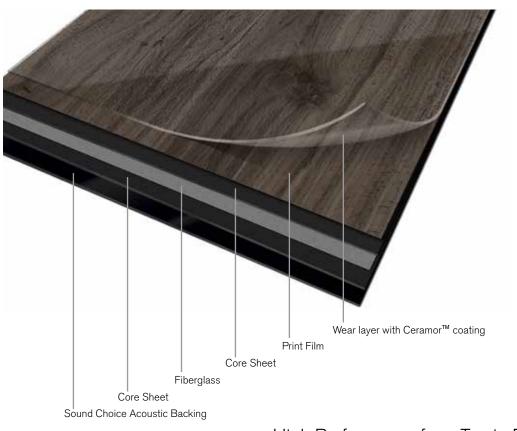

### High Performance from Top to Bottom.

From our Ceramor<sup>™</sup> Top Coat to our Sound Choice<sup>™</sup> backing, we've designed our modular resilient LVT to provide peak performance in even the most challenging work environment while also providing superior sound absorption.

Abrasion Resistance. Our Ceramor ceramic bead coating provides a durable finish that resists scratching and scuffing so your floors look better longer. Embossing adds texture to further enhance durability.

A Strong Core. Incorporating a fiberglass layer between two core sheets provides optimal dimensional stability and flexibility, allowing for a fully modular installation and the ability to move and update with ease.

Quiet Comfort. (or just "Quiet.") With an IIC rating of 57 our Sound Choice backing provides superior protection against vertical sound transfer. Minimizing noise enhances workplace productivity and creates more usable, comfortable spaces.





#### www.interface.com

#### South East Asia

Interface Asia tel: 65-6478 1510 www.interface.com

#### South Korea

tel. 82-2-555 1734 www.interface.com

#### Japan

Interface Japan tel: 81-3-5733 5211 www.interface.com

#### India

Interface India tel: 91 80 46131313 www.interface.com

#### **Beijing Studio**

Interface China tel: 86-10-6590 7810 www.interface.com.cn

#### **Hongkong Studio**

Interface China tel: 852-2802 0838 www.interface.com.cn

#### Shanghai Studio

Interface China tel: 86-21-6340 3868 www.interface.com.cn

#### Australia

Interface Australia local toll free: 1800 008 101 www.interface.com

08/2018 SF0110T0



Climate change is undeniable. And reversible. Our mission is to prove it. Join the #ClimateTakeBack and help create a climate fit for life.