



Moven Gradience

WG100
WG200

Interface®



PRODUCT WG100 COLOURS TERRACOTTA, LAGOON & STONE INSTALLED MONOLITHIC
PRODUCT WG200 COLOURS STONE/TERRACOTTA & STONE/LAGOON INSTALLED DESIGN BY TILE



EN

Woven Gradience celebrates colour whilst seamlessly blending into your surroundings.

Just like nature, the colours of Woven Gradience are both soothing and exciting. Vibrant pinks blend seamlessly with calming emerald tones. Rich terracotta transitions beautifully into soothing aqua. Each shade is grounded by soft, relaxing grey tones that allow you to connect spaces and create bespoke areas.

FR

Woven Gradience célèbre la couleur tout en se fondant parfaitement avec votre environnement.

Comme dans la nature, les couleurs de Woven Gradience sont à la fois reposantes et stimulantes. Les roses intenses se mêlent harmonieusement à des tons émeraude apaisants. Le puissant terracotta se transforme en douceur en des tons aquatiques. Chaque nuance est mise en valeur par des tons de gris relaxants qui vous permettent de relier les espaces et de créer des zones sur mesure pour les occupants de l'espace.

DE

Woven Gradience zelebriert Farbe und fügt sich dabei nahtlos in Ihre Umgebung ein.

Wie die Natur wirken auch die Farben von Woven Gradience beruhigend und aufregend. Lebendiges Rosa verschmilzt mit wohltuenden Smaragdtönen. Sattes Terrakotta geht harmonisch in beruhigendes Aqua über. Jeder Farbton ruht auf sanften, entspannenden Grautönen, die es Ihnen ermöglichen, Räume miteinander zu verbinden oder individuelle Bereiche für die Raumnutzer zu gestalten.



NL

Woven Gradience is een feest van kleur dat naadloos op uw omgeving aansluit.

Net als de natuur zijn de kleuren van Woven Gradience zowel rustgevend als uitdagend. Levendig roze gaat naadloos over in rustgevende smaragdtinten. Rijke terracotta gaat fraai over in rustgevend aqua. Elke schakering rust op zachte, ontspannende grijs tinten die het mogelijk maken ruimtes met elkaar te verbinden en speciaal voor gebruikers in te richten.

ES

Woven Gradience celebra el color al tiempo que se adapta perfectamente con tus entornos.

Al igual que la naturaleza, Woven Gradience es tan relajante como estimulante. Rosas vivos se funden a la perfección con tonos esmeralda que inducen a la calma. Los ricos terracota dan paso maravillosamente a un agradable aguamarina. Cada matiz se basa en ricos tonos grises relajantes que te permiten conectar espacios y crear zonas a medida para los usuarios de los espacios.

SE

Woven Gradience hyllar färg och smälter samtidigt in perfekt i din omgivning

Precis som i naturen är färgerna i Woven Gradience både lugnande och upplyftande. Livfull rosa blandas harmoniskt med lugnande smaragdtoner. Mustig terrakotta övergår perfekt i lugnande aqua-blått. Varje nyans omges av mjuka, lugnande gråtoner som låter dig koppla samman utrymmen och skapa särskilda ytor för olika användare.



CARPET PRODUCT WG100 **COLOUR** OCEAN
CARPET PRODUCT WG200 **COLOURS** CHARCOAL/OCEAN & STONE / CHARCOAL **INSTALLED** DESIGN BY TILE
LVT PRODUCT LEVEL SET STONES **COLOUR** COOL POLOSHED CEMENT **INSTALLED** NON DIRECTIONAL





PRODUCT WG100 COLOURS TERRACOTTA & STONE
PRODUCT WG200 COLOUR STONE/TERRACOTTA INSTALLED BRICK




PRODUCT WG100 COLOURS FOREST, CHARCOAL & SAGE INSTALLED MONOLITHIC
PRODUCT WG200 COLOURS CHARCOAL/FOREST, STONE/CHARCOAL, PEARL/SAGE & PEARL/STONE INSTALLED DESIGN BY TILE




CARPET PRODUCT WG100 COLOUR SUNRISE INSTALLED MONOLITHIC
CARPET PRODUCT WG200 COLOUR PEARL / SUNRISE INSTALLED DESIGN BY TILE
LVT PRODUCT LEVEL SET TEXTURED STONES COLOUR DISTRESSED CONCRETE INSTALLED NON DIRECTIONAL


Woven Gradience Colour Range




WG100 4306001 INK




WG100 4306006 EMERALD



WG100 4306007 OCEAN



WG100 4306009 TERRACOTTA



WG100 4306012 SUNRISE




WG100 4306002 CHARCOAL




WG200 4307001 CHARCOAL / INK




WG200 4307005 INK / EMERALD




WG200 4307006 CHARCOAL / OCEAN




WG200 4307008 STONE / TERRACOTTA



WG200 4307011 PEARL / SUNRISE




WG200 4307002 STONE / CHARCOAL




WG200 4307002 STONE / CHARCOAL



WG200 4307004 INK / ROSE




WG200 4307007 CHARCOAL / FOREST



WG200 4307009 STONE / LAGOON



WG200 4307010 PEARL / SAGE



WG200 4307003 PEARL / STONE




WG100 4306003 STONE




WG100 4306005 ROSE



WG100 4306008 FOREST



WG100 4306010 LAGOON



WG100 4306011 SAGE



WG100 4306004 PEARL



Carbon Footprint / m² (Cradle to Gate)*

3.57_{kg CO₂}

Total Recycled and Bio-Based Content

93.7_%

Total Virgin Content (non recycled and non bio-based)

6.3_%

Yarn Recycled Content

100_%

* Please see [interface.com](https://www.interface.com) for the most up to date numbers from our EPD.

Installation Waste

Monolithic

3-4_%

Brick
Ashlar

3-5_%

Wear Classification

Class 33 Heavy Contract

Impact Sound Insulation ΔL_w EN ISO 10140-3

27_{dB}

Rating of Sound Absorption EN ISO 11654

α_w 0.20

Potential Green Building Contribution



See contributions for each at [interface.com](https://www.interface.com)

Certifications



For more information visit [interface.com](https://www.interface.com)



PRODUCT WG100 **COLOURS** INK, PEARL, STONE & CHARCOAL **INSTALLED** MONOLITHIC
PRODUCT WG200 **COLOURS** CHARCOAL/INK, STONE/CHARCOAL, STONE/CHARCOAL & PEARL/STONE **INSTALLED** DESIGN BY TILE

Sustainability - Woven Gradience

Standard Backing CQuest™Bio

CQUEST™BIO
Backing

EN

CQuest™Bio is non-vinyl, non-bitumen made with a bio-composite, containing bio-based and recycled fillers. These materials, when measured on a standalone basis are net carbon negative.

DE

CQuest™Bio ist eine PVC- und bitumenfreie Rückenkonstruktion, in der biobasierte und recycelte Füllstoffe verwendet werden. Einige der darin enthaltenen Materialien sind für sich betrachtet netto CO₂-negativ und reduzieren unseren CO₂-Fußabdruck maßgeblich.

FR

CQuest™Bio est notre nouvelle sous-couche pour dalles de moquette, sans PVC et sans bitume. Elle est fabriquée avec un bio-composite, mélange de matériaux bio-sourcés et recyclés au bilan carbone net négatif.

NL

CQuest™Bio is onze nieuwe vinylvrije, niet-bitumen tapijttegelpacking gemaakt van een bio-composiet met biobased en gerecyclede vulstoffen. Deze materialen, gemeten op een stand-alone basis, zijn netto CO₂-negatief.


ES

CQuest™Bio no contiene vinilo ni bitumen. Está fabricado con compuestos bio y rellenos orgánicos y reciclados. Estos materiales son negativos en emisiones de carbono.

SE

CQuest™Bio är vår nya baksida för textilplattor. Den innehåller varken vinyl eller bitumen utan är tillverkad av biokomposit som innehåller biobaserade och återvunna fyllnadsmaterial. Detta gör CQuest™Bio netto koldioxidnegativ.

ReEntry®



EN

Interface promises to take back our customers used flooring product (carpet tile, LVT and Rubber) and create further value with them in the most sustainable way.

DE

Wir geben Ihnen das Versprechen, Ihre gebrauchten Interface-Bodenbeläge zurückzunehmen und damit einen Mehrwert auf nachhaltigste Art und Weise zu schaffen.

FR

Interface s'engage à reprendre les revêtements de sol usagés de ses clients et à leur donner une deuxième vie de la façon la plus éco-responsable possible.


NL

Interface belooft onze gebruikte vloerproducten van klanten terug te nemen en creëert daarmee meerwaarde in de meest duurzame manier.


ES

Interface se compromete a (moqueta modular, LVT y caucho) recuperar los pavimentos usados de nuestros clientes y crear valor a partir de ellos de la forma más sostenible.


Design Ideas Below are floor layouts showing how to create the design ideas shared in several of the images featured in this brochure.

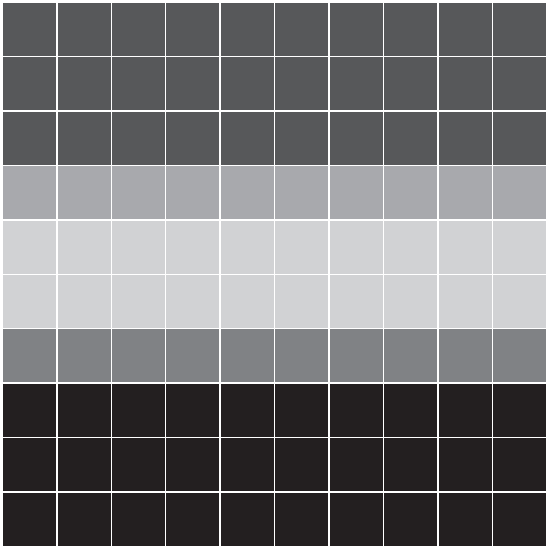


- PRODUCT WG100 COLOUR TERRACOTTA INSTALLED MONOLITHIC
- PRODUCT WG100 COLOUR LAGOON INSTALLED MONOLITHIC
- PRODUCT WG200 COLOUR STONE/TERRACOTTA INSTALLED DESIGN BY TILE
- PRODUCT WG200 COLOUR STONE/LAGOON INSTALLED DESIGN BY TILE
- PRODUCT WG100 COLOUR STONE INSTALLED MONOLITHIC

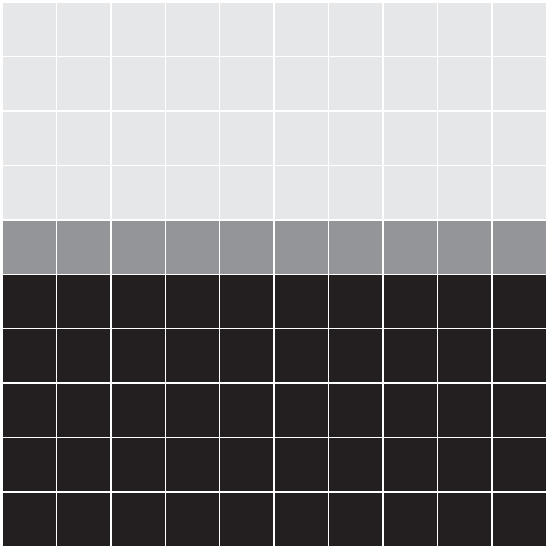

- PRODUCT WG100 COLOUR ROSE INSTALLED MONOLITHIC
- PRODUCT WG100 COLOUR INK INSTALLED MONOLITHIC
- PRODUCT WG200 COLOUR INK/ROSE INSTALLED DESIGN BY TILE

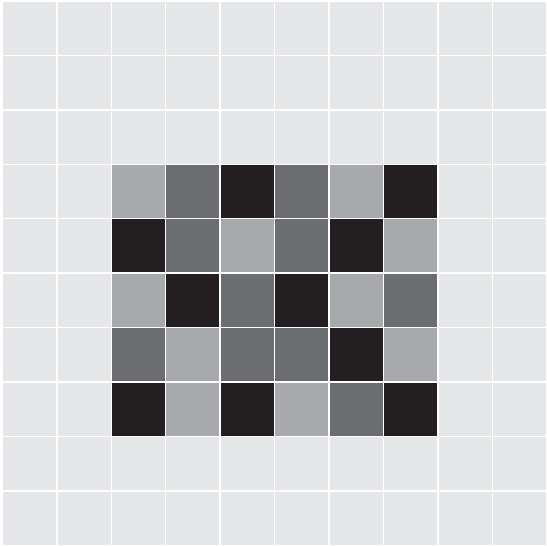


- PRODUCT WG100 COLOUR OCEAN INSTALLED DESIGN BY TILE
- PRODUCT WG200 COLOUR CHARCOAL/OCEAN INSTALLED NON DIRECTIONAL
- PRODUCT WG200 COLOUR STONE / CHARCOAL INSTALLED NON DIRECTIONAL
- PRODUCT IRIDESCENCE COLOUR POLAR INSTALLED NON DIRECTIONAL

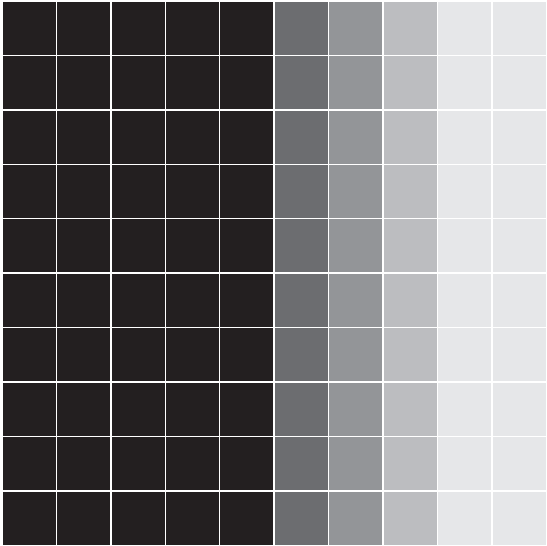


- PRODUCT WG100 COLOUR CHARCOAL INSTALLED MONOLITHIC
- PRODUCT WG200 COLOUR CHARCOAL/INK INSTALLED DESIGN BY TILE
- PRODUCT WG100 COLOUR INK INSTALLED MONOLITHIC
- PRODUCT WG200 COLOUR INK/EMERALD INSTALLED DESIGN BY TILE
- PRODUCT WG100 COLOUR EMERALD INSTALLED MONOLITHIC


Design Ideas Below are floor layouts showing how to create the design ideas shared in several of the images featured in this brochure.

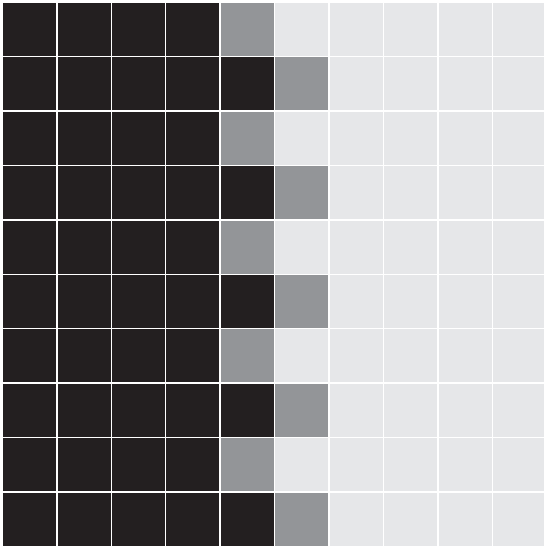


■ **PRODUCT** WG100 **COLOUR** TERRACOTTA **INSTALLED** BRICK
■ **PRODUCT** WG200 **COLOUR** STONE/TERRACOTTA **INSTALLED** DESIGN BY TILE
■ **PRODUCT** WG100 **COLOUR** STONE **INSTALLED** BRICK

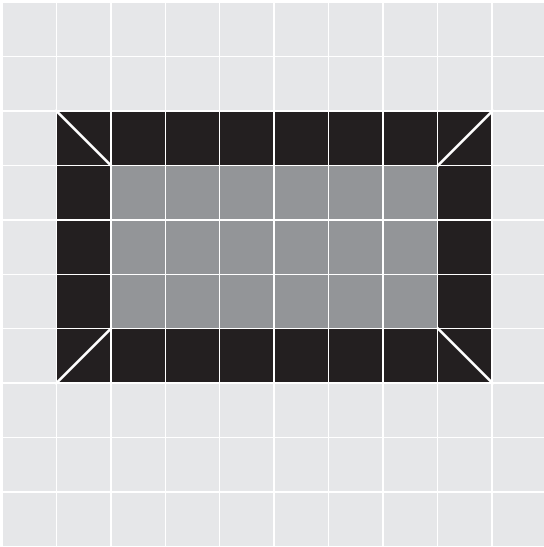

■ **PRODUCT** WG200 **COLOUR** PEARL / SUNRISE **INSTALLED** DESIGN BY TILE
■ **PRODUCT** WG100 **COLOUR** SUNRISE **INSTALLED** MONOLITHIC
■ **PRODUCT** LEVEL SET TEXTURED STONES **COLOUR** DISTRESSED CONCRETE **INSTALLED** NON DIRECTIONAL

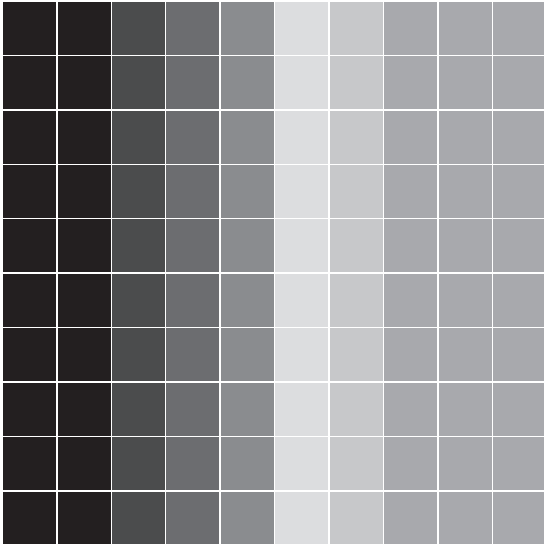

■ **PRODUCT** WG100 **COLOUR** FOREST **INSTALLED** MONOLITHIC
■ **PRODUCT** WG200 **COLOUR** CHARCOAL/FOREST **INSTALLED** DESIGN BY TILE
■ **PRODUCT** WG100 **COLOUR** CHARCOAL **INSTALLED** MONOLITHIC
■ **PRODUCT** WG200 **COLOUR** STONE/CHARCOAL **INSTALLED** DESIGN BY TILE
■ **PRODUCT** WG200 **COLOUR** PEARL/STONE **INSTALLED** DESIGN BY TILE
■ **PRODUCT** WG200 **COLOUR** PEARL/SAGE **INSTALLED** DESIGN BY TILE
■ **PRODUCT** WG100 **COLOUR** SAGE **INSTALLED** MONOLITHIC

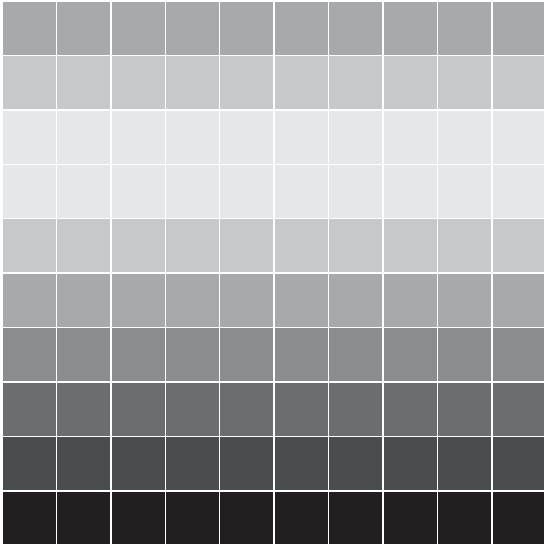

■ **PRODUCT** WG100 **COLOUR** INK **INSTALLED** MONOLITHIC
■ **PRODUCT** WG200 **COLOUR** CHARCOAL/INK **INSTALLED** DESIGN BY TILE
■ **PRODUCT** WG100 **COLOUR** CHARCOAL **INSTALLED** MONOLITHIC
■ **PRODUCT** WG200 **COLOUR** STONE/CHARCOAL **INSTALLED** DESIGN BY TILE
■ **PRODUCT** WG100 **COLOUR** STONE **INSTALLED** MONOLITHIC
■ **PRODUCT** WG200 **COLOUR** PEARL/STONE **INSTALLED** DESIGN BY TILE
■ **PRODUCT** WG100 **COLOUR** PEARL **INSTALLED** MONOLITHIC

Technical Specifications

WG100

Product Definition		Tufted Patterned Structured Loop Pile
Konstruktion	Tuftgemusterte strukturierte Schlingenqualität	
Descripción	Moqueta modular tufting bucle estructurado con diseño	
Description	Dalle de moquette à velours tufté bouclé structuré à motifs	
Type	Getufte gedessineerde gestructureerde bouclé	
Descrizione	Bouclé tufted strutturato	
Pile Material		100% Recycled Solution Dyed Nylon
Polfasermaterial	100% recycledes Polyamid garngefärbt	
Composición Fibra	100% Poliamida reciclada tintada en masa	
Composition	100% Polyamide recyclé teint masse	
Poolmateriaal	100% Solution Dyed Gerecycled Polyamide	
Fibra	100% Poliammide tinta in massa riciclata	
Pile Yarn Weight / Poleinsatzgewicht / Peso Fibra / Poids de fibre / Poolinzetgewicht / Peso Felpa		780 g/m² ± 5%
Total Weight / Gesamtgewicht / Peso Total / Poids total / Totaalgewicht / Peso Totale		4169 g/m² ± 5%
Pile Height / Polschichtdicke / Altura Fibra / Hauteur de la fibre / Poolhoogte / Altezza Felpa		3.1 mm + 15% / - 10%
Total Thickness / Gesamtdicke / Espesor Total / Epaisseur totale / Totale dikte / Altezza Totale		6.8 mm ± 0.5 mm
Gauge/Ends 10 cm / Teilung x 10 cm / Galga x10 cm / Jauge-Rangs par 10 cm / Rijen per 10 cm / Serraggio x 10 cm		1/12 – 472
Tufts per m² / Noppenzahl/m² / Puntadas m² / Densité du tuft par m² / Aantal noppen per m² / Densità Punti		184,080 ± 5%
Backing Type / Rückenkonstruktion / Soporte / Sous-couche / Ruguitvoering / Sottofondo		CQuest™Bio
Wear Classification / Beanspruchungsklasse / Clasificación al tráfico / Classement d'usage et de confort / Gebruiksintensiteit / Resistenza all'usura		Heavy Contract (EN 1307) Class 33 / LC2
Radiant Panel /Schwerentflammbarkeit / Clasificación Al Fuego /Classement feu / De Radiant Panel Test / Valutazione delle proprietà ignifughe		(EN ISO 9239-1) Euroclass Bfl s1 (EN 13501-1)
Dimensional Stability / Dimensionsstabilität / Estabilidad Dimensional /Stabilité dimensionnelle / Dimensionele stabiliteit / Test Stabilità dimensionale		≤ 0.2% (EN 986)
Impact Sound Insulation (ΔL_w) / Trittschallverbesserungsmaß / Impacto Aislamiento Acústico / Réduction du bruit d'impact / Contactgeluid absorptie / Isolamento all'impatto acustico		27 dB (EN ISO 10140-3)
Rating of Sound Absorption / Gewichteter Schallabsorptionskoeffizient/ Clasificación de Absorción de Sonido / Coefficient d'absorption acoustique /Waarde geluidsabsorptie / Valutazione dell'assorbimento acustico		α _w 0.20 (EN ISO 11654)
Sound Absorption / Schallabsorptionsgrad / Absorción de Sonido / Absorption acoustique / Geluidsabsorptie / Assorbimento acustico		
125Hz	250Hz	500Hz
1000Hz	2000Hz	4000Hz
(EN ISO 354)		
-0.02	0.06	0.08
0.20	0.34	0.40
α _s		


Style	4306	4m² - 16 tiles per box (50 x 50 cm ± 0.2%)
--------------	------	--



DOP: 1037/128386
EN 14041:2004
Notified Body - 0493
COC
0493 – CPR – 0181
For use as floor covering in buildings



DOP: 1037/128386
EN 14041:2004
Approved Body - 8515
COC
8515 – CPR – 0181
For use as floor covering in buildings




≥7 ≥2.4



DOP: 1037/128386
EN 14041:2004
Notified Body - 0493
COC
0493 – CPR – 0181
For use as floor covering in buildings



DOP: 1037/128386
EN 14041:2004
Approved Body - 8515
COC
8515 – CPR – 0181
For use as floor covering in buildings



≥7 ≥2.4



WG200

Product Definition		Tufted Patterned Structured Loop Pile				
Konstruktion	Tuftgemusterte strukturierte Schlingenqualität					
Descripción	Moqueta modular tufting bucle estructurado con diseño					
Description	Dalle de moquette à velours tufté bouclé structuré à motifs					
Type	Getufte gedessineerde gestructureerde bouclé					
Descrizione	Bouclé tufted strutturato					
Pile Material		100% Recycled Solution Dyed Nylon				
Polfasermaterial	100% recycledes Polyamid garngefärbt					
Composición Fibra	100% Poliamida reciclada tintada en masa					
Composition	100% Polyamide recyclé teint masse					
Poolmateriaal	100% Solution Dyed Gerecycled Polyamide					
Fibra	100% Poliammide tinta in massa riciclata					
Pile Yarn Weight / Poleinsatzgewicht / Peso Fibra / Poids de fibre / Poolinzetgewicht / Peso Felpa		780 g/m² ± 5%				
Total Weight / Gesamtgewicht / Peso Total / Poids total / Totaalgewicht / Peso Totale		4169 g/m² ± 5%				
Pile Height / Polschichtdicke / Altura Fibra / Hauteur de la fibre / Poolhoogte / Altezza Felpa		3.1 mm+ 15% / - 10%				
Total Thickness / Gesamtdicke / Espesor Total / Epaisseur totale / Totale dikte / Altezza Totale		6.8 mm ± 0.5 mm				
Gauge/Ends 10 cm / Teilung x 10 cm / Galga x10 cm / Jauge-Rangs par 10 cm / Rijen per 10 cm / Serraggio x 10 cm		1/12 – 472				
Tufts per m² / Noppenzahl/m² / Puntadas m² / Densité du tuft par m² / Aantal noppen per m² / Densità Punti		184,080 ± 5%				
Backing Type / Rückenkonstruktion / Soporte / Sous-couche / Ruguitvoering / Sottofondo		CQuest™Bio				
Wear Classification / Beanspruchungsklasse / Clasificación al tráfico / Classement d'usage et de confort / Gebruiksintensiteit / Resistenza all'usura		Heavy Contract (EN 1307) Class 33 / LC2				
Radiant Panel /Schwerentflammbarkeit / Clasificación Al Fuego /Classement feu / De Radiant Panel Test / Valutazione delle proprietà ignifughe		(EN ISO 9239-1) Euroclass Bfl s1 (EN 13501-1)				
Dimensional Stability / Dimensionsstabilität / Estabilidad Dimensional /Stabilité dimensionnelle / Dimensionele stabiliteit / Test Stabilità dimensionale		≤ 0.2% (EN 986)				
Impact Sound Insulation (ΔL_w) / Trittschallverbesserungsmaß / Impacto Aislamiento Acústico / Réduction du bruit d'impact / Contactgeluid absorptie / Isolamento all'impatto acustico		27 dB (EN ISO 10140-3)				
Rating of Sound Absorption / Gewichteter Schallabsorptionskoeffizient/ Clasificación de Absorción de Sonido / Coefficient d'absorption acoustique /Waarde geluidsabsorptie / Valutazione dell'assorbimento acustico		α _w 0.20 (EN ISO 11654)				
Sound Absorption / Schallabsorptionsgrad / Absorción de Sonido / Absorption acoustique / Geluidsabsorptie / Assorbimento acustico						
125Hz	250Hz	500Hz	1000Hz	2000Hz	4000Hz	(EN ISO 354)
-0.02	0.06	0.08	0.20	0.34	0.40	α _s


Style	4307	4m² - 16 tiles per box (50 x 50 cm ± 0.2%)
--------------	------	--



DOP: 1037/128386
EN 14041:2004
Notified Body - 0493
COC
0493 – CPR – 0181
For use as floor covering in buildings



DOP: 1037/128386
EN 14041:2004
Approved Body - 8515
COC
8515 – CPR – 0181
For use as floor covering in buildings



≥7 ≥2.4



Light Values

Product	Colour No	Colour Name	L Value*	Y Value*
Woven Gradience - WG100	4306001	Ink	29.7	6.1
	4306002	Charcoal	37.0	9.5
	4306003	Stone	48.4	17.1
	4306004	Pearl	58.5	26.5
	4306005	Rose	32.8	7.5
	4306006	Emerald	27.9	5.4
	4306007	Ocean	28.2	5.5
	4306008	Forest	34.6	8.3
	4306009	Terracotta	36.3	9.1
	4306010	Lagoon	40.7	11.7
	4306011	Sage	49.1	17.7
	4306012	Sunrise	56.3	24.2
Woven Gradience - WG200	4307001	Charcoal/Ink	33.9	8.0
	4307002	Stone/Charcoal	43.4	13.4
	4307003	Pearl/Stone	53.9	21.8
	4307004	Ink/Rose	31.8	7.0
	4307005	Ink/Emerald	28.8	5.8
	4307006	Charcoal/Ocean	34.2	8.1
	4307007	Charcoal/Forest	36.1	9.1
	4307008	Stone/Terracotta	42.1	12.6
	4307009	Stone/Lagoon	43.8	13.7
	4307010	Pearl/Sage	54.0	22.0
	4307011	Pearl/Sunrise	57.6	25.5

- * **Light Value:** L Value = L according to CIE L*a*b* colour space, Y Value = Light Reflectance Value according to BS 8493
- Lichtreflexionswerte:** L-Wert = L gemäß CIE L*a*b* Farbspektrum, Y-Wert = Lichtreflexionswert gemäß British Standard BS 8493
- Valores de Reflectancia de Luz:** Valor L= L según CIE L*a*b* espacio de color, Valor Y = Valor de reflectancia de luz según el estándar británico BS 8493
- Valeurs concernant la lumière:** Valeur L = L faisant référence à la méthode CIE L*a*b* pour la couleur , Valeur Y = Valeurs de réflectance de la lumière selon le British Standard BS 8493
- Licht waarden:** L Waarde = L volgens CIE L*a*b*kleurruimte, Y Waarde = Licht Reflectie Waarde volgens BS 8493
- Indici di riflettanza alla luce:** Indice L= L secondo CIE L*a*b* colour space, IndiceY= Indice di riflettanza alla luce secondo la norma BS 8493

Europe, Middle East & Africa

AE	+971 44508175
AT	+43 1 8102839
BA	+387 33 522 534
BE	+32 2 475 27 27
BG	+359 2 808 303
BY	+375 17 226 75 14
CH	+41 44 913 68 00
CZ	+42 0 233 087 111
DE	+49 2151 3718 0
DK	+45 33 79 70 55
EE	+372 6518 313
ES	+34 932 418 750
EG	+(202) 3760 7818
FR	+33 1 58 10 20 20
GR	+30 211 2120820
HR	+385 14 62 30 63
HU	+36 1 349 6545
IE	+353 1 679 8466
IL	+972 97403034
IT	+39 02 890 93678
KZ	+7 701 391 88 13
LT	+370 37 337332
LV	+371 672 18 744
NL	+31 33 277 5555
ME	+381 11 414 92 00
MK	+389 2 323 01 89
NO	+47 23 12 01 70
PL	+48 22 862 48 40
PT	+351 217 122 740
RO	+40 21 317 12 40/42/43/44
RS	+381 11 414 92 00
SA	+966 554622263
SE	+468 241 230
SK	+421 911 104 073
SI	+386 8 205 4007
TR	+ 90 212 248 97 77
UA	+38(044)238 27 67
UK	+44 (0)800 3134465
ZA	+27 11 608 4270