



**Interface***Hospitality*

**Welcome to beautiful,  
modular flooring design.**

*Our Luxury Vinyl Tile Collections*

Interface<sup>®</sup> Hospitality

## Beautiful Luxury Vinyl Tile flooring that performs.

We've designed our LVT and Carpet Tiles to work together seamlessly – with no transition strips. This effortless meeting of hard surfaces, soft textures, endless pattern and colour combinations allows you to create stunning flooring designs.

Together with Interface's truly unique offering of products and services, you'll have everything you need to meet your next design challenge and create spaces people love to be in.

Our LVT designs come with our superior Sound Choice<sup>™</sup> backing\*. So even hard floors can minimise noise, making it easier for you to create spaces for concentration and focus. And as with all interface flooring, all our products are carbon neutral with Carbon Neutral Floors<sup>™</sup>.

*\*not applicable to Criterion Classic Woodgrains*


# A wealth of design choice.

## Luxury Vinyl Tile Products

With thoughtful consideration for design, performance and a sustainable path, we've created an offering of luxury vinyl tile to fit perfectly into the Interface Hospitality modular flooring system.

|                                       |           |
|---------------------------------------|-----------|
| <b>Brushed Lines</b>                  | <b>06</b> |
| <b>Drawn Lines</b>                    | <b>14</b> |
| <b>Level Set® Collection</b>          | <b>18</b> |
| Natural Stones                        | 20        |
| Textured Stones                       | 22        |
| Natural Woodgrains                    | 24        |
| Textured Woodgrains                   | 26        |
| <b>Studio Set</b>                     | <b>28</b> |
| <b>Look Both Ways™ Collection</b>     | <b>32</b> |
| Walk About                            | 34        |
| Walk of Life                          | 36        |
| Walk on By                            | 37        |
| Walk the Aisle                        | 38        |
| <b>Why our modular resilient LVT?</b> | <b>40</b> |
| <b>Specifications</b>                 | <b>44</b> |

# Brushed Lines

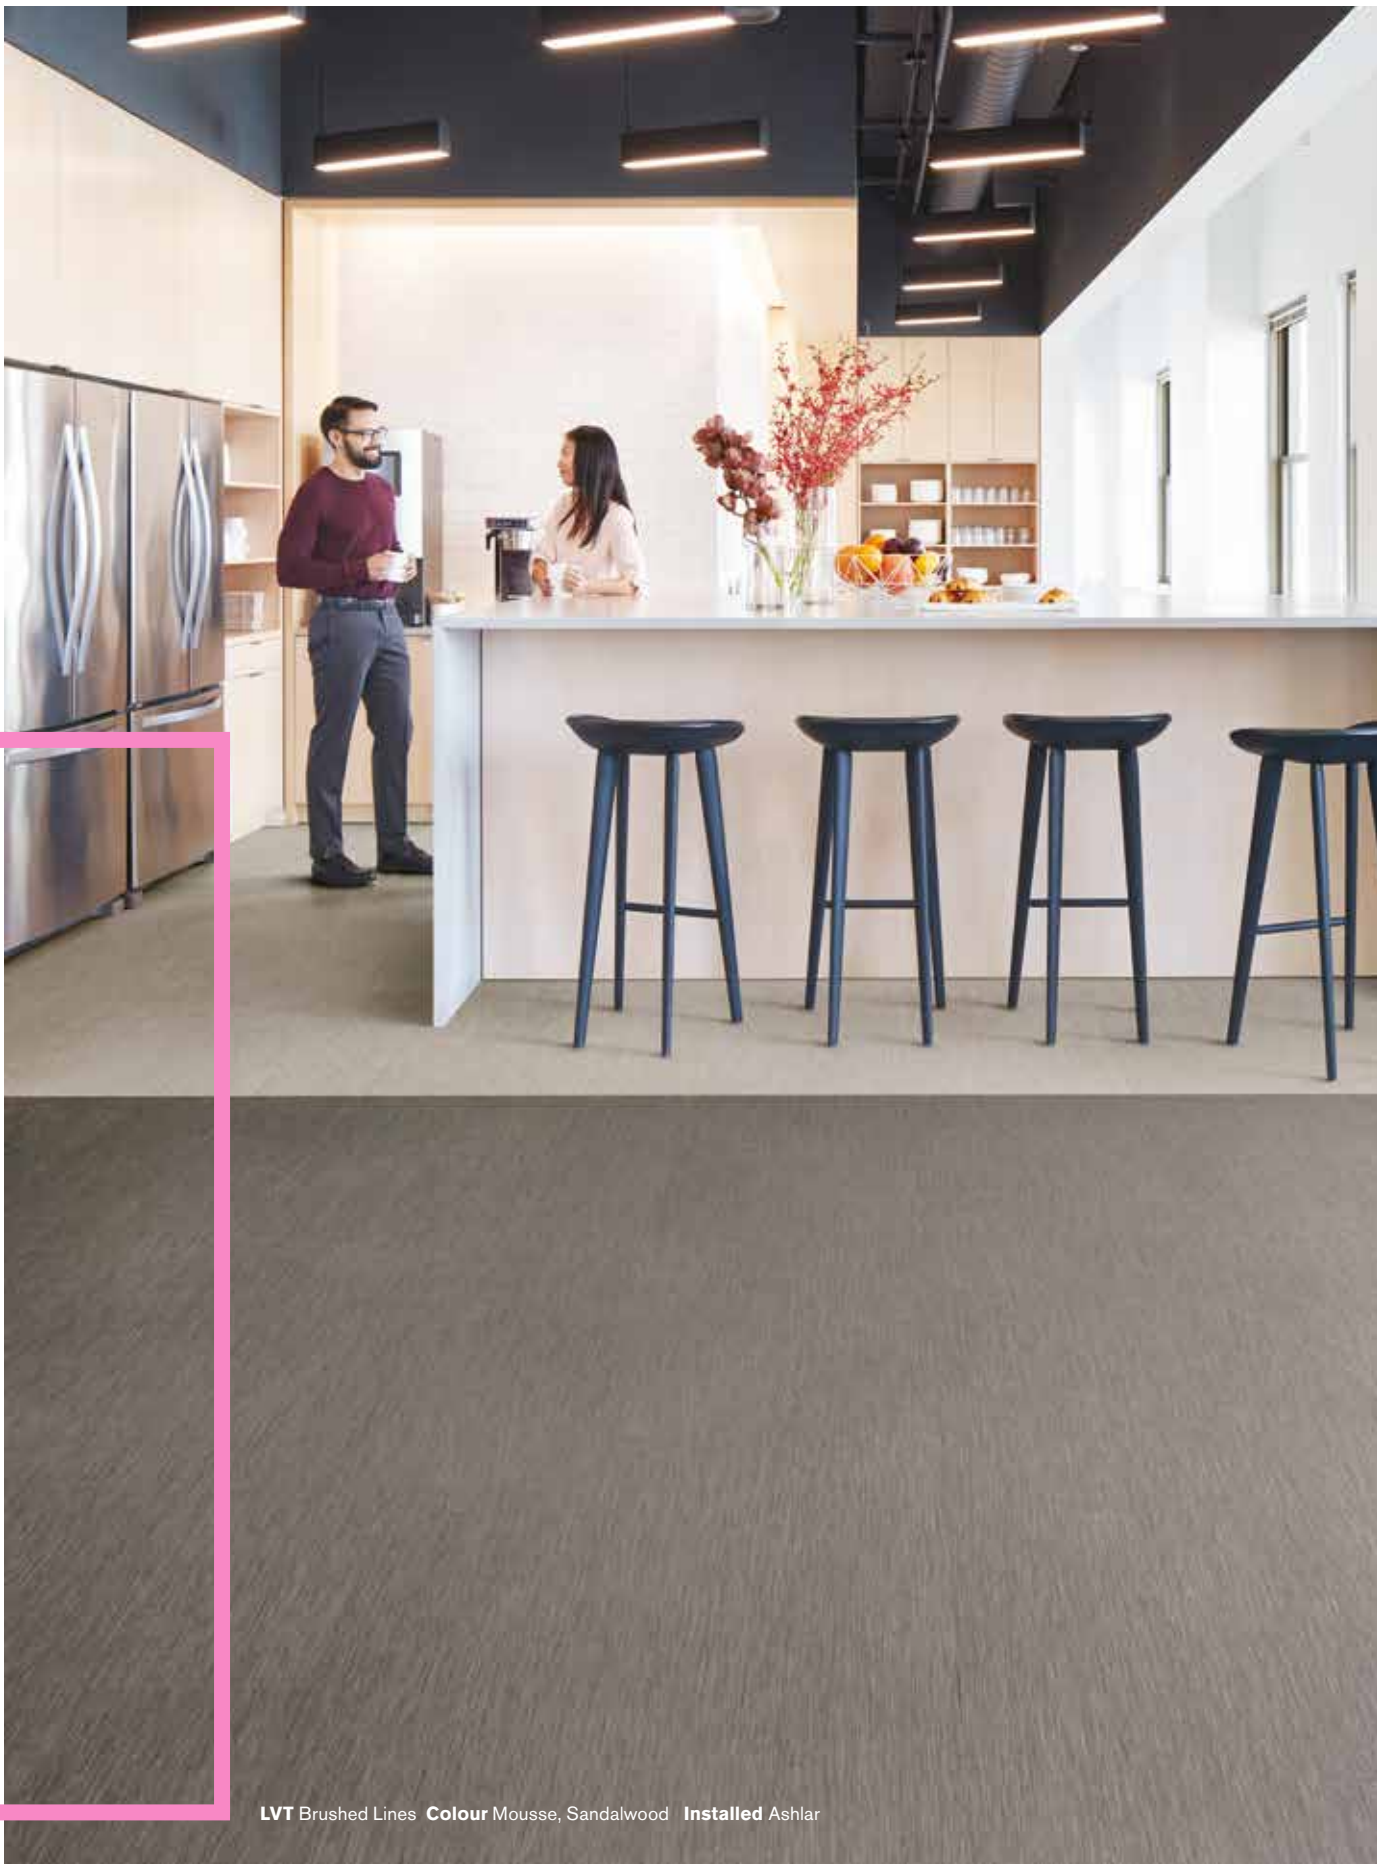

LVT Brushed Lines Colour Mousse, Sandalwood Installed Ashlar

## Modern Refinement

In industrial spaces we find traces of the natural world. Worn edges. Organic forms. Dusty colours.

Brushed Lines has a diffused linear texture. It evokes the familiar qualities of hard surfaces, with a light-capturing quality that sparkles on the floor. Its subtle design features solid colours ranging from warm and cool neutrals to pops of earthy, mineral-like tones. Brushed Lines delivers modern refinement inspired by raw and natural motifs.



LVT Brushed Lines Colour Alabaster, Rouge Installed Ashlar


# Brushed Lines



A016-01 TALC



A016-02 ALABASTER



A016-03 MIST



A016-04 GALENA



A016-05 GRAPHITE



A016-06 KOHL



A016-07 POWDER



A016-08 SANDALWOOD



A016-09 PARAFFIN



A016-10 BISQUE



A016-11 MOUSSE



A016-12 SOFT SHADOW



A016-13 BLUSH



A016-14 HONEY



A016-15 HENNA



A016-16 ROUGE



A016-17 DEW



A016-18 CELADON



A016-19 EUCALYPTUS



A016-20 TEAL OXIDE



A016-21 ARBELLA



A016-22 DEEP COBALT

## Drawn Lines

### Inspired by natural fractal patterns

Fractals are repeating patterns at different scales and nature's favourite pattern-making method. Similarly, Drawn Lines LVT layers filament-fine marks in varying weights and rhythms, creating a never-ending geometric pattern and a soft pooling of light and dark areas with no visible repeats. Drawn Lines is available in a palette of 10 colours, from warm to cool, with a thread of metallic adding shimmer and depth.



LVT Drawn Lines Colour Aquamarine, Onyx Installed Ashlar

LVT Drawn Lines Colour Smokey Quartz, Diamond Installed Ashlar



## Drawn Lines



A009-10 OPAL



A009-09 DIAMOND



A009-02 TOPAZ



A009-08 SILVER



A009-03 BRONZE



A009-07 ONYX



A009-04 SMOKEY QUARTZ



A009-11 AMETHYST




A009-05 AMBER



A009-06 AQUAMARINE

# Level Set® Collection

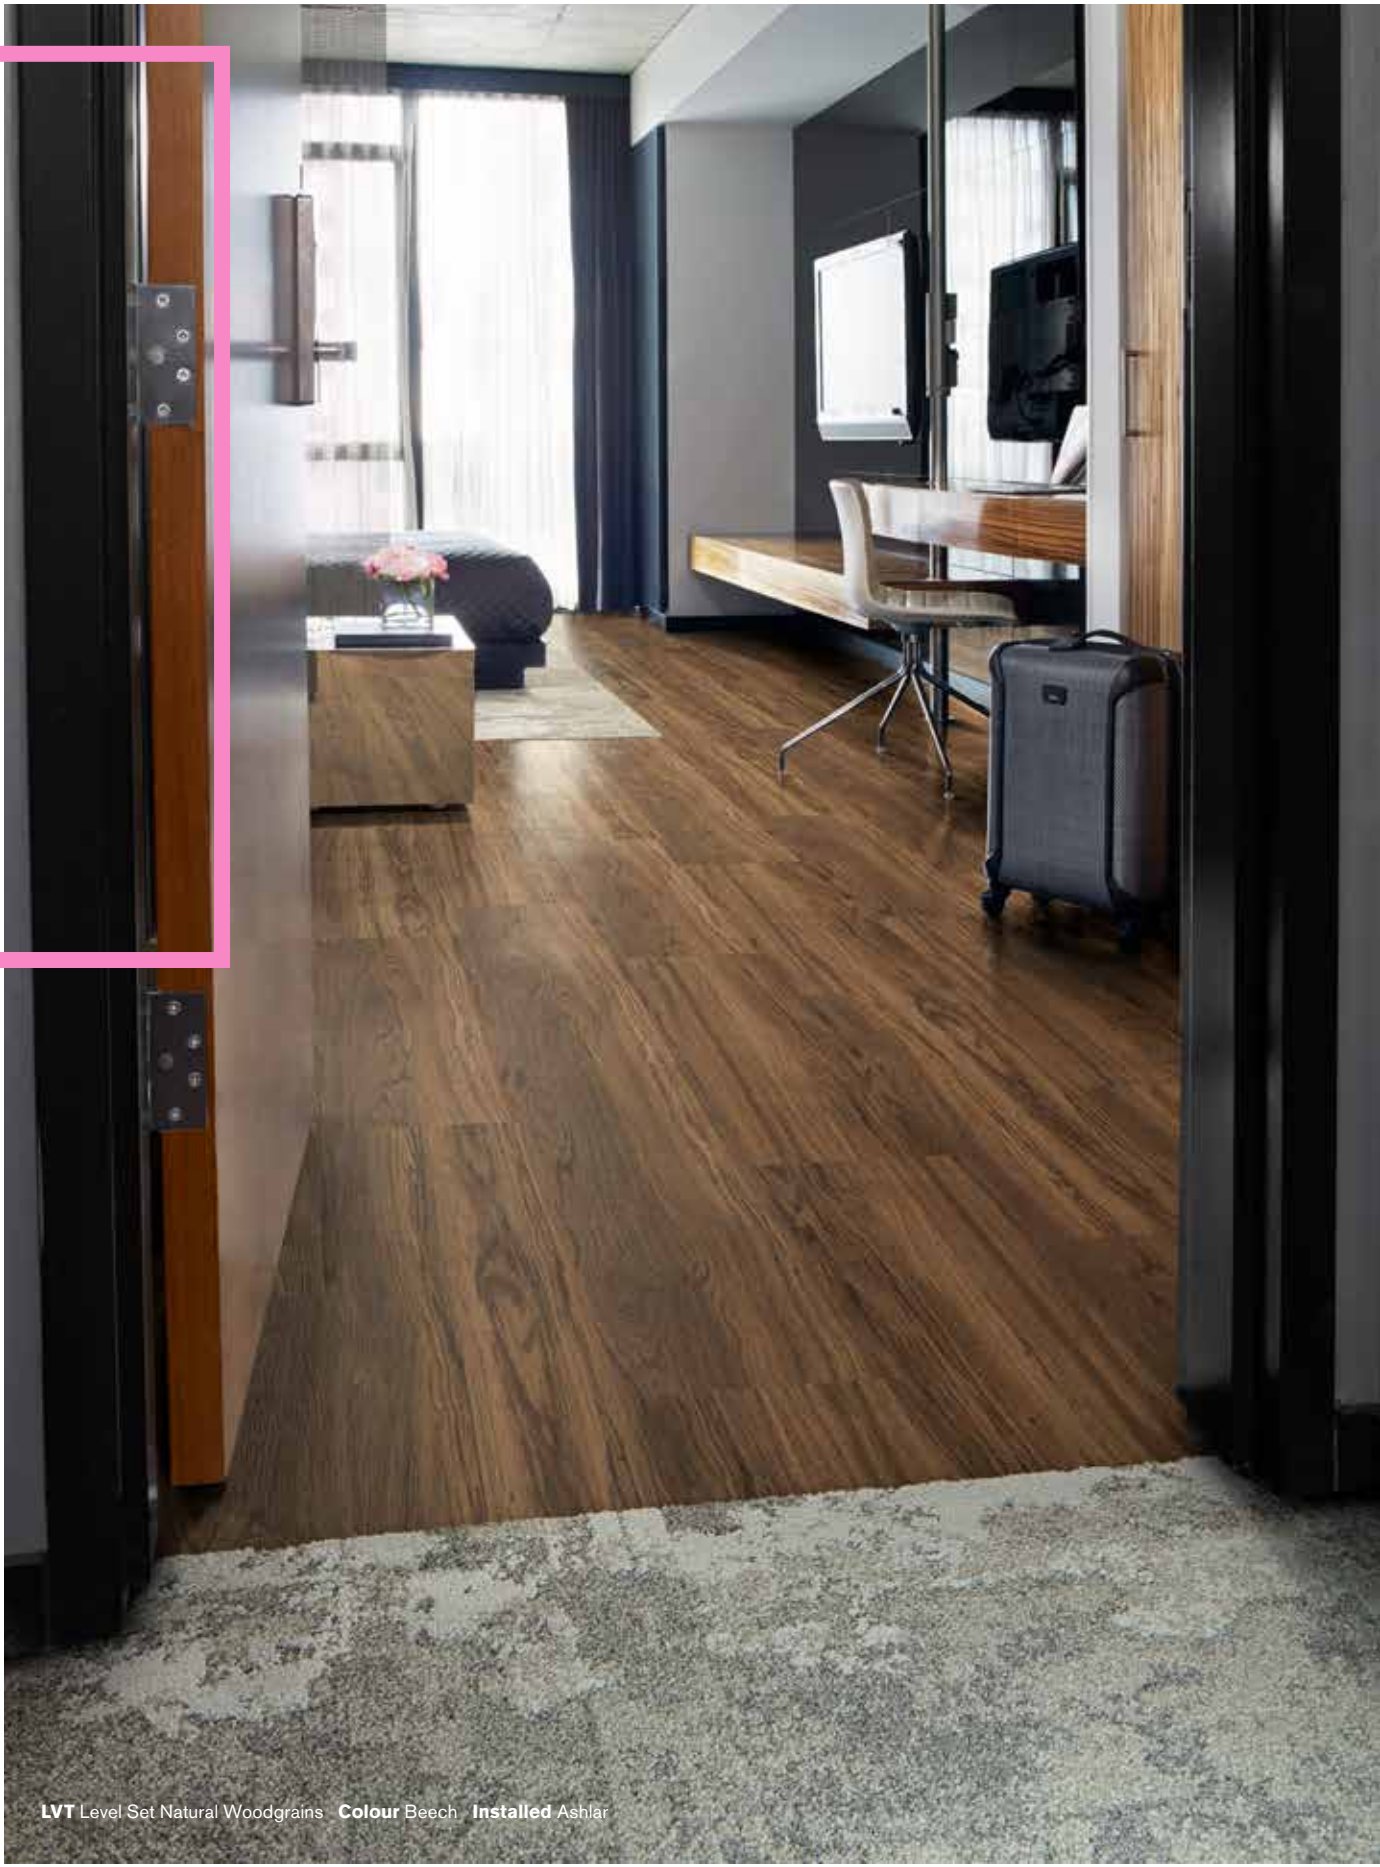

LVT Level Set Natural Woodgrains Colour Beech Installed Ashlar

## The perfect compliment

The Level Set Collection features 4 types of patterns in a total of 31 colourways: Natural and Textured Woodgrains in the 25 x 100 cm Skinny Planks format, and Natural and Textured Stones and Pattern in the 50 x 50 cm square format. The look and feel of the wood patterns ranges from glossy to distressed, while the stone patterns fill the spectrum from subdued to outspoken. Hard and soft tiles come together to create beautiful design options, creating a new world of integrated flooring choices that make contemporary interiors come to life.



LVT Level Set Textured Stones Colour Distressed Concrete Installed Non Directional



A001-01 JET MIST



A001-02 MARONE DARK MARBLE



A001-03 COOL IMPALA MARBLE

## Level Set® Collection Natural Stones



## Level Set® Collection Textured Stones



A003-01 POLISHED CEMENT




A003-02 COOL POLISHED CEMENT



A003-03 WARM POLISHED CEMENT



A003-09 MEDIUM CONCRETE



A003-08 LIGHT CONCRETE



A003-11 DISTRESSED CONCRETE



A003-10 DARK CONCRETE



A002-01 BLACK WALNUT



A002-02 MADAGASCAR



A002-03 CHESTNUT



A002-04 BEECH



A002-05 STORM



A002-06 WINTER GREY



A002-08 SAND DUNE



A002-11 WASHED MAPLE



A002-12 CEDAR

Level Set® Collection  
Natural Woodgrains





LVT Level Set Textured Woodgrains Colour Grey Dune Installed Ashlar

# Level Set® Collection Textured Woodgrains



A004-01 DISTRESSED WALNUT



A004-03 DISTRESSED HICKORY



A004-05 GREY DUNE



A004-06 ANTIQUE LIGHT OAK



A004-07 WHITE WASH



A004-09 ASH WALNUT



A004-11 DARK WALNUT



A004-14 ANTIQUE MAPLE



A004-15 ANTIQUE OAK



A004-16 ANTIQUE DARK OAK



A004-17 SILVER DUNE



A004-18 CHARCOAL DUNE



A004-19 ANTIQUE ASH OAK

## Studio Set

### Colour your space

Studio Set is a collection that's all about colour. You have 13 shades to choose from – ranging from intense, vibrant brights to soft, versatile neutral tones. A very subtle wood-grain pattern gives depth, but it's the colours everyone will notice. Use them in combination to create different compositions. Or make one bold choice across an entire area.



LVT Studio Set **Colour Slate** Installed Ashlar

LVT Studio Set **Colour Pepper** Installed Ashlar



A007-01 SILVERLIGHT



A007-02 PEWTER



A007-03 PEPPER



A007-04 ESPRESSO



A007-05 TITANIUM



A007-06 MUSHROOM



A007-07 LIME



A007-08 IRIS



A007-09 OCEAN



A007-10 POPPY



A007-11 MANDARIN



A007-12 MARIGOLD



A007-13 SLATE

## Studio Set



LVT Studio Set Colour Mushroom, Slate Installed Design by Tile

## Look Both Ways™ Collection

### Purity and playfulness

Look Both Ways is a collection of LVT and carpet tile patterns combining Zen-like purity with playfulness. Marrying purpose and function with your intention, these styles create landscapes that perform and delight in infinite ways.

Walk of Life, the bedrock of the LVT collection, is gritty, not polished. Sharing the same urban grey palette, Walk the Aisle sparkles with a luminescent fleck that energizes the surface. Walk About appears carved in ways that conjure pattern-love from the 1920s, 1980s, and today. And finally Walk on By is a vision of pure joy in brights & neutrals. Step, walk or run, but definitely look both ways for design inspiration.




LVT Walk the Aisle Colour Cool Ash Installed Monolithic


LVT Walk About Colour Pumice Installed Brick



A014-01 WARM ASH



A014-02 PUMICE



A014-03 COOL ASH



A014-04 CARBON

Walk About



# Walk of Life



LVT Walk of Life, Colour Cool Ash  
LVT Walk About, Colour Cool Ash  
Installed Design by Tile



A012-01 WARM ASH



A012-02 PUMICE




A012-03 COOL ASH



A012-04 CARBON



A012-05 CHARCOAL

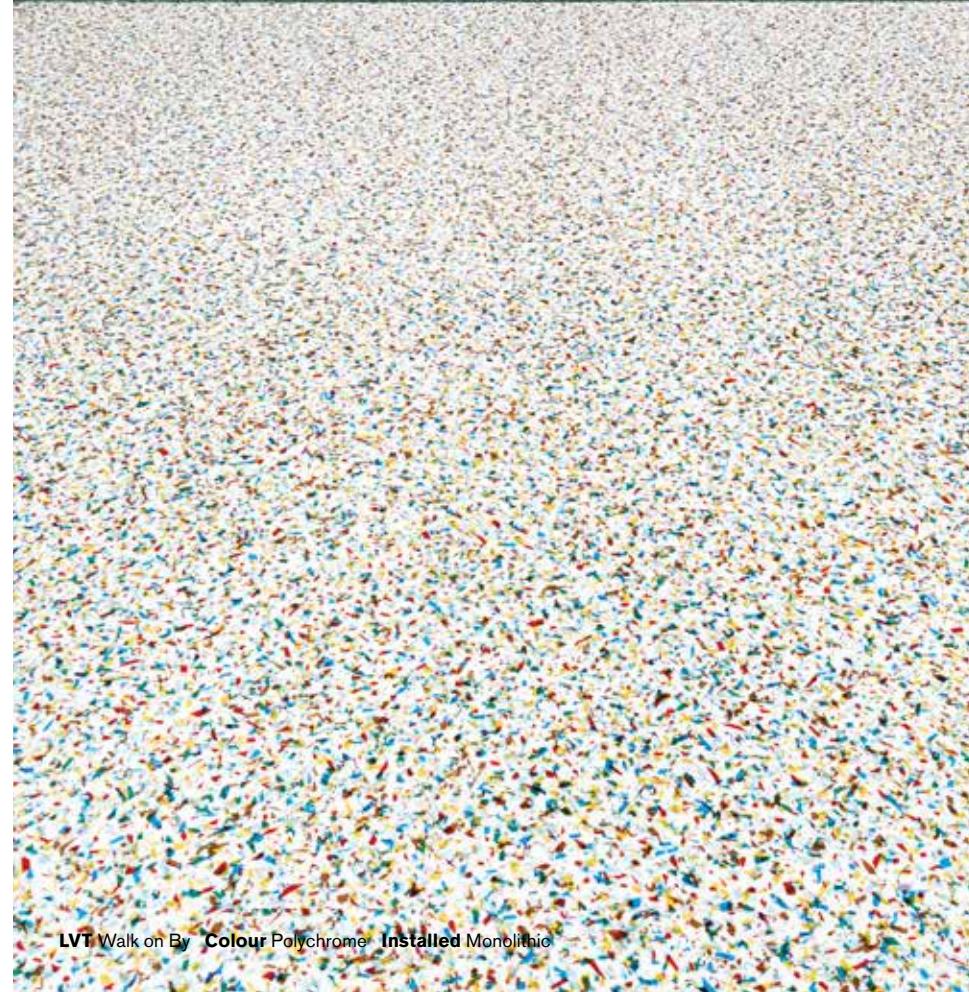

LVT Walk on By, Colour Polychrome, Installed Monolithic

# Walk on By




A015-01 POLYCHROME




A015-02 MONOCHROME

Walk the Aisle




A013-01 WARM ASH




A013-02 PUMICE



A013-03 COOL ASH



A013-04 CARBON

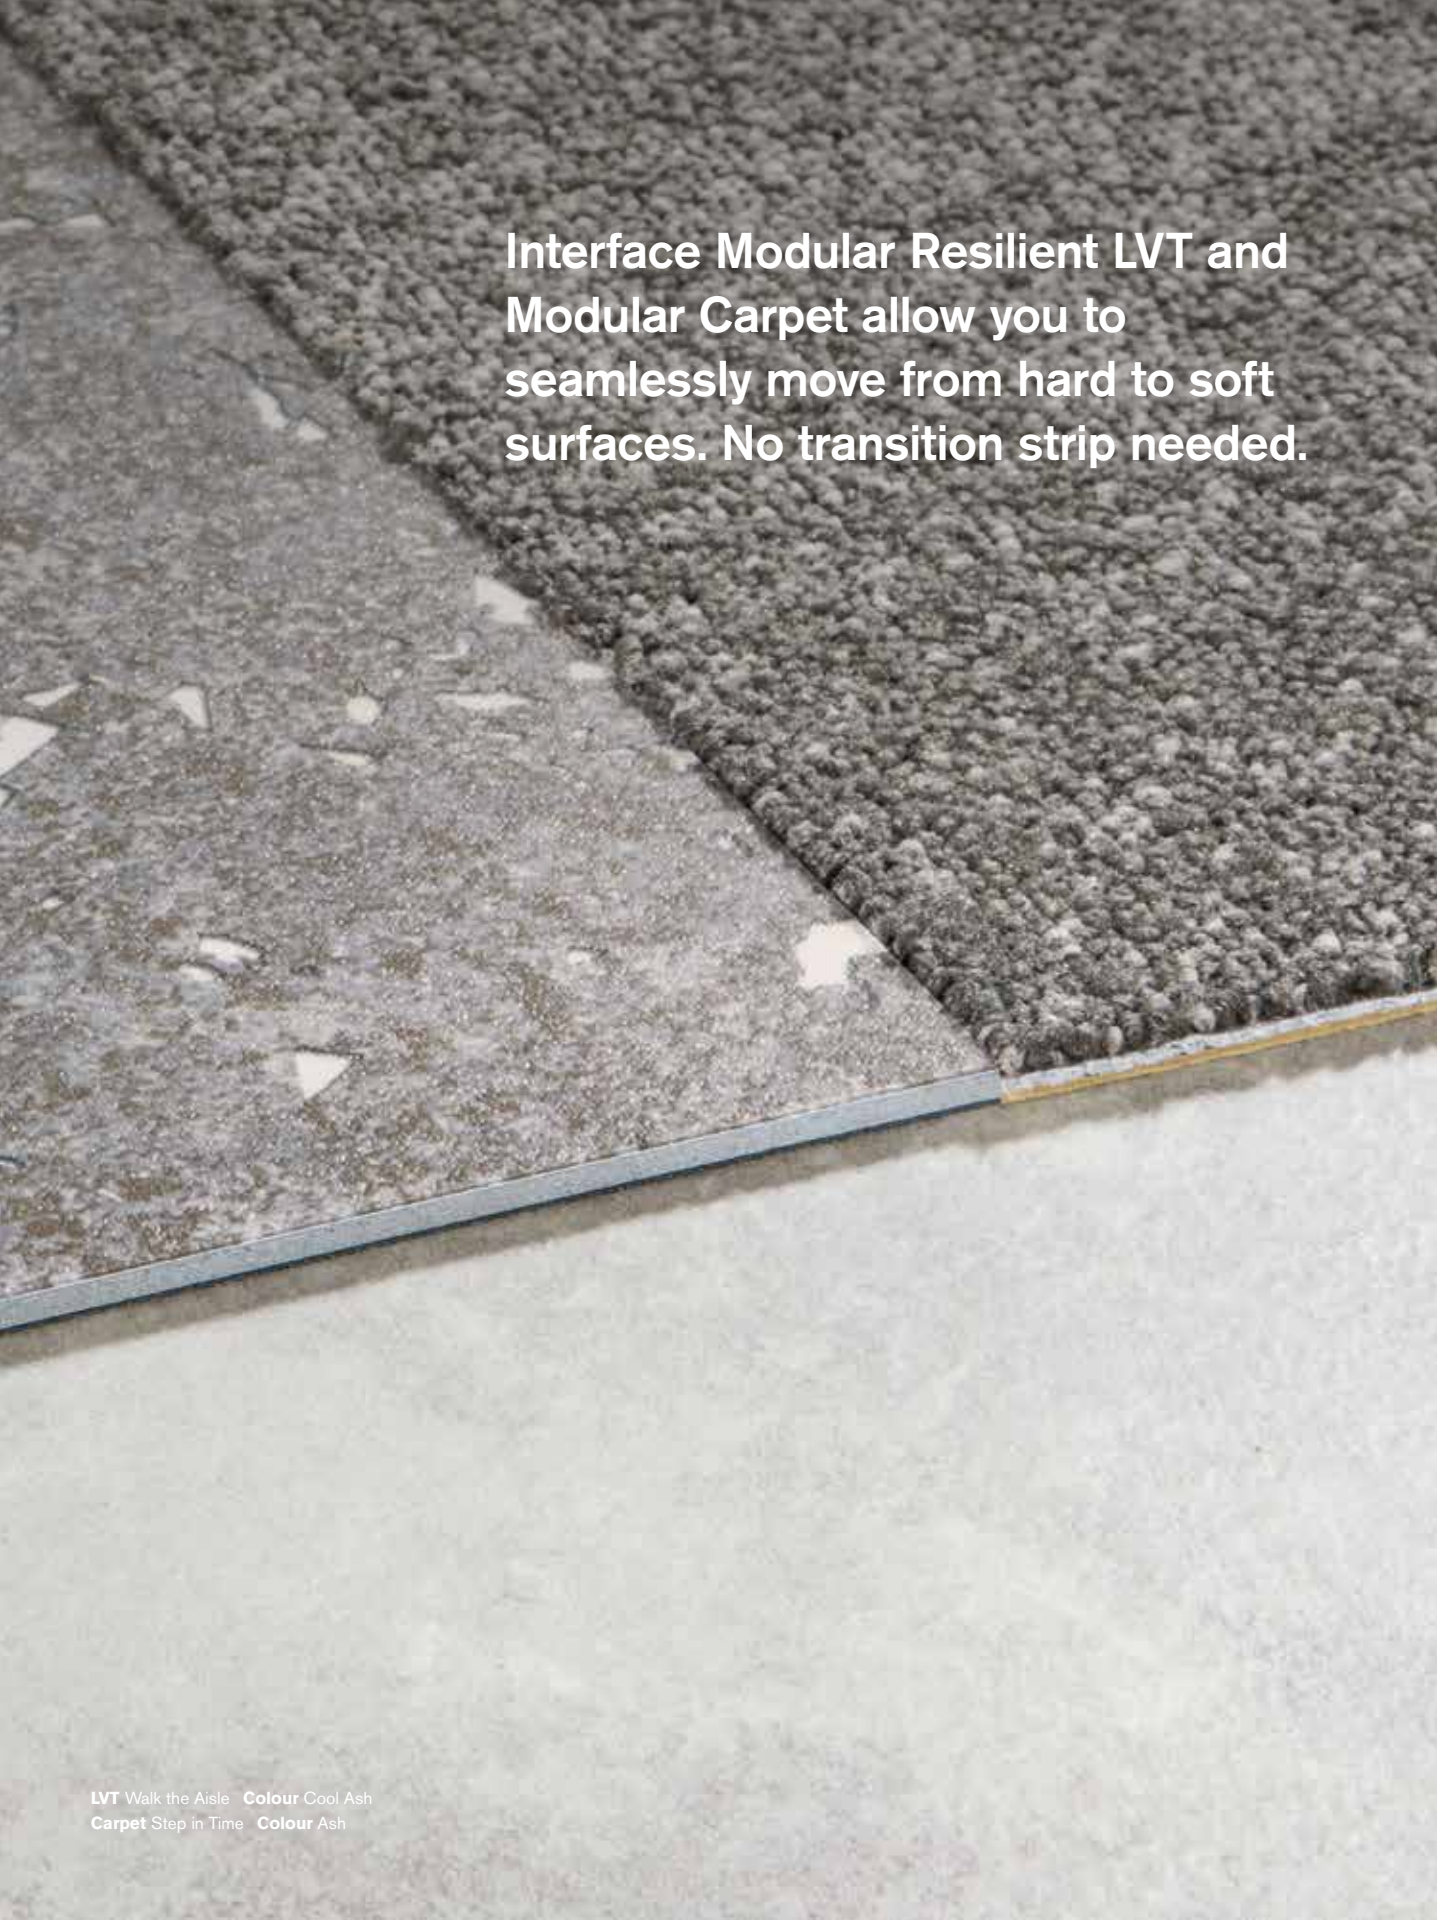

Interface Modular Resilient LVT and Modular Carpet allow you to seamlessly move from hard to soft surfaces. No transition strip needed.

## Why Our Modular Resilient LVT?

### Integrated System.

Say goodbye to transition strips and doubling up. Our modular resilient floorings are made to work as a system with our modular carpet tile. The compatible size and height of our products allows you to integrate modular carpet for an inset rug or an adjacent field – no transition strip required. You'll avoid doubling up on materials and save cost.

### Real Flexibility.

Create a unique look that lasts. Interface modular resilient LVT makes it easy to extend the life of your floor. From simple maintenance like damp mopping to selectively replacing damaged tiles, your flooring investment will stand the test of time - beautifully and effortlessly.


### Circular System.

Keep flooring out of the landfill. Our modular resilient LVT is produced with a controlled material stream so it can be reclaimed and recycled through our ReEntry® program.

And all our LVT products contain 39% recycled content, and are carbon neutral across their full product life cycle.

### Noise Reduction.

Less distractions. Interface is helping create **+Positive spaces™** with our LVT with Sound Choice™ backing, offering you best-in-class performance for reduced impact sound and floor to floor sound transmission.

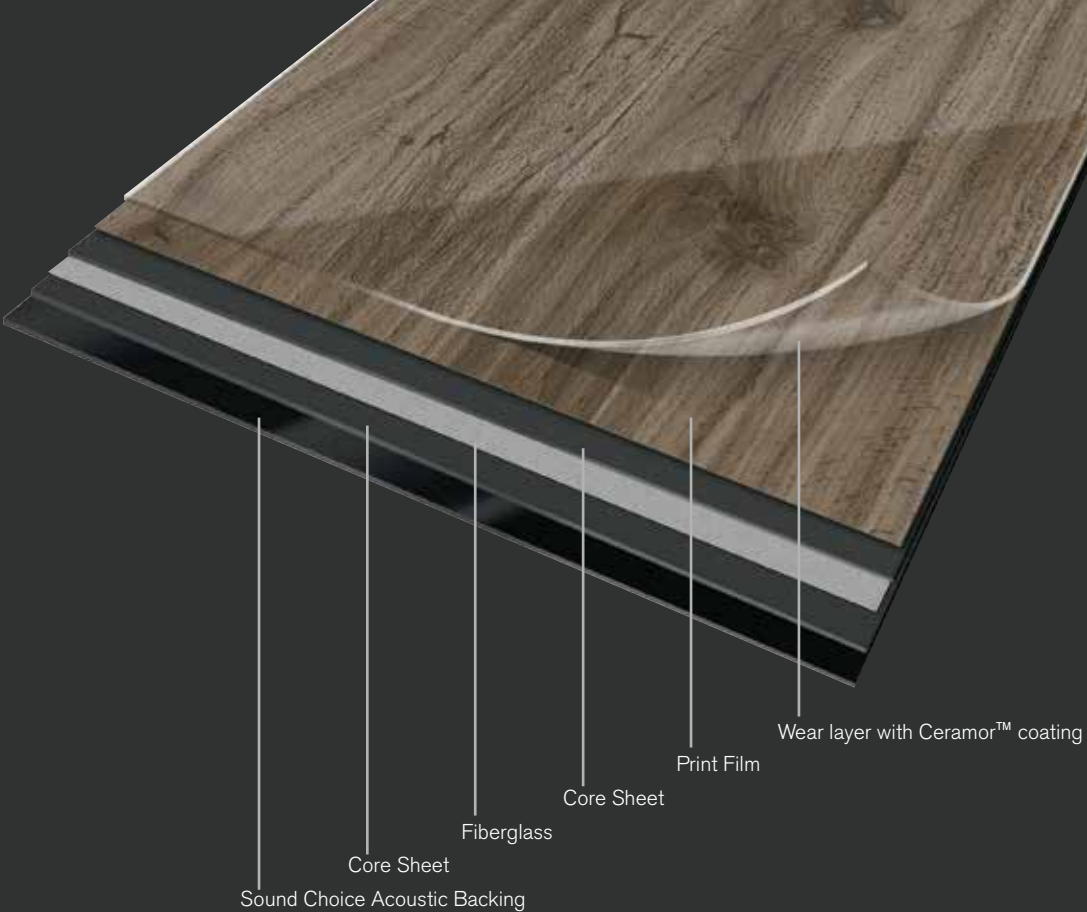

## High Performance from Top to Bottom.

From our Ceramor™ Top Coat to our Sound Choice™ backing, we've designed our modular resilient LVT to provide peak performance in even the most challenging work environment while also providing superior sound absorption.

**Abrasion Resistance.** Our Ceramor ceramic bead coating provides a durable finish that resists scratching and scuffing so your floors look better longer. Embossing adds texture to further enhance durability.

**A Strong Core.** Incorporating a fiberglass layer between two core sheets provides optimal dimensional stability and flexibility, allowing for a fully modular installation and the ability to move and update with ease.

**Quiet Comfort.** With an IIC rating of 57 our Sound Choice backing provides superior protection against vertical sound transfer. Minimizing noise enhances workplace productivity and creates more usable, comfortable spaces.



- A016
- Brushed Lines
- A009
- Drawn Lines
- A002
- Level Set® Collection Natural Woodgrains
- A004
- Level Set® Collection Textured Woodgrains
- A007
- Studio Set

|                                 |                                                                                |
|---------------------------------|--------------------------------------------------------------------------------|
| Product Construction            | High Performance Luxury Vinyl Tile                                             |
| Wear Layer Thickness            | 0.55 mm                                                                        |
| Total Thickness (Metric)        | 4.5 mm                                                                         |
| Classification                  | EN 651 Class 33 (heavy contract)<br>EN 651 Class 42 (light industrial general) |
| Acoustic Impact Noise Reduction | ISO 140.8 $\Delta L_w$ = 16dB                                                  |
| Finish                          | CERAMOR™ UV Stabilized Ceramic Bead Coating                                    |
| Nominal Dimensions              | 25cm x 100cm                                                                   |

Performance Specifications


|                         |                    |                        |
|-------------------------|--------------------|------------------------|
| Critical Heat Flux      | AS ISO 9239-1      | >7kW/m²                |
| Smoke Rate              | AS ISO 9239-1      | <750%.min              |
| Size, Tolerance         | ISO 24342          | >400 mm < 0.35 mm      |
|                         | ISO 24342          | <400 mm < 0.25 mm      |
| Dimensional Stability   | ISO 23999          | <0.25%                 |
| Thickness               | ISO 24346          | Average value + 0.20mm |
| Resistance to Light     | ISO 105-B02        | ≥6                     |
| Resistance to Heat      | ASTM F1514         | $\Delta E$ < 8 avg Max |
| Resistance to Chemicals | EN-ISO 26987       | Pass                   |
| Reaction to Fire        | EN ISO 13501-1     | Class BFI-S1           |
| VOC Test                | ISO 10580          | Pass                   |
| Flexibility             | ISO 24344 Method A | Pass                   |
| Static Load             | ASTM F970          | ≤0.005" with 1500 psi  |
| Castor chair            | ISO 4918           | Pass                   |
| Thermal Conductivity    | EN 12667           | 0.16 W/mK              |
| Static Electrical       | EN 1815            | <2kV                   |
| Slip Resistance         | AS 4586:2014       | R10                    |

Environmental Specifications

|                                    |                                                              |
|------------------------------------|--------------------------------------------------------------|
| Ingredients and Life Cycle Impacts | EPD for LVT                                                  |
| Sustainability Assessment          | NSF/ANSI 332, Meets Certification Guidelines                 |
| LEED v4                            | Contributes to IEQ: Low Emitting Materials; M&R: EPD and EPR |
| End of Life                        | Fully Recyclable to carpet tile Backing Recycling            |

Technical Information

|                      |                                                  |
|----------------------|--------------------------------------------------|
| Installation         | See Interface LVT Installation Guidelines online |
| Maintenance          | See Interface LVT Maintenance Guidelines online  |
| Reclamation          | View details on our ReEntry® Program             |
| Warranty             | 15 Year Standard LVT Product Warranty            |
| Installation Methods | Ashlar, Herringbone                              |



ASHLAR

HERRINGBONE



GreenRating Level A

trust brands™

- A001
- Level Set® Collection Natural Stones
- A003
- Level Set® Collection Textured Stones
- A014
- Walk About
- A012
- Walk of Life
- A015
- Walk on By
- A013
- Walk the Aisle

|                                 |                                                                                |
|---------------------------------|--------------------------------------------------------------------------------|
| Product Construction            | High Performance Luxury Vinyl Tile                                             |
| Wear Layer Thickness            | 0.55 mm                                                                        |
| Total Thickness (Metric)        | 4.5 mm                                                                         |
| Classification                  | EN 651 Class 33 (heavy contract)<br>EN 651 Class 42 (light industrial general) |
| Acoustic Impact Noise Reduction | ISO 140.8 $\Delta L_w$ = 16dB                                                  |
| Finish                          | CERAMOR™ UV Stabilized Ceramic Bead Coating                                    |
| Nominal Dimensions              | 50cm x 50cm                                                                    |

Performance Specifications


|                         |                    |                        |
|-------------------------|--------------------|------------------------|
| Critical Heat Flux      | AS ISO 9239-1      | >7kW/m²                |
| Smoke Rate              | AS ISO 9239-1      | <750%.min              |
| Size, Tolerance         | ISO 24342          | >400 mm < 0.35 mm      |
|                         | ISO 24342          | <400 mm < 0.25 mm      |
| Dimensional Stability   | ISO 23999          | <0.25%                 |
| Thickness               | ISO 24346          | Average value + 0.20mm |
| Resistance to Light     | ISO 105-B02        | ≥6                     |
| Resistance to Heat      | ASTM F1514         | $\Delta E$ < 8 avg Max |
| Resistance to Chemicals | EN-ISO 26987       | Pass                   |
| Reaction to Fire        | EN ISO 13501-1     | Class BFI-S1           |
| VOC Test                | ISO 10580          | Pass                   |
| Flexibility             | ISO 24344 Method A | Pass                   |
| Static Load             | ASTM F970          | ≤0.005" with 1500 psi  |
| Castor chair            | ISO 4918           | Pass                   |
| Thermal Conductivity    | EN 12667           | 0.16 W/mK              |
| Static Electrical       | EN 1815            | <2kV                   |
| Slip Resistance         | AS 4586:2014       | R10                    |

Environmental Specifications

|                                    |                                                              |
|------------------------------------|--------------------------------------------------------------|
| Ingredients and Life Cycle Impacts | EPD for LVT                                                  |
| Sustainability Assessment          | NSF/ANSI 332, Meets Certification Guidelines                 |
| LEED v4                            | Contributes to IEQ: Low Emitting Materials; M&R: EPD and EPR |
| End of Life                        | Fully Recyclable to carpet tile Backing Recycling            |

Technical Information

|                      |                                                          |
|----------------------|----------------------------------------------------------|
| Installation         | See Interface LVT Installation Guidelines online         |
| Maintenance          | See Interface LVT Maintenance Guidelines online          |
| Reclamation          | View details on our ReEntry® Program                     |
| Warranty             | 15 Year Standard LVT Product Warranty                    |
| Installation Methods | Ashlar, Brick, Monolithic, Quarter-Turn, Non Directional |



ASHLAR

BRICK

MONOLITHIC

QUARTER-TURN

NON DIRECTIONAL



GreenRating Level A

trust brands™

All product specifications reflect averages derived from product sample testing, are subject to normal manufacturing and testing tolerances and inherent pattern variances, and may be changed without notice. For more information about these and other important attributes of the product(s) described herein, including recycled content and product warranty information please see our full LVT product disclaimer.



**Carbon Neutral Floors™**

**Visit [interface.com/hospitality](https://interface.com/hospitality)  
to find more collections**

## **Our Asia Pacific Offices**

### **Australia**

Interface Australia  
local toll free: 1800 804 361

### **India**

Interface India  
tel: +91 80 4613 1313

### **South East Asia**

Interface Asia  
tel: +65 6478 1510

### **South Korea**

Interface South Korea  
tel: +82 2 555 1734

### **Japan**

Interface Japan  
tel: +81 3 5733 5211

### **Beijing**

Interface China  
tel: +86 10 6590 7810

### **Hong Kong**

Interface China  
tel: +852 2802 0838

### **Shanghai**

Interface China  
tel: +86 21 6340 3868

