

Interface®

\$ \$



QuickShip.
In time.
In budget.
Whatever your space.

QuickShip

QuickShip. In time. In budget. Whatever your space.

With our QuickShip offering, you're no longer forced to sacrifice style for quick turnaround times. We're offering a wide selection of some of our best-loved flooring options with a promise to dispatch them from our factory within 5 working days, to suit your budget and space.

QuickShip \$\$ offering includes 50 modular carpet tile and 27 LVT options, all selected to provide you with simple yet striking design ideas, mixing colour, pattern and texture to help you create **+Positive spaces™**.

+Positive spaces™ Better products. Happier people. Healthier planet.

Find more ideas and browse the full QuickShip offering at www.interface.com/quickship



Product AE310 Colour Greige Installed Non Directional


AE310™ Colourline



7921-005-000 Greige
GlasBac®



7921-007-000 Smoke
GlasBac®

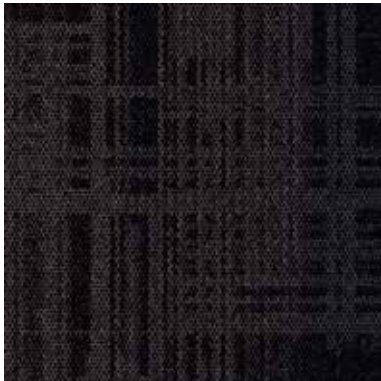

7921-008-000 Ink
GlasBac®

Specifications

Style Code	7921 Pattern 000
Product Definition	Tufted Textured Loop
Yarn/Fibre	100% Recycled Solution Dyed Nylon
Machine Gauge	1/12
Pile Thickness	2.5mm +/- 0.5mm
Total Thickness	6.5mm +/- 0.5mm
Tile Size	50x50cm
Area of Use	Commercial – General Use
Lifetime Antimicrobial	Intersept®
Soil/Stain Protection	Protekt2®
Installation Methods	Non Directional



NON DIRECTIONAL



AE311™ Colourline



7922-005-000 Greige

GlasBac®



7922-006-000 Iron

GlasBac®



7922-007-000 Smoke

GlasBac®



7922-018-000 Granite

GlasBac®

Specifications

Style Code	7922 Pattern 000
Product Definition	Tufted Textured Loop
Yarn/Fibre	100% Recycled Solution Dyed Nylon
Machine Gauge	1/12
Pile Thickness	2.5mm +/- 0.5mm
Total Thickness	6.5mm +/- 0.5mm
Tile Size	25x100cm
Area of Use	Commercial – Heavy Use
Lifetime Antimicrobial	Intersept®
Soil/Stain Protection	Protekt ² ®
Installation Methods	Ashlar, Herringbone



Product AE311 Colour Smoke Installed Ashlar



Product AE311 Colour Granite Product AE315 Colour Granite/Azure Product AE317 Colour Azure Installed Ashlar



Product AE311 Colour Iron Product AE315 Colour Iron/Berry Product AE317 Colour Berry Installed Herringbone

AE315™ Colourline

Specifications



9209-006-000 Iron/Berry


GlasBac®



9209-009-000 Granite/Azure

GlasBac®

Style Code	9209 Pattern 000
Product Definition	Tufted Textured Loop
Yarn/Fibre	100% Recycled Solution Dyed Nylon
Machine Gauge	1/12
Pile Thickness	2.5mm +/- 0.5mm
Total Thickness	6.0mm +/- 0.5mm
Tile Size	25x100cm
Area of Use	Commercial – HeavyUse
Lifetime Antimicrobial	Intersept®
Soil/Stain Protection	Protekt2®
Installation Methods	Ashlar, Herringbone



AE317™ Colourline

Specifications



9210-006-000 Berry

GlasBac®



9210-009-000 Azure

GlasBac®

Style Code	9210 Pattern 000
Product Definition	Tufted Textured Loop
Yarn/Fibre	100% Recycled Solution Dyed Nylon
Machine Gauge	1/12
Pile Thickness	2.5mm +/- 0.5mm
Total Thickness	6.0mm +/- 0.5mm
Tile Size	25x100cm
Area of Use	Commercial – HeavyUse
Lifetime Antimicrobial	Intersept®
Soil/Stain Protection	Protekt2®
Installation Methods	Ashlar, Herringbone





Product BP410 Colour Dove Installed Ashlar



Product BP410 Colour Licorice Product BP411 Colour Licorice/Teal Installed Ashlar

BP410™ Colourline

Specifications




7928-005-000 Licorice
GlasBac®




7928-006-000 Dove
GlasBac®

Style Code	7928 Pattern 000
Product Definition	Tufted Textured Loop
Yarn/Fibre	100% Solution Dyed Nylon
Machine Gauge	1/12
Pile Thickness	2.0mm +/- 0.5mm
Total Thickness	5.5mm +/- 0.5mm
Tile Size	25x100cm
Area of Use	Commercial – Heavy Use
Lifetime Antimicrobial	Intersept®
Soil/Stain Protection	Protekt2®
Installation Methods	Ashlar, Herringbone




BP411™ Colourline

Specifications

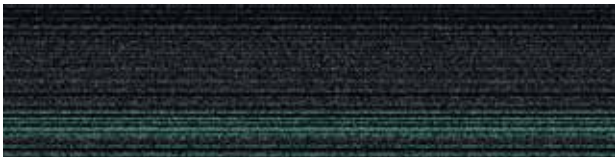


7929-005-000 Licorice/Teal
GlasBac®

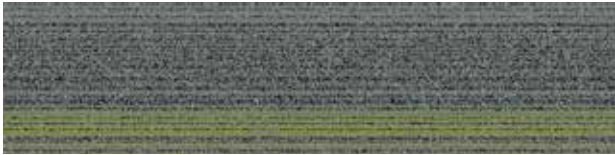

7929-006-000 Dove/Lime
GlasBac®

Style Code	7929 Pattern 000
Product Definition	Tufted Textured Loop
Yarn/Fibre	100% Solution Dyed Nylon
Machine Gauge	1/12
Pile Thickness	2.0mm +/- 0.5mm
Total Thickness	5.5mm +/- 0.5mm
Tile Size	25x100cm
Area of Use	Commercial – Heavy Use
Lifetime Antimicrobial	Intersept®
Soil/Stain Protection	Protekt2®
Installation Methods	Ashlar, Herringbone






Product Building Blocks **Colour** Iron **Installed** Quarter-Turn



Product Cubic **Colour** Dimension **Product** Cubic Colours **Colour** Blue Lagoon **Installed** Non Directional

Building Blocks™ Colourline

Specifications

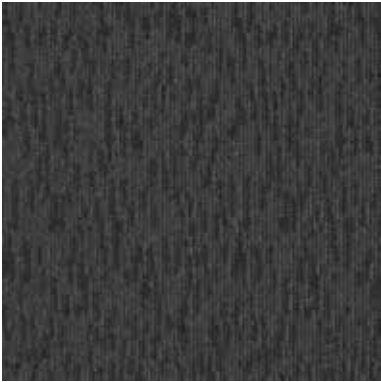

1107-004-000 Iron

GlasBac®


Style Code	1107 Pattern 000
Product Definition	Tufted Textured Loop
Yarn/Fibre	100% Solution Dyed Nylon
Machine Gauge	1/10
Pile Thickness	4.0mm +/- 0.5mm
Total Thickness	6.5mm +/- 0.5mm
Tile Size	50x50cm
Area of Use	Commercial – Heavy Use
Lifetime Antimicrobial	Intersept®
Soil/Stain Protection	Protekt2®
Installation Methods	Quarter-Turn



QUARTER-TURN

Cubic™ Colourline

Specifications

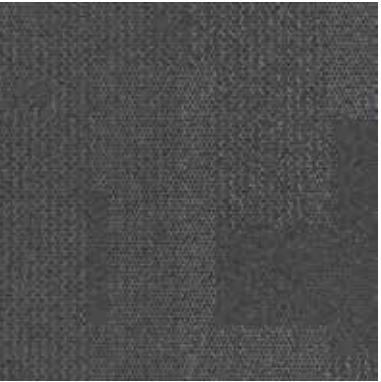

1151-010-000 Dimension

GlasBac® and CushionBac™ RE

Style Code	1151 Pattern 000
Product Definition	Tufted Textured Loop
Yarn/Fibre	100% Recycled Solution Dyed Nylon
Machine Gauge	1/12
Pile Thickness	2.5mm +/- 0.5mm
Total Thickness (GlasBac®)	6.5mm +/- 0.5mm
Total Thickness (CushionBac™ RE)	9.7mm +/- 0.5mm
Tile Size	50x50cm
Area of Use	Commercial – Heavy Use
Lifetime Antimicrobial	Intersept®
Soil/Stain Protection	Protekt2®
Installation Methods	Non Directional



NON DIRECTIONAL



Composure™ Colourline



4169-002-000 Diffuse

GlasBac® and CushionBac™ RE



4169-003-000 Solitude

GlasBac® and CushionBac™ RE



4169-006-000 Seclusion

GlasBac®

Specifications

Style Code	4169 Pattern 000
Product Definition	Tufted Textured Loop
Yarn/Fibre	100% Solution Dyed Nylon
Machine Gauge	1/12
Pile Thickness	2.0mm +/- 0.5mm
Total Thickness (GlasBac®)	6.5mm +/- 0.5mm
Total Thickness (CushionBac™ RE)	9.7mm +/- 0.5mm
Tile Size	50x50cm
Area of Use	Commercial – Heavy Use
Lifetime Antimicrobial	Intersept®
Soil/Stain Protection	Protekt ² ®
Installation Methods	Non Directional



NON DIRECTIONAL

Product Composure Colour Seclusion Installed Non Directional



Product Cubic **Colour** Dimension **Product** Cubic Colours **Colour** Yellow **Installed** Non Directional



Product East Coast **Colour** Current **Installed** Ashlar

Cubic Colours™ Colourline

Specifications



1153-002-000 Blue Lagoon

GlasBac®



1153-013-000 Yellow

GlasBac®

Style Code	1153 Pattern 000
Product Definition	Tufted Textured Loop
Yarn/Fibre	100% Recycled Solution Dyed Nylon
Machine Gauge	1/12
Pile Thickness	2.5mm +/- 0.5mm
Total Thickness	6.5mm +/- 0.5mm
Tile Size	50x50cm
Area of Use	Commercial – Heavy Use
Lifetime Antimicrobial	Intersept®
Soil/Stain Protection	Protekt ² ®
Installation Methods	Non Directional



NON DIRECTIONAL

East Coast™ Colourline

Specifications



2322-001-000 Current

CushionBac™ RE

Style Code	2322 Pattern 000
Product Definition	Tufted Textured Loop
Yarn/Fibre	100% Solution Dyed Nylon
Machine Gauge	1/12
Pile Thickness	2.5mm +/- 0.5mm
Total Thickness	8.7mm +/- 0.5mm
Tile Size	25x100cm
Area of Use	Commercial – Heavy Use
Lifetime Antimicrobial	Intersept®
Soil/Stain Protection	Protekt ² ®
Installation Methods	Ashlar, Herringbone



ASHLAR

HERRINGBONE



Product Equilibrium II Colour Static Installed Ashlar



Product Flow Colours Flux Installed Ashlar

Equilibrium II™ Colourline

Specifications



1191-013-000 Rotate


GlasBac®



1191-014-000 Static

GlasBac®

Style Code	1191 Pattern 000
Product Definition	Tufted Textured Loop
Yarn/Fibre	100% Recycled Solution Dyed Nylon
Machine Gauge	1/12
Pile Thickness	3.0mm +/- 0.5mm
Total Thickness	7.0mm +/- 0.5mm
Tile Size	50x50cm
Area of Use	Commercial – Heavy Use
Lifetime Antimicrobial	Intersept®
Soil/Stain Protection	Protekt2®
Installation Methods	Ashlar, Quarter-Turn



ASHLAR

QUARTER-TURN

Flow™ Colourline


Specifications



2052-001-000 Flux

CushionBac™ RE

Style Code	2052 Pattern 000
Product Definition	Tufted Textured Loop
Yarn/Fibre	100% Solution Dyed Nylon
Machine Gauge	1/12
Pile Thickness	3mm +/- 0.5mm
Total Thickness	9.2mm +/- 0.5mm
Tile Size	50x50cm
Area of Use	Commercial – General Use
Lifetime Antimicrobial	Intersept®
Soil/Stain Protection	Protekt2®
Installation Methods	Ashlar, Monolithic, Quarter-Turn



ASHLAR

MONOLITHIC

QUARTER-TURN



Harmonize™ Colourline

Specifications



7568-005-000 Gravel


GlasBac®



7568-009-000 Gull

GlasBac®

Style Code	7568 Pattern 000
Product Definition	Tufted Textured Loop
Yarn/Fibre	100% Recycled Solution Dyed Nylon
Machine Gauge	1/12
Pile Thickness	2.5mm +/- 0.5mm
Total Thickness	6.0mm +/- 0.5mm
Tile Size	25x100cm
Area of Use	Commercial – Heavy Use
Lifetime Antimicrobial	Intersept®
Soil/Stain Protection	Protekt2®
Installation Methods	Ashlar, Herringbone



Monochrome™ Colourline


Specifications



2026-020-000 Black

GlasBac®

Style Code	2026 Pattern 000
Product Definition	Tufted Textured Loop
Yarn/Fibre	100% Recycled Solution Dyed Nylon
Machine Gauge	1/12
Pile Thickness	3.0mm +/- 0.5mm
Total Thickness	7.0mm +/- 0.5mm
Tile Size	50x50cm
Area of Use	Commercial – Heavy Use
Lifetime Antimicrobial	Intersept®
Soil/Stain Protection	Protekt2®
Installation Methods	Quarter-Turn, Monolithic





Carpet Product On Line **Colour** Pewter
LVT Product Textured Woodgrains **Colour** Antique Light Oak **Installed** Herringbone

On Line™ Colourline



7335-005-000 Ink

GlasBac®



7335-006-000 Pewter

GlasBac®



7335-090-000 Berry

GlasBac®



7335-012-000 Lime

GlasBac®



7335-014-000 Poppy

GlasBac®



7335-016-000 Mandarin

GlasBac®



7335-023-000 Azure

GlasBac®

Specifications

Style Code	7335 Pattern 000
Product Definition	Tufted Textured Loop
Yarn/Fibre	100% Recycled Solution Dyed Nylon
Machine Gauge	1/12
Pile Thickness	3.0mm +/- 0.5mm
Total Thickness	6.5mm +/- 0.5mm
Tile Size	25x100cm
Area of Use	Commercial – Heavy Use
Lifetime Antimicrobial	Intersept®
Soil/Stain Protection	Protekt ² ®
Installation Methods	Ashlar, Herringbone





Product Reflex Colour Coal Installed Monolithic



Product Swing Colour Stroke Installed Monolithic

Reflex™ Colourline

Specifications



2014-001-000 Granite


CushionBac™ RE



2014-002-000 Coal

CushionBac™ RE

Style Code	2014 Pattern 000
Product Definition	Tufted Loop Pile
Yarn/Fibre	100% Solution Dyed Nylon
Machine Gauge	1/10
Pile Thickness	4.0 mm +/- 0.5mm
Total Thickness	9.7mm +/- 0.5mm
Tile Size	50x50cm
Area of Use	Commercial – Heavy Use
Lifetime Antimicrobial	Intersept®
Soil/Stain Protection	Protekt ^{2®}
Installation Methods	Monolithic, Quarter-Turn



Swing™ Colourline


Specifications



1589-010-000 Stroke

CushionBac™ RE

Style Code	1589 Pattern 000
Product Definition	Tufted Textured Loop
Yarn/Fibre	100% Solution Dyed Nylon
Machine Gauge	1/12
Pile Thickness	3mm +/- 0.5mm
Total Thickness	9.7mm +/- 0.5mm
Tile Size	50x50cm
Area of Use	Commercial – Heavy Use
Lifetime Antimicrobial	Intersept®
Soil/Stain Protection	Protekt ^{2®}
Installation Methods	Monolithic, Quarter-Turn





Velocity™ Colourline

Specifications



2013-001-000 Degree

GlasBac® and CushionBac™ RE

Style Code	2013 Pattern 000
Product Definition	Tufted Textured Loop
Yarn/Fibre	100% Recycled Solution Dyed Nylon
Machine Gauge	1/12
Pile Thickness	2.5mm +/- 0.5mm
Total Thickness (GlasBac®)	6.5mm +/- 0.5m
Total Thickness (CushionBac™ RE)	9.7mm +/- 0.5mm
Tile Size	50x50cm
Area of Use	Commercial – Heavy Use
Lifetime Antimicrobial	Intersept®
Soil/Stain Protection	Protekt ^{2®}
Installation Methods	Quarter-Turn



WW860™ Colourline

Specifications



8109-003-000 Charcoal Tweed

GlasBac®



8109-006-000 Natural Tweed

GlasBac®

Style Code	8109 Pattern 000
Product Definition	Tufted Textured Loop
Yarn/Fibre	100% Recycled Solution Dyed Nylon
Machine Gauge	Tapestry
Pile Thickness	2.5mm +/- 0.5mm
Total Thickness	6.0mm +/- 0.5mm
Tile Size	25x100cm
Area of Use	Commercial – Heavy Use
Lifetime Antimicrobial	Intersept®
Soil/Stain Protection	Protekt ^{2®}
Installation Methods	Ashlar, Herringbone





Carpet Product WW865 **Colour** Highland Warp
LVT Product Textured Woodgrains **Colour** Grey Dune **Installed** Ashlar



Product WW870 **Colour** Natural Weft **Installed** Herringbone

WW865™ Colourline

Specifications



8110-003-000 Highland Warp


GlasBac®



8110-004-000 Moorland Warp

GlasBac®

Style Code	8110 Pattern 000
Product Definition	Tufted Textured Loop
Yarn/Fibre	100% Recycled Solution Dyed Nylon
Machine Gauge	Tapestry
Pile Thickness	2.5mm +/- 0.5mm
Total Thickness	6.0mm +/- 0.5mm
Tile Size	25x100cm
Area of Use	Commercial – Heavy Use
Lifetime Antimicrobial	Intersept®
Soil/Stain Protection	Protekt ² ®
Installation Methods	Ashlar, Herringbone



WW870™ Colourline

Specifications



8111-003-000 Charcoal Weft


GlasBac®



8111-006-000 Natural Weft

GlasBac®

Style Code	8111 Pattern 000
Product Definition	Tufted Textured Loop
Yarn/Fibre	100% Recycled Solution Dyed Nylon
Machine Gauge	1/12
Pile Thickness	3.0mm +/- 0.5mm
Total Thickness	6.5mm +/- 0.5mm
Tile Size	25x100cm
Area of Use	Commercial – Heavy Use
Lifetime Antimicrobial	Intersept®
Soil/Stain Protection	Protekt ² ®
Installation Methods	Ashlar, Herringbone





LVT Meet Carpet

Why Our Modular Resilient LVT?

Integrated System.

Say goodbye to transition strips and doubling up. Our modular resilient floorings are made to work as a system with our modular Carpet tile. The compatible size and height of our products allow you to integrate modular carpet for an inset rug or an adjacent field – no transition strips required. You'll avoid doubling up on materials and save cost.

Real Flexibility.


Create a unique look that lasts. Interface modular resilient LVT makes it easy to extend the life of your floor. From simple maintenance like damp mopping to selectively replacing damaged tiles, your flooring investment will stand the test of time - beautifully and effortlessly.

Circular System.

Keep flooring out of the landfill. Our modular resilient LVT is produced with a controlled material stream so it can be reclaimed and recycled into our GlasBac® RE recycled content backing through our ReEntry® program.

Noise Reduction.

Less distractions. Interface is helping create **+Positive spaces™** with our LVT with Sound Choice™ backing. It's Quiet Mark™ certified for its superior noise reduction qualities, offering you best-in-class performance for reduced impact sound and floor to floor sound transmission.

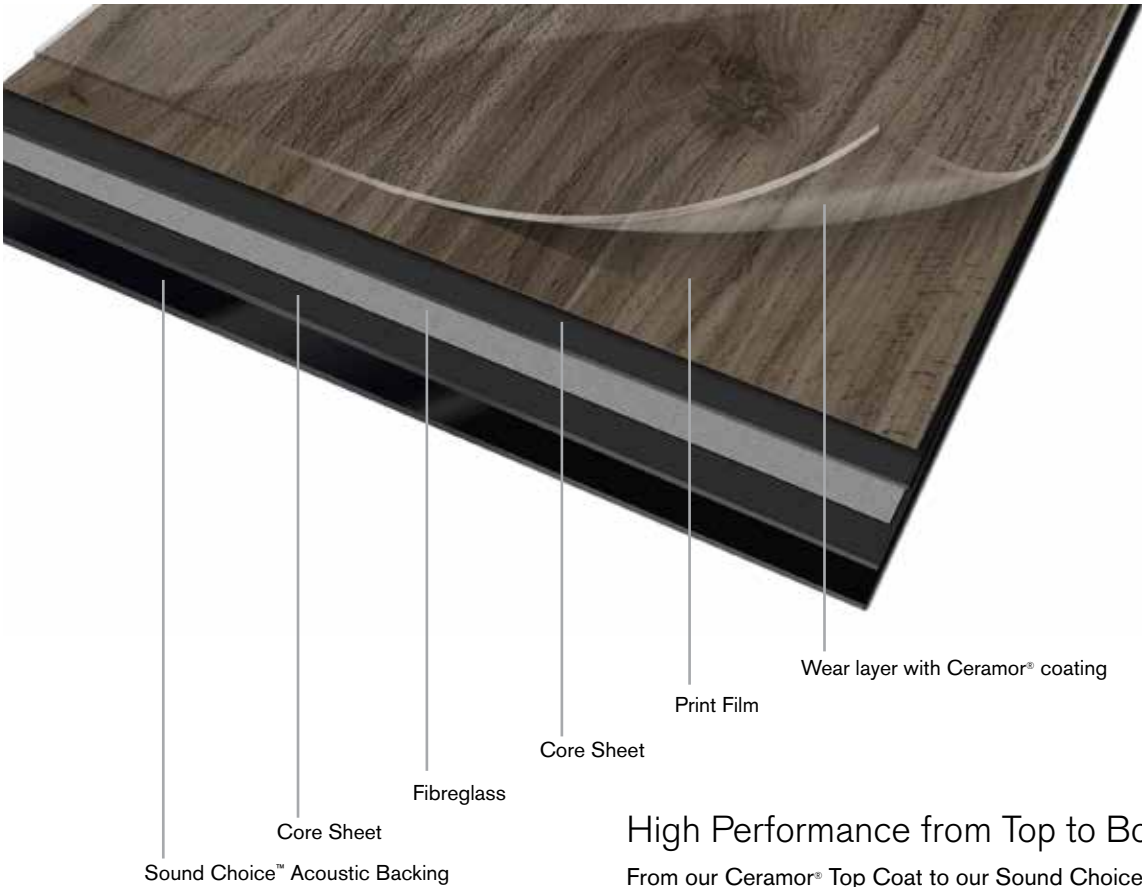

High Performance from Top to Bottom.

From our Ceramor® Top Coat to our Sound Choice™ backing, we have designed our modular resilient LVT to provide peak performance in even the most challenging work environments while also providing superior sound absorption.

Abrasion Resistance. Our Ceramor® ceramic bead coating provides a durable finish that resists scratching and scuffing so your floors look better, longer. Embossing adds texture to further enhance durability.

A Strong Core. Incorporating a fibreglass layer between two core sheets provides optimal dimensional stability and flexibility, allowing for a fully modular installation and the ability to move and update with ease.

Quiet Comfort. (or just “Quiet.”) With an IIC rating of 57 our Sound Choice™ backing provides superior protection against vertical sound transfer. Minimizing noise enhances workplace productivity and creates more usable, comfortable spaces.



Product Textured Stones **Colour** Warm Polished Cement **Installed** Monolithic

LVT Level Set™ Collection | Stones Colourline



A003-08
Textured Stones - Light Concrete



A003-09
Textured Stones - Medium Concrete



A003-11
Textured Stones - Distressed Concrete



A003-01
Textured Stones - Polished Cement



A003-02
Textured Stones - Cool Polished Cement



A003-03
Textured Stones - Warm Polished Cement



A003-10
Textured Stones - Dark Concrete



A001-01
Natural Stones - Jet Mist




Product Textured Woodgrains **Colour** Antique Light Oak **Installed** Ashlar

LVT Level Set™ Collection | Woodgrains Colourline



A002-01
Natural Woodgrains - Black Walnut

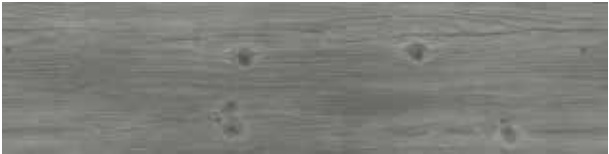

A002-06
Natural Woodgrains - Winter Grey



A002-03
Natural Woodgrains - Chestnut



A002-08
Natural Woodgrains - Sand Dune



A002-04
Natural Woodgrains - Beech



A002-11
Natural Woodgrains - Washed Maple



A002-05
Natural Woodgrains - Storm

LVT Level Set™ Collection | Woodgrains Colourline



A004-07
Textured Woodgrains - White Wash



A004-03
Textured Woodgrains - Distressed Hickory



A004-16
Textured Woodgrains - Antique Dark Oak



A004-14
Textured Woodgrains - Antique Maple



A004-01
Textured Woodgrains - Distressed Walnut



A004-11
Textured Woodgrains - Dark Walnut



A004-06
Textured Woodgrains - Antique Light Oak



A004-15
Textured Woodgrains - Antique Oak



A004-19
Textured Woodgrains - Antique Ash Oak



A004-18
Textured Woodgrains - Charcoal Dune



A004-17
Textured Woodgrains - Silver Dune



A004-05
Textured Woodgrains - Grey Dune

Specifications - Woodgrains

Product Name / Number	Natural Woodgrains - 002 Textured Woodgrains - 004
Product Construction	High Performance Luxury Vinyl Plank
Wear Layer Thickness	0.55 mm
Total Thickness (Metric)	4.5 mm
Classification	EN 651 Class 33 (heavy contract) EN 651 Class 42 (light industrial general)
Acoustic Impact Noise Reduction	ISO 140.8 ΔLw = 16dB
Finish	Ceramor® UV Stabilized Ceramic Bead Coating
Nominal Dimensions	25cm x 100cm
Performance Specifications	
Critical Heat Flux	AS ISO 9239-1 >7kW/m2
Smoke Rate	AS ISO 9239-1 <750%.min
Size, Tolerance	ISO 24342 >400mm < 0.35mm ISO 24342 <400mm < 0.25mm
Dimensional Stability	ISO 23999 <0.25%
Thickness	ISO 24346 Average value + 0.20mm
Resistance to Light	ISO 105-B02 ≥6
Resistance to Heat	ASTM F1514 ΔE< 8 avg Max
Resistance to Chemicals	EN-ISO 26987 Pass
Reaction to Fire	EN ISO 13501-1 Class BFI-S1
VOC Test	ISO 10580 Pass
Flexibility	ISO 24344 Method A Pass
Static Load	ASTM F970 ≤0.005" with 1500 psi
Castor chair	ISO 4918 Pass
Thermal Conductivity	EN 12667 0.16 W/mK
Static Electrical	EN 1815 <2kV
Environmental Specifications	
Ingredients and Life Cycle Impacts	EPD for LVT
Sustainability Assessment	NSF/ANSI 332, Meets Certification Guidelines
LEED v4	Contributes to IEO: Low Emitting Materials; M&R: EPD and EPR
End of Life	Fully Recyclable to carpet tile Backing Recycling
Technical Information	
Installation	See Interface LVT Installation Guidelines online
Maintenance	See Interface LVT Maintenance Guidelines online
Reclamation	Recyclable through ReEntry®
Warranty	15 Year Standard LVT Product Warranty
Installation Methods	Ashlar Herringbone



Specifications - Stones

Product Name / Number	Natural Stones - A001 Textured Stones - A003
Product Construction	High Performance Luxury Vinyl Tile
Wear Layer Thickness	0.55 mm
Total Thickness (Metric)	4.5 mm
Classification	EN 651 Class 33 (heavy contract) EN 651 Class 42 (light industrial general)
Acoustic Impact Noise Reduction	ISO 140.8 ΔLw = 16dB
Finish	Ceramor® UV Stabilized Ceramic Bead Coating
Nominal Dimensions	50cm x 50cm

Performance Specifications

Critical Heat Flux	AS ISO 9239-1 >7kW/m2
Smoke Rate	AS ISO 9239-1 <750%min
Size, Tolerance	ISO 24342 >400mm < 0.35mm ISO 24342 <400mm < 0.25mm ISO 23999 <0.25% ISO 24346 Average value + 0.20mm
Dimensional Stability	ISO 105-B02 ≥6
Thickness	ASTM F 1514 ΔE< 8 avg Max
Resistance to Light	EN-ISO 26987 Pass
Resistance to Heat	EN ISO 13501-1 Class BFI-S1
Resistance to Chemicals	ISO 10580 Pass
Reaction to Fire	ISO 24344 Method A Pass
VOC Test	ASTM F970 ≤0.005" with 1500 psi
Flexibility	ISO 4918 Pass
Static Load	EN 12667 0.16 W/mK
Castor chair	EN 1815 <2kV
Thermal Conductivity	
Static Electrical	


Environmental Specifications

Ingredients and Life Cycle Impacts	EPD for LVT
Sustainability Assessment	NSF/ANSI 332, Meets Certification Guidelines
LEED v4	Contributes to IEQ: Low Emitting Materials; M&R: EPD and EPR
End of Life	Fully Recyclable to carpet tile Backing Recycling

Technical Information

Installation	See Interface LVT Installation Guidelines online
Maintenance	See Interface LVT Maintenance Guidelines online
Reclamation	Recyclable through ReEntry®
Warranty	15 Year Standard LVT Product Warranty

Installation Methods	Non Directional Brick Monolithic Quarter-Turn Ashlar
----------------------	--



Carbon Neutral Floors™
All of our products are carbon neutral and our programme is verified by an independent third party, Bureau Veritas.



All Interface manufacturing facilities in the Asia Pacific region maintain registration to ISO 9001 Quality Management Systems and ISO 14001 Environmental Management Systems.

Production specifications are subject to normal manufacturing tolerances and may be changed without notice. Slight variation in colour among different production lots are normal and should be considered in the overall installation plan. Products covered by manufacturer's written warranty only. All other warranties, including without limitation any implied warranties of merchantability or fitness for particular purpose, are hereby disclaimed. Contact your representative for written warranty information. Recycled content calculations are based on historical averages by total weight of the product for backings. Yarn/Fibre recycled content calculation excludes backing. We update our recycled content information and other environmental data regularly to reflect changes and advancements in our technology.

As part of Interface's Mission Zero promise to eliminate any negative impact on the environment by 2020, we always consider the environment impact of every creative, manufacturing and building decision. This sample book is printed on recycled paper and with soy based ink. Twenty four virgin trees were saved from our use of 1725kg of recycled paper in the production of 5000 sample books. Energy intensity also decreased and greenhouse gases were reduced. The other reductions came from waste water and solid waste. Through our sample reclamation program, we help keep sample materials out of landfill by re-using them until it is time to recycle these sample materials.

Australia

Interface Australia
local toll free: 1800 804 361
www.interface.com/quickship

02/2019
SF0116T0



Climate change is undeniable. And reversible. Our mission is to prove it.
Join the #ClimateTakeBack and help create a climate fit for life.