


# Environmental Certification Scheme

Carpet Name: CE100

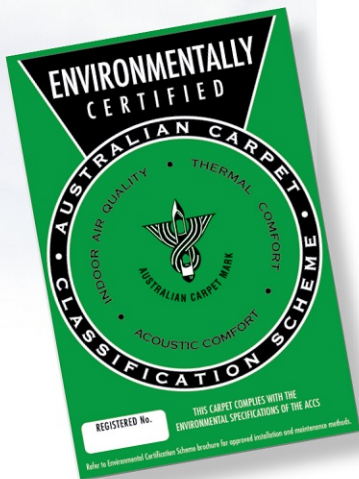

Licensee: INTERFACE  
Licence Number: 1016  
Label Number: 23247

Environmental  
Certification Approved: 25/01/2023

Level: 4

ACCS Contract Grading: CEHD 4\*  
ACCS Residential Grading: NONE  
Suitable for Stairs: Yes

Date Printed: 25/01/2023

**Andrew Martin**  
Secretary ACCS



Administered by the Carpet Institute of Australia Limited ABN 11 006 829 303  
PO Box 7172, St Kilda Road, Melbourne Victoria 8004 Tel: (03) 9804 5559 • Fax: (03) 9804 5560  
Email: info@carpetoz.com.au • www.carpetinstitute.com.au

This certificate remains the property of the Carpet Institute of Australia Limited.

**Carpet Details:**

**Company: INTERFACE**

**Label No: 23247**

**Licence No: 1016**

**Office No: 7356**

**Names:**

CE100

**Details:**

Awarded Res Grade: NONE  
 Awarded Con Grade: CEHD 4\*  
 Registered On: 23/01/2023  
 Active: Yes  
 Date In-Active:  
 Manufacture Method: Tufted  
 Twist Set: N/A  
 Dyeing Method: Melt Dyed  
 #Colours/Designs: 12/  
 Backing Type: Other  
 Felted: N/A  
 Spinning System: BCF  
 Insect Resist Agent: N/A  
 Filament: 23.81  
 Master Product:

**Test Results:**

Pile Mass g/m<sup>2</sup> (oz/yd<sup>2</sup>): 610 (18.0)  
 SPM g/m<sup>2</sup> (oz/yd<sup>2</sup>): 416.4 (12.3)  
 Stated Pile Height (mm): 2.8  
 Minimum Pile Height (mm): 0.0  
 Maximum Pile Height (mm): 0.0  
 Dynamic Loading Loss (%): 0.0  
 Static Loading Loss (%): 0.0  
 Tex (g/1000m): 300  
 Measured Pile Thickness (mm): 2.8  
 Machine Gauge (Tufts/dm): 39.4  
 Meas Tufts Perp to Selvedge: 40.0  
 Meas Tufts Para to Selvedge: 45.0  
 Treated For Soiling Resistance: Yes  
 Soil Resist Inhibitor: Yes  
 Stain Resist Inhibitor: Yes

**Hexapod Scores:**

	Texture		Colour		Thickness	
	WA		WA		(mm)	(%)
1500:	4.0	0.0	4.5	0.0	0.2	6.7
8000:	3.0	0.0	3.5	0.0	0.6	20.0

Quality Assurance Test:

Cut Pile (%): 0  
 Loop Pile (%): 100  
 Panel Assessment Contract: 14  
 Panel Assessment Residential: 14  
 Suitable For Stairs: Yes  
 Tile: Yes SheetGoods: No  
 Fibre Signature: NBA:100

**ACCS Test:**

	Con	Res	Max
SPM/PH Ratio:	14.3	16	16
Volume Density:	14.2	14.2	20
Tuft Density:	8.9	8.9	9
Dyn Load:	3.9	3.9	5
Stat Load:	4.1	4.1	5
Soiling Prop:	14	14	16
Abrasion Res:	10	10	10
Sub Total:	69.4	71.1	81
Panel Assess:	14	14	19
Total:	83.4	85.1	100
Calc Residential Grade:	REHD2		6*
Calc Contract Grade:	CHD		3*

**Calculations**

Pile Height(mm): 3.9  
 Tuft Density(per dm<sup>2</sup>): 1800.0  
 GSPM(g/m<sup>2</sup>): 415.0  
 GSPM (abrasive) (g/m<sup>2</sup>): 275.0  
 Soiling Propensity: 12.0 +2.0

**OAF Values**

OAF: 4.2  
 Calc Density (+-5%): 0.14 0.149 0.16  
 Base Fibre: NYLON  
 Benchmarks:  
 RHD1 0 RHD2 3.5  
 REHD1 3.5 REHD2 3.5

**Environmental Classification:**

ECS: Yes  
 Level: 4

	Calc	B/M	P/F
Acoustic:	2.8	3	
Thermal:	18.8	15	PASS
VOC:			
TVOC	120		

**Notes:**

23/1/23 Submitted by X Translavina. 25/1/2023 Panel awarded CEHD(S) 4\* and ECS Level 4.