


# Environmental Certification Scheme

Carpet Name: **MIRROR MIRROR**

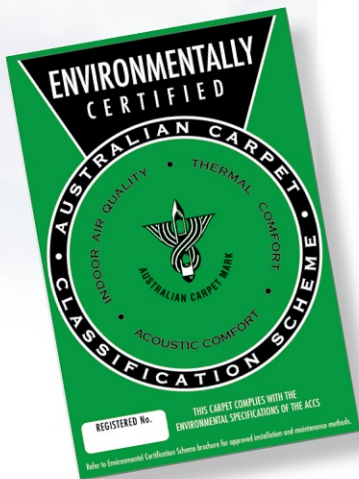

Licensee: **INTERFACE**  
Licence Number: **1016**  
Label Number: **23268**

Environmental  
Certification Approved: **27/03/2023**

Level: **4**

ACCS Contract Grading: **CEHD 4\***  
ACCS Residential Grading: **NONE**  
Suitable for Stairs: **Yes**

Date Printed: **4/04/2023**

**Andrew Martin**  
Secretary ACCS



Administered by the Carpet Institute of Australia Limited ABN 11 006 829 303  
PO Box 7172, St Kilda Road, Melbourne Victoria 8004 Tel: (03) 9804 5559 • Fax: (03) 9804 5560  
Email: info@carpetoz.com.au • www.carpetinstitute.com.au

This certificate remains the property of the Carpet Institute of Australia Limited.

**Carpet Details:****Company: INTERFACE****Label No: 23268****Licence No: 1016****Office No: 7377****Names:**

MIRROR MIRROR

**Details:**

Awarded Res Grade: NONE  
 Awarded Con Grade: CEHD 4\*  
 Registered On: 27/03/2023  
 Active: Yes  
 Date In-Active:  
 Manufacture Method: Tufted  
 Twist Set: N/A  
 Dyeing Method: Melt Dyed  
 #Colours/Designs: 12/  
 Backing Type: Other  
 Felted: N/A  
 Spinning System: BCF  
 Insect Resist Agent: N/A  
 Filament: 23.81  
 Master Product:

**Test Results:**

Pile Mass g/m<sup>2</sup> (oz/yd<sup>2</sup>): 746 (22.0)  
 SPM g/m<sup>2</sup> (oz/yd<sup>2</sup>): 483.85(14.3)  
 Stated Pile Height (mm): 4.0  
 Minimum Pile Height (mm): 4.1  
 Maximum Pile Height (mm): 4.3  
 Dynamic Loading Loss (%): 0.0  
 Static Loading Loss (%): 0.0  
 Tex (g/1000m): 268  
 Measured Pile Thickness (mm): 4.2  
 Machine Gauge (Tufts/dm): 39.4  
 Meas Tufts Perp to Selvedge: 40.0  
 Meas Tufts Para to Selvedge: 43.0  
 Treated For Soiling Resistance: Yes  
 Soil Resist Inhibitor: Yes  
 Stain Resist Inhibitor: Yes

**Hexapod Scores:**

	Texture		Colour		Thickness	
	WA		WA		(mm)	(%)
1500:	4.0	0.0	4.5	0.0	0.1	2.5
8000:	3.0	0.0	4.0	0.0	0.6	15.0

**Quality Assurance Test:**

Cut Pile (%): 0  
 Loop Pile (%): 100  
 Panel Assessment Contract: 14  
 Panel Assessment Residential: 14  
 Suitable For Stairs: Yes  
 Tile: Yes SheetGoods: No  
 Fibre Signature: NBA:100

**ACCS Test:**

	Con	Res	Max
SPM/PH Ratio:	14.3	16	16
Volume Density:	12.1	12.1	20
Tuft Density:	8.5	8.5	9
Dyn Load:	3.9	3.9	5
Stat Load:	4.1	4.1	5
Soiling Prop:	14	14	16
Abrasion Res:	10	10	10
Sub Total:	66.9	68.6	81
Panel Assess:	14	14	19
Total:	80.9	82.6	100
Calc Residential Grade:	REHD2		6*
Calc Contract Grade:	CHD		3*

**Calculations**

Pile Height(mm): 5.3  
 Tuft Density(per dm<sup>2</sup>): 1720.0  
 GSPM(g/m<sup>2</sup>): 415.0  
 GSPM (abrasive) (g/m<sup>2</sup>): 275.0  
 Soiling Propensity: 12.0 +2.0

**OAF Values**

OAF: 4.2  
 Calc Density (+-5%): 0.11 0.115 0.12  
 Base Fibre: NYLON  
 Benchmarks:  
 RHD1 0 RHD2 3.5  
 REHD1 3.5 REHD2 3.5

**Environmental Classification:**

ECS: Yes

Level: 4

	Calc	B/M	P/F
Acoustic:	4.2	3	PASS
Thermal:	36.5	15	PASS
VOC:			
TVOC	120		

**Notes:**

27/3/2023 Submitted by X Translavina. 29/3/2023 Panel awarded CEHD(S) 4\* & ECS Level 4.