

DEDODT

Australian Wool Testing Authority Ltd - trading as AWTA Product Testing A.B.N 43 006 014 106 1st Floor, 191 Racecourse Road, Flemington, Victoria 3031

P.O Box 240. North Melbourne, Victoria 3051


Phone (03) 9371 2400 Fax (03) 9371 2499

	TEST RE	PURI				
Client : Interface Au 34 Airds Roa	stralia Pty Ltd ad		Test I Issue	Number : Date :	15-00235 12/06/201	
Minto NSW 2566				Print Date : Order Number :		5
Sample Description	Clients Ref : "Silver Lining SL910" Striped loop pile carpet tile Colour : Grey Nominal Composition : 100% Solution Nominal Mass per Unit Area/Density :		on 6 2 On a Glasb	ac Backing		
/ISO 9239.1-2003	Reaction to Fire Tests for Floorings. Radiant Heat Source	Determinatio	on of the Bur	ning Behavio	our using a	
	Radiant neat Source					
	Date of Sample Arrival		22/05/2	2015		
			22/05/2 12/06/2			
	Date of Sample Arrival	1			Mean	
	Date of Sample Arrival Date Tested	1 5.1	12/06/2	2015	Mean 4.9	kW/m
	Date of Sample Arrival Date Tested CHF Value		12/06/2 2	3		
	Date of Sample Arrival Date Tested CHF Value Length	5.1	12/06/2 2	3		
	Date of Sample Arrival Date Tested CHF Value Length Width	5.1 5.3	12/06/2 2 4.6 -	2015 3 5.0 -	4.9	kW/m
	Date of Sample Arrival Date Tested CHF Value Length Width Smoke Value	5.1 5.3 1	12/06/2 2 4.6 - 2	2015 3 5.0 - 3	4.9 - Mean	kW/m %.mir
	Date of Sample Arrival Date Tested CHF Value Length Width Smoke Value Length	5.1 5.3 1 119	12/06/2 2 4.6 - 2	2015 3 5.0 - 3	4.9 - Mean	kW/m kW/m %.mir %.mir

conditions of the test, they are not intended to be sole criterion for assessing the potential fire hazard of the product in use.

Sample was conditioned in accordance with BSEN 13238:2001 at a temperature of 23±2°C and relative humidity of 50±5% for a minimum of 48 hours prior to testing.

Each specimen was adhered to a substrate of 6mm thick fibre reinforced cement board using Roberts 656 adhesive and clamped prior to testing.

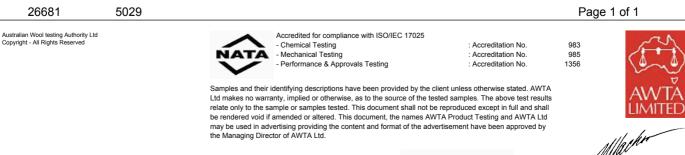

SADY



HAFL A. JACKSON B.Sc.(Hons)

0204/11/06

C

APPROVED SIGNATORY