



## TEST REPORT

|                |                                          |                       |            |
|----------------|------------------------------------------|-----------------------|------------|
| Sample         | Interface China                          | Test Report No:       | R24-134    |
| Manufacturing: | 111 North Dongting Road                  | Sample Received Date: | 20/06/2024 |
|                | Economic Development Area                | Test Date:            | 24/06/2024 |
|                | of Taicang, Taicang City                 | Report Date:          | 24/06/2024 |
|                | Jiangsu Province 215400                  |                       |            |
|                | China                                    |                       |            |
| Sample         | Client Reference: "SR999"                | Test Sponsor:         |            |
| Description:   | Loop Pile Carpet Tile                    |                       |            |
|                | 100% Solution Dyed Nylon 6               | Interface Australia   |            |
|                | 916g/m <sup>2</sup> on a Glasbac Backing |                       |            |

AS ISO 9239.1-2003: Reaction to Fire Tests for Floorings – Determination of the Burning Behaviour Using a Radiant Heat Source

### Results Summary

| CHF Value | Sample 1 | Sample 2 | Sample 3 | Mean |                   |
|-----------|----------|----------|----------|------|-------------------|
| Length    | 7.1      | -        | -        | -    | kW/m <sup>2</sup> |
| Width     | 6.2      | 6.2      | 6.2      | 6.2  | kW/m <sup>2</sup> |

| Smoke Value | Sample 1 | Sample 2 | Sample 3 | Mean |      |
|-------------|----------|----------|----------|------|------|
| Length      | 88       | -        | -        | -    | %min |
| Width       | 89       | 86       | 95       | 90   | %min |

Melting YES

Blistering YES

The test results relate to the behaviour of the test specimens of a product under the particular conditions of the test, they are not intended to be sole criterion for assessing the potential fire hazard of the product in use.

Sample was conditioned in accordance with BS EN 13238 at a temperature of 23±2°C and relative humidity of 50±5% for a minimum of 72 hours prior to testing, which is inclusive of adhesive curing time.

Each Specimen was adhered to a substrate of 9mm Fibre Cement Board using Intertac+ Adhesive.

ALISON ATTENBOROUGH  
Product Technical Manager

APPROVED SIGNATORY



## TEST REPORT

|                |                           |                       |            |
|----------------|---------------------------|-----------------------|------------|
| Sample         | Interface China           | Test Report No:       | R24-134    |
| Manufacturing: | 111 North Dongting Road   | Sample Received Date: | 20/06/2024 |
|                | Economic Development Area | Test Date:            | 24/06/2024 |
|                | of Taicang, Taicang City  | Report Date:          | 24/06/2024 |
|                | Jiangsu Province 215400   |                       |            |
|                | China                     |                       |            |

### Sample 1 Length

### Test Results

|                                                      |                                  |
|------------------------------------------------------|----------------------------------|
| Time to ignition                                     | : 2 minutes 11 seconds (131 s)   |
| Time to flameout                                     | : 36 minutes 32 seconds (2192 s) |
| Extent of burning (mm)                               | : 310                            |
| Critical flux at extinguishment (kW/m <sup>2</sup> ) | : 7.12                           |
| HF-10 (kW/m <sup>2</sup> )                           | : 10.90                          |
| HF-20 (kW/m <sup>2</sup> )                           | : 8.32                           |
| HF-30 (kW/m <sup>2</sup> )                           | : 7.12                           |
| Flame spread at 10 minutes (mm)                      | : 130                            |
| Flame spread at 20 minutes (mm)                      | : 260                            |
| Flame spread at 30 minutes (mm)                      | : 310                            |
| Peak light attenuation (%)                           | : 15.92                          |
| Time to peak light attenuation                       | : 7 minutes 20 seconds (440 s)   |
| Total integrated smoke (%.min)                       | : 87.92                          |

ALISON ATTENBOROUGH  
Product Technical Manager

APPROVED SIGNATORY



## TEST REPORT

Sample Interface China  
Manufacturing: 111 North Dongting Road  
Economic Development Area  
of Taicang, Taicang City  
Jiangsu Province 215400  
China

Test Report No: R24-134  
Sample Received Date: 20/06/2024  
Test Date: 24/06/2024  
Report Date: 24/06/2024


### Sample 1 Length

### Light Attenuation Over Time and Rake Results

Report produced with the Fire Testing Technology FRPSoft software

page 3

### Smoke Graph

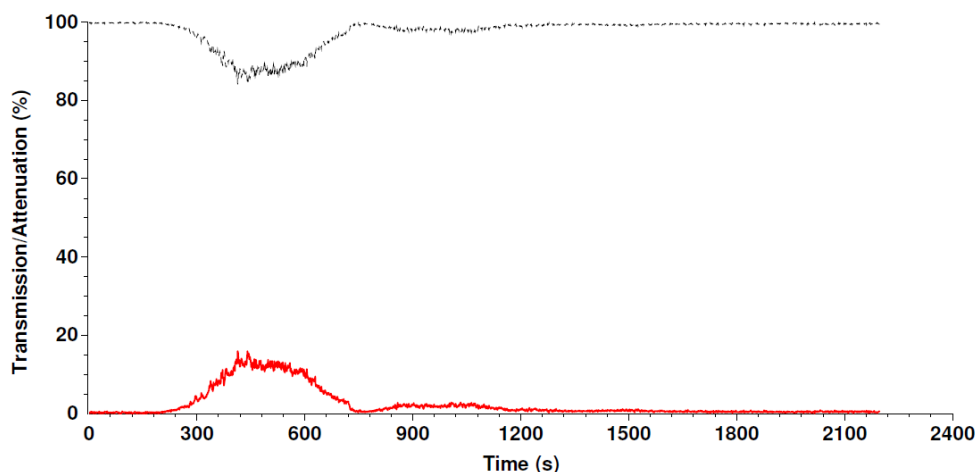

Test name : LENGTH1

File name : C:\FRPSOFT\DATA\24060025.CSV

### Rake Results

| Position (mm) | Time (s) | Flux (kW/m <sup>2</sup> ) | Qsb (MJ/m <sup>2</sup> ) | Position (mm) | Time (s) | Flux (kW/m <sup>2</sup> ) | Qsb (MJ/m <sup>2</sup> ) |
|---------------|----------|---------------------------|--------------------------|---------------|----------|---------------------------|--------------------------|
| 60            | 352      | 12.1                      | 4.246                    | 510           | -        | 3.3                       | -                        |
| 110           | 460      | 11.2                      | 5.152                    | 560           | -        | 2.7                       | -                        |
| 160           | 562      | 10.4                      | 5.871                    | 610           | -        | 2.3                       | -                        |
| 210           | 798      | 9.6                       | 7.640                    | 660           | -        | 1.9                       | -                        |
| 260           | 1095     | 8.3                       | 9.107                    | 710           | -        | 1.6                       | -                        |
| 310           | 1793     | 7.1                       | 12.766                   | 760           | -        | 1.4                       | -                        |
| 360           | -        | 6.0                       | -                        | 810           | -        | 1.2                       | -                        |
| 410           | -        | 4.9                       | -                        | 860           | -        | 1.1                       | -                        |
| 460           | -        | 4.0                       | -                        | 910           | -        | 1.0                       | -                        |

ALISON ATTENBOROUGH  
Product Technical Manager

APPROVED SIGNATORY



## TEST REPORT

|                |                           |                       |            |
|----------------|---------------------------|-----------------------|------------|
| Sample         | Interface China           | Test Report No:       | R24-134    |
| Manufacturing: | 111 North Dongting Road   | Sample Received Date: | 20/06/2024 |
|                | Economic Development Area | Test Date:            | 24/06/2024 |
|                | of Taicang, Taicang City  | Report Date:          | 24/06/2024 |
|                | Jiangsu Province 215400   |                       |            |
|                | China                     |                       |            |

### Sample 1 Width

### Test Results

|                                                      |                                  |
|------------------------------------------------------|----------------------------------|
| Time to ignition                                     | : 2 minutes 14 seconds (134 s)   |
| Time to flameout                                     | : 36 minutes 36 seconds (2196 s) |
| Extent of burning (mm)                               | : 350                            |
| Critical flux at extinguishment (kW/m <sup>2</sup> ) | : 6.21                           |
| HF-10 (kW/m <sup>2</sup> )                           | : 10.45                          |
| HF-20 (kW/m <sup>2</sup> )                           | : 8.08                           |
| HF-30 (kW/m <sup>2</sup> )                           | : 6.89                           |
| Flame spread at 10 minutes (mm)                      | : 160                            |
| Flame spread at 20 minutes (mm)                      | : 270                            |
| Flame spread at 30 minutes (mm)                      | : 320                            |
| Peak light attenuation (%)                           | : 17.75                          |
| Time to peak light attenuation                       | : 8 minutes 09 seconds (489 s)   |
| Total integrated smoke (%.min)                       | : 89.38                          |

ALISON ATTENBOROUGH  
Product Technical Manager

APPROVED SIGNATORY



## TEST REPORT

Sample Interface China  
Manufacturing: 111 North Dongting Road  
Economic Development Area  
of Taicang, Taicang City  
Jiangsu Province 215400  
China

Test Report No: R24-134  
Sample Received Date: 20/06/2024  
Test Date: 24/06/2024  
Report Date: 24/06/2024


### Sample 1 Width

### Light Attenuation Over Time and Rake Results

Report produced with the Fire Testing Technology FRPSoft software

page 3

### Smoke Graph

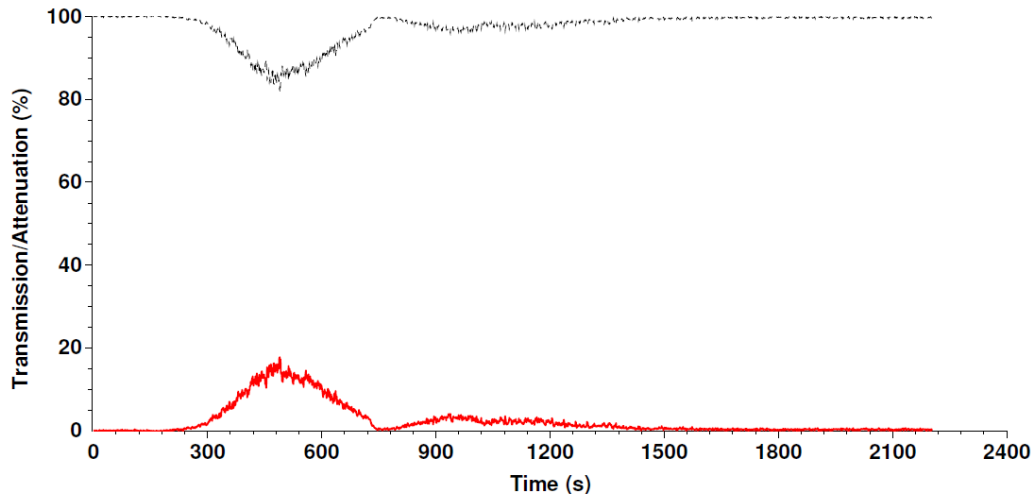

Test name : WIDTH1  
File name : C:\FRPSOFT\DATA\24060026.CSV

### Rake Results

| Position (mm) | Time (s) | Flux (kW/m <sup>2</sup> ) | Qsb (MJ/m <sup>2</sup> ) | Position (mm) | Time (s) | Flux (kW/m <sup>2</sup> ) | Qsb (MJ/m <sup>2</sup> ) |
|---------------|----------|---------------------------|--------------------------|---------------|----------|---------------------------|--------------------------|
| 60            | 328      | 12.1                      | 3.957                    | 510           | -        | 3.3                       | -                        |
| 110           | 452      | 11.2                      | 5.062                    | 560           | -        | 2.7                       | -                        |
| 160           | 592      | 10.4                      | 6.185                    | 610           | -        | 2.3                       | -                        |
| 210           | 915      | 9.6                       | 8.760                    | 660           | -        | 1.9                       | -                        |
| 260           | 1119     | 8.3                       | 9.307                    | 710           | -        | 1.6                       | -                        |
| 310           | 1710     | 7.1                       | 12.175                   | 760           | -        | 1.4                       | -                        |
| 360           | -        | 6.0                       | -                        | 810           | -        | 1.2                       | -                        |
| 410           | -        | 4.9                       | -                        | 860           | -        | 1.1                       | -                        |
| 460           | -        | 4.0                       | -                        | 910           | -        | 1.0                       | -                        |

ALISON ATTENBOROUGH  
Product Technical Manager

APPROVED SIGNATORY



## TEST REPORT

|                |                           |                       |            |
|----------------|---------------------------|-----------------------|------------|
| Sample         | Interface China           | Test Report No:       | R24-134    |
| Manufacturing: | 111 North Dongting Road   | Sample Received Date: | 20/06/2024 |
|                | Economic Development Area | Test Date:            | 24/06/2024 |
|                | of Taicang, Taicang City  | Report Date:          | 24/06/2024 |
|                | Jiangsu Province 215400   |                       |            |
|                | China                     |                       |            |

### Sample 2 Width

### Test Results

|                                                      |                                  |
|------------------------------------------------------|----------------------------------|
| Time to ignition                                     | : 2 minutes 30 seconds (150 s)   |
| Time to flameout                                     | : 41 minutes 26 seconds (2486 s) |
| Extent of burning (mm)                               | : 350                            |
| Critical flux at extinguishment (kW/m <sup>2</sup> ) | : 6.21                           |
| HF-10 (kW/m <sup>2</sup> )                           | : 10.60                          |
| HF-20 (kW/m <sup>2</sup> )                           | : 8.57                           |
| HF-30 (kW/m <sup>2</sup> )                           | : 7.12                           |
| Flame spread at 10 minutes (mm)                      | : 150                            |
| Flame spread at 20 minutes (mm)                      | : 250                            |
| Flame spread at 30 minutes (mm)                      | : 310                            |
| Peak light attenuation (%)                           | : 16.01                          |
| Time to peak light attenuation                       | : 7 minutes 45 seconds (465 s)   |
| Total integrated smoke (%.min)                       | : 85.74                          |

ALISON ATTENBOROUGH  
Product Technical Manager

APPROVED SIGNATORY



## TEST REPORT

Sample Interface China  
Manufacturing: 111 North Dongting Road  
Economic Development Area  
of Taicang, Taicang City  
Jiangsu Province 215400  
China

Test Report No: R24-134  
Sample Received Date: 20/06/2024  
Test Date: 24/06/2024  
Report Date: 24/06/2024


### Sample 2 Width

### Light Attenuation Over Time and Rake Results

Report produced with the Fire Testing Technology FRPSoft software

page 3

### Smoke Graph

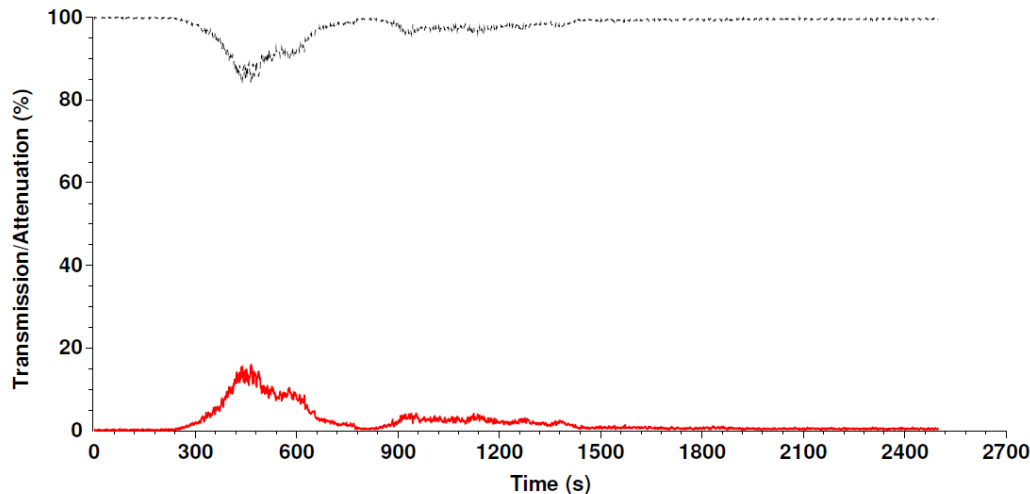

Test name : WIDTH2  
File name : C:\FRPSOFT\DATA\24060027.CSV

### Rake Results

| Position (mm) | Time (s) | Flux (kW/m <sup>2</sup> ) | Qsb (MJ/m <sup>2</sup> ) | Position (mm) | Time (s) | Flux (kW/m <sup>2</sup> ) | Qsb (MJ/m <sup>2</sup> ) |
|---------------|----------|---------------------------|--------------------------|---------------|----------|---------------------------|--------------------------|
| 60            | 343      | 12.1                      | 4.138                    | 510           | -        | 3.3                       | -                        |
| 110           | 457      | 11.2                      | 5.118                    | 560           | -        | 2.7                       | -                        |
| 160           | 696      | 10.4                      | 7.271                    | 610           | -        | 2.3                       | -                        |
| 210           | 1059     | 9.6                       | 10.139                   | 660           | -        | 1.9                       | -                        |
| 260           | 1258     | 8.3                       | 10.463                   | 710           | -        | 1.6                       | -                        |
| 310           | 1744     | 7.1                       | 12.417                   | 760           | -        | 1.4                       | -                        |
| 360           | -        | 6.0                       | -                        | 810           | -        | 1.2                       | -                        |
| 410           | -        | 4.9                       | -                        | 860           | -        | 1.1                       | -                        |
| 460           | -        | 4.0                       | -                        | 910           | -        | 1.0                       | -                        |

ALISON ATTENBOROUGH  
Product Technical Manager

APPROVED SIGNATORY





## TEST REPORT

|                |                           |                       |            |
|----------------|---------------------------|-----------------------|------------|
| Sample         | Interface China           | Test Report No:       | R24-134    |
| Manufacturing: | 111 North Dongting Road   | Sample Received Date: | 20/06/2024 |
|                | Economic Development Area | Test Date:            | 24/06/2024 |
|                | of Taicang, Taicang City  | Report Date:          | 24/06/2024 |
|                | Jiangsu Province 215400   |                       |            |
|                | China                     |                       |            |

### Sample 3 Width

### Test Results

|                                                      |                                  |
|------------------------------------------------------|----------------------------------|
| Time to ignition                                     | : 2 minutes 25 seconds (145 s)   |
| Time to flameout                                     | : 37 minutes 49 seconds (2269 s) |
| Extent of burning (mm)                               | : 350                            |
| Critical flux at extinguishment (kW/m <sup>2</sup> ) | : 6.21                           |
| HF-10 (kW/m <sup>2</sup> )                           | : 10.45                          |
| HF-20 (kW/m <sup>2</sup> )                           | : 8.32                           |
| HF-30 (kW/m <sup>2</sup> )                           | : 6.67                           |
| Flame spread at 10 minutes (mm)                      | : 160                            |
| Flame spread at 20 minutes (mm)                      | : 260                            |
| Flame spread at 30 minutes (mm)                      | : 330                            |
| Peak light attenuation (%)                           | : 14.44                          |
| Time to peak light attenuation                       | : 8 minutes 59 seconds (539 s)   |
| Total integrated smoke (%.min)                       | : 95.1                           |

ALISON ATTENBOROUGH  
Product Technical Manager

APPROVED SIGNATORY





## TEST REPORT

Sample Interface China  
Manufacturing: 111 North Dongting Road  
Economic Development Area  
of Taicang, Taicang City  
Jiangsu Province 215400  
China

Test Report No: R24-134  
Sample Received Date: 20/06/2024  
Test Date: 24/06/2024  
Report Date: 24/06/2024


### Sample 3 Width

### Light Attenuation Over Time and Rake Results

Report produced with the Fire Testing Technology FRPSoft software

page 3

### Smoke Graph

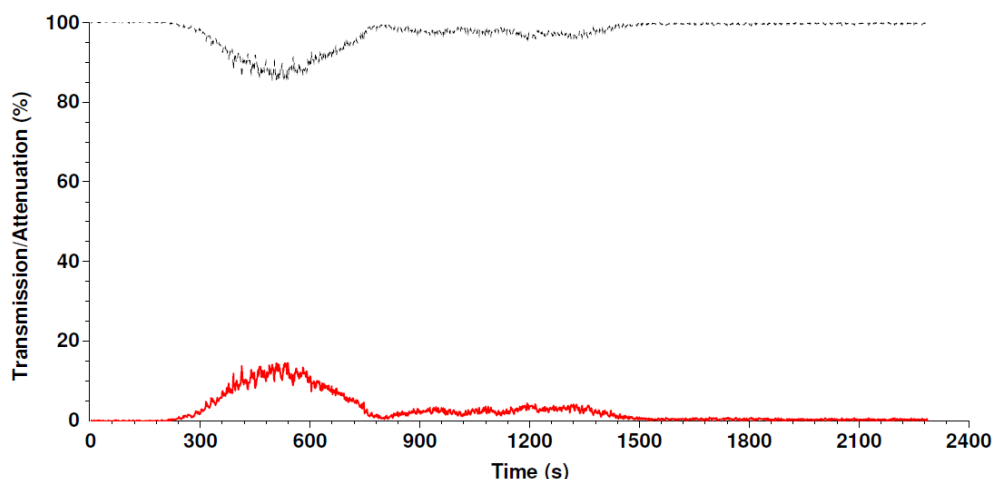

Test name : WIDTH3  
File name : C:\FRPSOFT\DATA\24060028.CSV

### Rake Results

| Position (mm) | Time (s) | Flux (kW/m <sup>2</sup> ) | Qsb (MJ/m <sup>2</sup> ) | Position (mm) | Time (s) | Flux (kW/m <sup>2</sup> ) | Qsb (MJ/m <sup>2</sup> ) |
|---------------|----------|---------------------------|--------------------------|---------------|----------|---------------------------|--------------------------|
| 60            | 372      | 12.1                      | 4.487                    | 510           | -        | 3.3                       | -                        |
| 110           | 430      | 11.2                      | 4.816                    | 560           | -        | 2.7                       | -                        |
| 160           | 561      | 10.4                      | 5.861                    | 610           | -        | 2.3                       | -                        |
| 210           | 864      | 9.6                       | 8.272                    | 660           | -        | 1.9                       | -                        |
| 260           | 1112     | 8.3                       | 9.249                    | 710           | -        | 1.6                       | -                        |
| 310           | 1565     | 7.1                       | 11.143                   | 760           | -        | 1.4                       | -                        |
| 360           | -        | 6.0                       | -                        | 810           | -        | 1.2                       | -                        |
| 410           | -        | 4.9                       | -                        | 860           | -        | 1.1                       | -                        |
| 460           | -        | 4.0                       | -                        | 910           | -        | 1.0                       | -                        |

END OF REPORT

ALISON ATTENBOROUGH  
Product Technical Manager

APPROVED SIGNATORY